INFRALED®

1 LIGHT SYSTEM - 360°

MRR-12622

LED Remote Controlled Motorized Recessed Patient Lighting System



- · ICU · CCU · ED
- NICU/PICU
- PATIENT ROOM
- CATH LAB













Performance: Cool LED beam with excellent color rendering of

red tissue and skin tones: 95+ CRI (with high R9, R13 and R15). Up to 5700 footcandles delivered

from the one light system.

Function: Precise adjustability of direction and brightness.

Design: Inconspicuous, fully recessed luminaire. Smooth

white $\mathsf{BioGard}^{\mathsf{TM}}$ anti-microbial finish. Redundant

controls.

Use: Fast, single-hand adjustability using either infrared

remote or wall control. Maintenance free 60,000

hour life LEDs.



MRR-12622

INFRALED® 1 LIGHT SYSTEM - 360°

LED INFRARED REMOTE CONTROLLED ADJUSTABLE LIGHTING SYSTEM

Features

This lighting system features one fully recessed luminaire plus a wall control and a remote control:

Luminaire Offers:

- Up to 3000 delivered lumens
- Exclusive OPTeCOLOR™ LEDs with 95+ CRI, high R9 value of 85, cool beam and 60,000 hour life (L70); standard 3500°K, optional 5000°K
- Rotates 360° and tilts up to 35° either side of nadir; optional 15° bottom pan allows lighthead to tilt up to 50° in one direction
- 0-10V CCR 100-10% dimming
- BioGard™ anti-microbial white regressed smooth flare architectural trim with tempered clear flat glass lens
- IP65 optional
- Lightweight construction for easy installation in any ceiling (27 pounds)
- Completely serviceable through the aperture; convenient plug-in components for easy installation and service

 Meets IEC/EN 60601-1-2 electromagnetic compatibility standard for medical electrical equipment. FCC Part 15 certified for EMI/RFI emissions

Wall Control / Remote Offers:

- Full control of light from both wall control and remote control
- Tactile membrane controls for power, intensity (100-10%) and direction
- Smooth surfaces for easy cleaning with isopropyl alcohol


Wall Control Also Features:

- Magnetic docking station for remote control storage
- Non-conductive wall plate assembly

Remote Control Also Features:

- Infrared control signals are invisible and will not interfere with other medical equipment.
- Durable; withstands common mishaps (dropped on the floor)
- Exclusive loss deterring beeper

UL, C-UL (Canada) Listed • Type IC Rated • Exclusive Three Year Warranty • Designed and Produced in U.S.A.

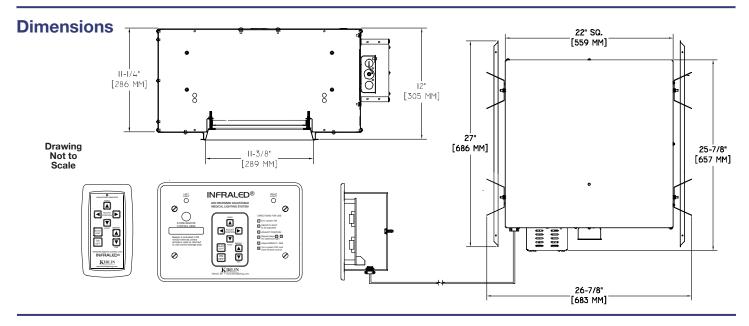

Options The following Options are available for MRR-12622. Add Option as suffix to catalog number. Example: MRR-12622-IP-SE.

Input Power

- -120 120V (50-60Hz) input and thermal protector.
- -58 277/120 volt stepdown transformer for 277 volt line input, prewired into fixture; with 277 volt thermal protector.
- -97 For other input supply voltages, consult factory.
- -98 347/120 volt stepdown transformer for 347 volt line input, prewired into fixture; with 120 volt thermal protector. Adds 10 watts to each fixture load.

Color Temperature (CCT)

-50K 5000°K instead of 3500°K. 95+ CRI. -41K 4100°K instead of 3500°K. 95+ CRI.

Trim

- -32 White oversize trim ring. Specify O.D.-94 Custom color self-flanged flare trim
 - 4 Custom color self-flanged flare trim instead. Consult factory.
- -IP IP65 rated trim and lens.

Other

-81 15° bottom pan achieves 50° high angle illumination in one direction. Maximum recessed depth 15-1/8".

- -87 Custom length (> 35 feet) plenum rated wall control cables (4). Specify length.
- -99 Special modification. Consult factory.
- -BI Beeper (remote control) inactivated by factory.
- -RC Extra remote control.
- -RS Remote infrared sensor with 35' cable.
- -SE Fixture modified for seismic anchorage (by others). Meets California OSHPD


and International Building Codes.

LED INFRARED REMOTE CONTROLLED ADJUSTABLE LIGHTING SYSTEM


INFRALED® 1 LIGHT SYSTEM - 360°

MRR-12622


Typical Side View

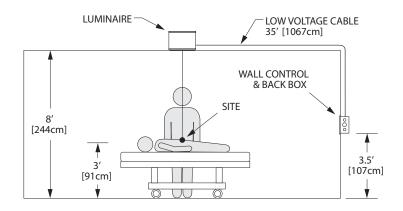


Typical Top View




INFRALED® Footcandle Performance



8' Ceiling: 3' Work Plane 5610 fc 3'4" Work Plane 6420 fc



9' Ceiling: 3' Work Plane 3900 fc 3'4" Work Plane 4370 fc





10' Ceiling: 3' Work Plane 2870 fc 3'4" Work Plane 3160 fc

Performance at a Glance*

Photometric testing by I.T.L. (Boulder, CO) I.T.L. Test No. 83197







Total System Watts (1 luminaire) 120V (Standard): 70W 277V (Option -58): 70W

277V (Option -58): 70W 347V (Option -98): 80W

Cone of Light Key

Ft. Distance from fixture
FC Footcandles at nadir (0°)
Dia. Circle of light at 50% of FC

* Dia. (in ft.) shown is where FC value is half the FC at nadir.

LED manufacturers maintain a tolerance of ±7% on flux (lumens) and power (electrical) measurements. Kirlin photometrics are actual test data from Independent Testing Laboratories (ITL) where photometry was measured from 3742 lumen (64W) light engines (within the established tolerance).

MRR-12622

INFRALED® 1 LIGHT SYSTEM - 360°

LED INFRARED REMOTE CONTROLLED ADJUSTABLE LIGHTING SYSTEM

The lighting system includes both an infrared remote control and a flush wall control panel. Both provide full control of the lighting system including on/off, direction and intensity. A designated docking station on the wall control panel has been provided for storage of the remote control when not in use.

Remote and Wall Control Features:

- Redundant full function controls for:
 - Power
 - Intensity (dimmer or brighter)
 - Direction (rotates 360° with tilt up to 35° from either side of nadir.
- Convenient one hand operation.
- Tactile-membranes and smooth surfaces for easy cleaning.


Wall Control (only) Features:

- Includes infrared receiver.
- Magnetic docking station for remote control.
- Less than 1 microamp current leakage from front of wall control panel.
- Back box provided by Kirlin.


Remote Control (only) Features:

- Invisible infrared signal will not interfere with other equipment in the room.
- Impact resistant construction to withstand common mishaps (dropped on floor).
- Loss deterring beeper to remind user to return remote to docking station on wall control panel.
 Beeper is activated if remote control is not used for, nor returned to wall control panel within 1 hour.
- 9 volt standard battery provided.
- Low stand-by current assures long battery life.
- Back side has special "write-on" area for marking room location.


WALL CONTROL PANEL (INSTALLED IN ROOM WALL)

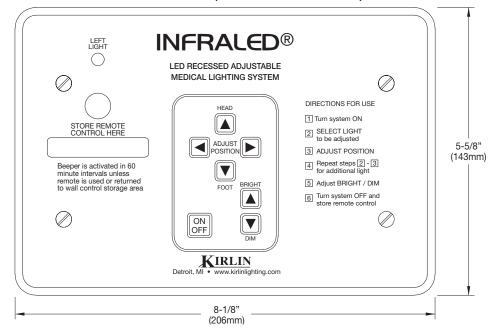

REMOTE CONTROL FRONT

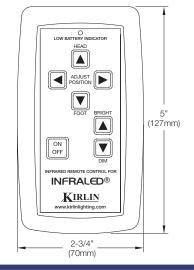

REMOTE CONTROL BACK



SUBMITTAL DATA

APPROVAL STAMP

ARRA

JOB NAME

TYPE VOLTAGE

CATALOG NUMBER



THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232 (313) 259-6400 • Fax: (313) 259-3121 • www.kirlinlighting.com • info@kirlinlighting.com