

Gazelle Express

1000 - 2000 Lumens • Type IC • Wet Location

Lighting Innovators Since 1895




**Kirlin Quality Recessed LED Luminaires
Ship Complete within 5 Business Days**



Type IC • 1% Dimming • 3500°K Standard • 2000 or 1500 Delivered Lumens

4" LED Downlight

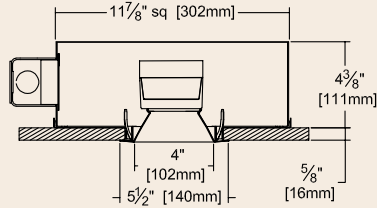

GRR-04102-2000L
GRR-04102-1500L



1988 LUMENS


20.3W

WFL

SC: 1.2

LPW: 98


-2000L SERIES PERFORMANCE



Cone of Light ▲

Dist.	FC	Dia.
6	28.3	7.2
8	15.9	9.6
10	10.2	12.0
12	7.1	14.4
14	5.2	16.8
16	4.0	19.2

6" LED Downlight

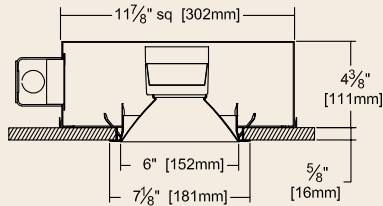

GRR-06103-2000L
GRR-06103-1500L



1984 LUMENS


19.9W

WFL

SC: 1.2

LPW: 100


-2000L SERIES PERFORMANCE



Cone of Light ▲

Dist.	FC	Dia.
6	27.7	7.3
8	15.6	9.8
10	10.0	12.2
12	6.9	14.7
14	5.1	17.1
16	3.9	19.5

5" LED "Dead Front" Shower Light

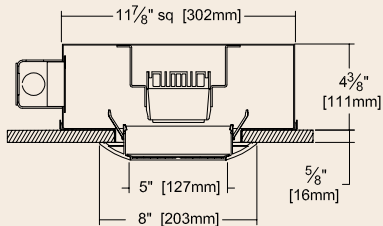

GRR-05110-2000L
GRR-05110-1500L



1351 LUMENS


20.3W

WFL

SC: 1.2

LPW: 67


-2000L SERIES PERFORMANCE



Cone of Light ▲

Dist.	FC	Dia.
6	14.0	7.1
8	7.9	9.5
10	5.0	11.9
12	3.5	14.3
14	2.6	16.7
16	2.0	19.0

4" Square LED Downlight

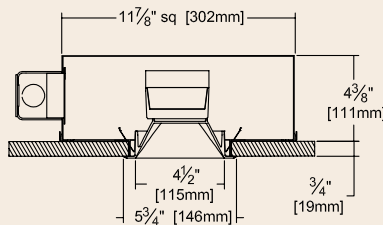

GRS-04142-2000L
GRS-04142-1500L



2087 LUMENS


20.2W

WFL

SC: 1.2

LPW: 103

-2000L SERIES PERFORMANCE



Cone of Light ▲

Dist.	FC	Dia.
6	29.9	7.1
8	16.8	9.5
10	10.8	11.9
12	7.5	14.2
14	5.5	16.6
16	4.2	19.0




Type IC • 10% Dimming • 3500°K Standard • 2000,1500, or 1000 Delivered Lumens

4" Round Downlight



GRR-04202-2000L
GRR-04202-1500L
GRR-04202-1000L

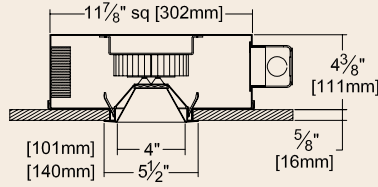

1538 LUMENS


20.9W

WFL

SC: 0.9

LPW: 74

-1500L SERIES PERFORMANCE




Cone of Light ▲

Dist.	FC	Dia.
6	46.4	5.6
8	26.1	7.4
10	16.7	9.3
12	11.6	11.2
14	8.5	13.0
16	6.5	14.9

6" Round Downlight



GRR-06203-2000L
GRR-06203-1500L
GRR-06203-1000L

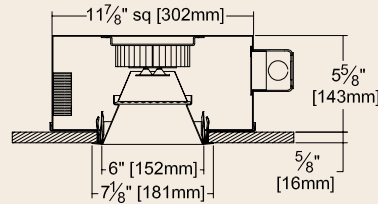

1855 LUMENS


25.7W

WFL

SC: 1.2

LPW: 72

-2000L SERIES PERFORMANCE




Cone of Light ▲

Dist.	FC	Dia.
6	32.9	7.1
8	18.5	9.5
10	11.9	11.8
12	8.2	14.2
14	6.1	16.6
16	4.6	18.9

4" Lensed Downlight



GRR-04205-2000L
GRR-04205-1500L
GRR-04205-1000L

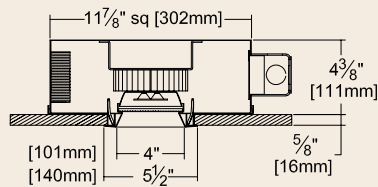

1363 LUMENS


21.0W

WFL

SC: 1.1

LPW: 65

-1500L SERIES PERFORMANCE




Cone of Light ▲

Dist.	FC	Dia.
6	18.9	6.6
8	10.6	8.8
10	6.8	11.1
12	4.7	13.2
14	3.5	15.4
16	2.7	17.6

6" Lensed Downlight



GRR-06219-2000L
GRR-06219-1500L
GRR-06219-1000L

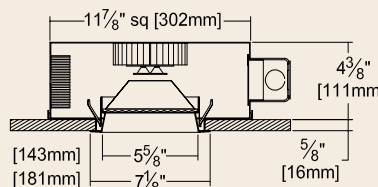

1514 LUMENS


21.2W

WFL

SC: 1.1

LPW: 71

-1500L SERIES PERFORMANCE



Cone of Light ▲

Dist.	FC	Dia.
6	26.4	6.6
8	14.8	8.8
10	9.5	11.0
12	6.6	13.2
14	4.8	15.4
16	3.7	17.6

Gazelle Express

Program Details

- 8 specification quality, shallow depth, energy efficient LED luminaires.
- Luminaires standard with 0-10V dimming down to 1% or 10%, LM-80 qualified, LM-79 certified photometry, multi-voltage (120-277V). Standard 3500°K and wide flood distribution. See Options for other Color Temperatures and Distributions.
- UL, C-UL Listed: Wet, Damp, Dry Locations, Covered Ceilings and Type IC.
- Options (See individual Submittal Sheets for availability):
 - 45 Gasket between trim flange and ceiling
 - 46 Gasket between lens and trim
 - 30K 3000°K color temperature instead of 3500°K
 - 41K 4100°K color temperature instead of 3500°K
 - EI Remote emergency inverter for 100% rated lumen output; 120 or 277V, 60 Hz input; specify voltage
 - MFL Medium flood distribution
 - NFL Narrow flood distribution
 - SPT Spot distribution
- Orders received by 10:00 AM (Eastern time) ship by 5:00 pm **within 5 business days.**
- Consult Factory for quantities greater than 200 units.
- Freight allowed: Over \$8000.

For additional options, see LATITUDES LED Lighting Catalog

Please consult www.kirlinlighting.com for the most current and complete luminaire and Gazelle Express information



MADE IN THE USA



THE **KIRLIN** COMPANY

3401 East Jefferson Avenue • Detroit, MI 48207-4232
www.kirlinlighting.com • 313-259-6400