KIRLIN
Lighting the Future Since 1895

CATALOG #		TYPE
JOB NAME	WATTAGE	VOLTAGE

Choice Series | Empower CONNECT

LRC-06VND

Ligature & Vandal 6" Downlight • COB LED

50,000+ Hours • Type IC • 0-10V 1.0% or DMX 0.1% Dimming
2 or 3 Step Binning • Wet Listed • LM-80 and LM-79 Certified

Trim Options



-RWF



-RBN
(Brushed Nickel Finish)

Specifications

Delivered System Performance
- Nominal Lumens: **Must Specify**

Type IC	Non-IC
-4000L	**-7000L**
-3000L	**-6000L**
-2500L	**-5000L**
-2000L	**-1500L RGBW**
-1500L	
-1000L	

- Select trim & beam distribution: see chart
- Select color (CCT): see chart; 80+ CRI standard; Option -HC for 90+ (15% lumen loss)
- 60,000 hour life, 50,000 in insulation (L70)

Thermal Management System
- Aluminum heat sink and components for cool operation, long life, and low maintenance

LED Driver - INTERNAL or REMOTE
- Indoor/Outdoor: -30°C to 60°C (-22°F to 140°F)
- Remote driver in mini cabinet available, see option -REM
- 0-10V CCR 1.0% dimming standard for internal drivers
- DMX-RDM 0.1% dimming standard for RGBW
- Voltage Options: **Must Specify**
  -120: -120V (50-60Hz); load insensitive
  -277: -277V (50-60Hz); load insensitive
  -57DC: -47-57V DC

IK10-Rated Trim/Lens Assembly
- Ligature resistant smooth tapered self-flanged cast aluminum trim (-RWF is field paintable)
- **-RBN:** Brushed Nickel finish instead
- Tamperproof screws, captive nuts secure trim to housing; tamperproof tool included
- Diffuse acrylic lens above .220" clear polycarbonate; also see Option -WA

Acrylic Enameled Aluminum Housing
- Rustproof: exceeds 1000 hour ASTM 5% salt spray test; all components fully sustainable
- Shallow depth fits restricted plenums
- Cool operation extends component life
- Modular design; visible and fully serviceable through aperture

Outlet Box (Galvanized)
- UL Listed, 14GA, insulated, removable cover
- ½" and ¾" knockouts
- Up to 4 #12 AWG through-branch conductors

Installation & Hardware
- Indoor/outdoor in ceilings up to 1⅛" thick
- Compatible with fire rated enclosures (by others)
- 27" hanger bars & adjusting brackets (2) supplied

Quick Ship Eligible
- Eligible for Quick Ship of 2 weeks or less
- Quantity requirements: 10 - 100 pieces
- Requires choosing options in **red** on the next page and including the -QS option code

UL, C-UL (Canada) & FCC Compliance
- UL File Refrence Product: MRV-06859
- UL Listed: wet, damp or dry locations, covered ceilings
- Type IC up to -4000L; Non-IC for -5000L+ and -1500L (RGBW only)
- FCC Part 15 certified for EMI/RFI emissions

FIVE YEAR Limited Warranty
- Complete standard fixture

Maintenance and Future-Proofing
- M2 maintenance level standard- requires special center pin bit (supplied) for screw removal
- M3 maintenance level option if anti-pick caulking is applied
- Lighthead, driver replaceable through the aperture of the fixture with quick-connections, no soldering required
- Backed by Kirlin's 25-Year Legacy Support Guarantee

Declare. Red List Approved *See Option RLA*
Made in the USA *BABAA Compliant*
IK10 Impact Resistant
Vandal Resistant
Natatorium *See Option -I66*
IP66 *See Option -I66*
BioGard™ *See Option -BG*
ISO 5/Class 100 *See Option -SH*
Quick Ship *See Option -QS*
UL Listed Wet, Damp, Dry
Maintenance Level M2

Available Maintenance Levels

Level	Option	Tools Required to Service LED Module and Driver
M2	Ligature & Vandal	• Phillips head screwdriver, and/or a basic wrench needed • Center pin hex bit (supplied) needed
M3	Optional field-applied caulk	• Phillips head screwdriver, and/or a basic wrench needed • Center pin hex bit (supplied) needed • Blade needed if anti-pick caulking applied

Available Source Options

See pages 2-4 for ordering configurations


SW — Static White 5 CCTs Available
TW — Tunable White
WD — Warm Dimming
RGBW — RGBW

Kirlin Lighting | 3401 E. Jefferson Ave., Detroit, MI 48207-4232, USA | P: 313.259.6400 | www.kirlinlighting.com


DUE TO CONTINUING PRODUCT IMPROVEMENTS, KIRLIN LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. VISIT WWW.KIRLINLIGHTING.COM FOR THE MOST CURRENT DATA.

KIRLIN
Lighting the Future Since 1895

Dimensions



Ceiling Cut-Out
6½" Dia.



Static White Options and Ordering Configuration

Red text = Quick Ship Eligible

(Example: LRC-06VND-3000L-120-RWF-MFL-30K-BG-FS)

Must Specify						Optional			
Model	**Lumens**	**Volts**	**Trim**	**Beam**	**CCT† & CRI**	**Driver Options**	**Emergency Options**	**Trim Options**	**Other Options**
LRC-06VND									
	Non-IC -7000L -6000L -5000L **Type IC** -4000L -3000L -2500L -2000L -1500L -1000L	-120 -277 -57DC	-RWF -RBN	-NFL -MFL -WFL	**80+ CRI*** **-27K:** 2700°K **-30K:** 3000°K **-35K:** 3500°K **-40K:** 4000°K **-50K:** 5000°K ***Note:** Lumen Factor = 0.93 for -27K **90+ CRI**** **-27K-HC:** 2700°K **-30K-HC:** 3000°K **-35K-HC:** 3500°K **-40K-HC:** 4000°K **-50K-HC:** 5000°K (N/A for -3000L) ****Note:** Lumen Factor = 0.79 for -27K-HC; All Others = 0.85 † For 2 SDCM, consult factory	**(Blank):** Standard 0-10V CCR 1.0% dim **-D2:** 0-10V 0.1% dim **-D3:** DALI 1.0% dim **-D3DC:** DC2DC DALI 1.0% dim; -4000L max; **must use -57DC voltage option** **-D4:** DALI 100-0.1% dim **-D4DC:** DC2DC DALI 0.1% dim; -4000L max; **must use -57DC voltage option** **-D5:** DMX512A 0.1% dim; -4000L max **-D6:** Triac/ELV dim; **120 volt only;** -4000L max **-ECO:** Lutron EcoSys; Dim-to-black; -4000L max **-REM:** Driver remote mounted in mini-cabinet; see remote driver ordering page for more details - MUST BE ORDERED SEPARATELY	**(Blank):** None **-EI:** Remote emergency inverter for 100% rated lumens up to -3000L; 90+ minutes; N/A for options -FS **-EI4:** Remote emergency inverter for 100% rated lumens up to -4000L; CEC Compliant; 90+ minutes; N/A for options -FS **-EI5:** Remote emergency inverter for 100% rated lumens up to -5000L; 90+ minutes; N/A for options -FS **-EM:** Internal emergency battery pack; Delivers 700 lumens; CEC Compliant; 90+ minutes **-ERH:** Remote emergency battery pack; Delivers 1000 lumens; CEC Compliant; 90+ minutes	**(Blank):** Standard trim finish; see photos above **Trim Finishes (-RWF Only)** **-35T:** Silver enamel trim **-37T:** Dark bronze enamel trim **-38T:** Black enamel trim **-BG:** BioGard™ anti-microbial white **-BKBG:** BioGard anti-microbial black **-94:** Custom color; consult factory **-94BG:** BioGard anti-microbial custom color finish **Other Trim Features** **-CF:** Custom color filter (Rosco); Specify **-I66:** IP66 rated trim and lens; Meets ASTM E283 restricted airflow of 2CFM; Natatorium rated **-WA:** White acrylic (flat) diffuser instead; with -WFL beam only	**(Blank):** None **Mounting** **-78:** Concrete pour housing with 2" collar **Other Options *** **-99:** Special modification; consult factory **-AWN:** Athena Wireless Node; N/A for Dimming Options D5, D6, ECO **-FS:** Fused primary; One per fixture; N/A for Options -EI, -EI4, -E15 **-QS:** Quick Ship; Options must be only red items; Quantities of 10-100 **-RLA:** Declare Red List Approved fixture **-SH:** Cleanroom rated ISO 5 Class 100 luminaire; Sealed housing, J-Box, trim assembly ***Note:** For other integrated control solutions, such as nLight, contact factory

Kirlin Lighting | 3401 E. Jefferson Ave., Detroit, MI 48207-4232, USA | P: 313.259.6400 | www.kirlinlighting.com

DUE TO CONTINUING PRODUCT IMPROVEMENTS, KIRLIN LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. VISIT WWW.KIRLINLIGHTING.COM FOR THE MOST CURRENT DATA.

KIRLIN
Lighting the Future Since 1895

Dynamic White Options and Ordering Configuration

(Example: LRC-06VND-1500L-UNV-RWF-MFL-3018-WD-BG-FS)

Must Specify						Optional			
Model	**Lumens**	**Volts**	**Trim**	**Beam**	**CCT & CRI**	**Driver Options**	**Emergency Options**	**Trim Options**	**Other Options**
LRC-06VND									
	Type IC **-2000L** **-1500L** **-1000L**	**-UNV** **-57DC**	**-RWF** **-RBN**	**-NFL** **-MFL** **-WFL**	**-6527:** 6500°K - 2700°K range, 90+ CRI **-4018:** 4000°K - 1800°K range, 90+ CRI **-3518:** 3500°K - 1800°K range, 90+ CRI **-3018:** 3000°K - 1800°K range, 90+ CRI **-2718:** 2700°K - 1800°K range, 90+ CRI	**-TW:** Dual 0-10V Tunable White control with 0.1% dimming **-TW7:** DALI dual drive 0.1% tunable white dimming driver instead **-TW7DC:** DC2DC DALI dual drive 0.1% tunable white dimming driver; **must use -57DC voltage option** **-TW8:** DALI DT8 dual drive 0.1% tunable white dimming driver instead **-TW8DC:** DC2DC DALI DT8 dual drive 0.1% tunable white dimming driver; **must use -57DC voltage option** **-WD:** Warm Dimming 0-10V control with 0.1% dimming; N/A for Option -6527 **-WD7:** DALI 0.1% warm dimming driver instead; N/A for Option -6527 **-WD7DC:** DC2DC DALI 0.1% warm dimming driver; N/A for Option -6527; **must use -57DC voltage option** **-REM:** Driver remote mounted in mini-cabinet; see remote driver ordering page for more details - MUST BE ORDERED SEPARATELY	**(Blank):** None **-EI:** Remote emergency inverter for 100% rated lumen output; 90+ minutes; N/A for options -FS **-EM:** Internal emergency battery pack; Delivers 700 lumens; CEC Compliant; 90+ minutes **-ERH:** Remote emergency battery pack; Delivers 1000 lumens; CEC Compliant; 90+ minutes	**(Blank):** Standard trim finish; see photos above **Trim Finishes (-RWF Only)** **-35T:** Silver enamel trim **-37T:** Dark bronze enamel trim **-38T:** Black enamel trim **-BG:** BioGard™ anti-microbial white **-BKBG:** BioGard anti-microbial black **-94:** Custom color; consult factory **-94BG:** BioGard anti-microbial custom color finish **Other Trim Features** **-I66:** IP66 rated trim and lens; Meets ASTM E283 restricted airflow of 2CFM; Natatorium rated **-WA:** White acrylic (flat) diffuser instead; with -WFL beam only	**(Blank):** None **Mounting** **-78:** Concrete pour housing with 2" collar **Other Options *** **-99:** Special modification; consult factory **-AWN:** Athena Wireless Node; N/A for Dimming Options TW, TW7 **-FS:** Fused primary; One per fixture; N/A for Option -EI **-RLA:** Declare Red List Approved fixture **-SH:** Cleanroom rated ISO 5 Class 100 luminaire; Sealed housing, J-Box, trim assembly ***Note:** For other integrated control solutions, such as nLight, contact factory

Kirlin Lighting | 3401 E. Jefferson Ave., Detroit, MI 48207-4232, USA | P: 313.259.6400 | www.kirlinlighting.com

DUE TO CONTINUING PRODUCT IMPROVEMENTS, KIRLIN LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. VISIT WWW.KIRLINLIGHTING.COM FOR THE MOST CURRENT DATA.

KIRLIN
Lighting the Future Since 1895

RGBW Options and Ordering Configuration

(Example: LRC-06VND-1000L-277-RWF-MFL-RGB4-DMX-BG)

Must Specify							Optional		
Model	**Lumens**	**Volts**	**Trim**	**Beam**	**CCT & CRI**	**Driver Options**	**Emergency Options**	**Trim Options**	**Other Options**
LRC-06VND									
	Non-IC **-1500L**	**-120** **-277**	**-RWF** **-RBN**	**-NFL** **-MFL** **-WFL**	**-RGB3:** RGB + 3000K 80+ CRI **-RGB4:** RGB + 4000K 80+ CRI	**-DMX:** DMX512A 0.1% dim	**(Blank):** None	**(Blank):** Standard trim finish; see photos above **Trim Finishes (-RWF Only)** **-35T:** Silver enamel trim **-37T:** Dark bronze enamel trim **-38T:** Black enamel trim **-BG:** BioGard™ anti-microbial white **-BKBG:** BioGard anti-microbial black **-94:** Custom color; consult factory **-94BG:** BioGard anti-microbial custom color finish **Other Trim Features** -**I66:** IP66 rated trim and lens; Meets ASTM E283 restricted airflow of 2CFM; Natatorium rated **-WA:** White acrylic (flat) diffuser instead; with -WFL beam only	**(Blank):** None **Mounting** **-78:** Concrete pour housing with 2" collar **Other Options** **-99:** Special modification; consult factory -**SH:** Cleanroom rated ISO 5 Class 100 luminaire; Sealed housing, J-Box, trim assembly

Please note: UL reference number for RGBW source is MRV-06859. All RGBW fixtures will be tagged with this ID.

Kirlin Lighting | 3401 E. Jefferson Ave., Detroit, MI 48207-4232, USA | P: 313.259.6400 | www.kirlinlighting.com

DUE TO CONTINUING PRODUCT IMPROVEMENTS, KIRLIN LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. VISIT WWW.KIRLINLIGHTING.COM FOR THE MOST CURRENT DATA.

KIRLIN
Lighting the Future Since 1895

Performance Factors - Static White

NOMINAL LUMENS	LUMEN FACTOR	NOMINAL WATTS	LPW FACTOR
-7000L	1.00	79.1	1.00
-6000L	0.89	69.1	1.02
-5000L	0.73	54.4	1.06
-4000L	0.54	36.7	1.17
-3000L	0.41	27.5	1.16
-2500L	0.36	24.7	1.15
-2000L	0.31	20.3	1.20
-1500L	0.23	14.4	1.24
-1000L	0.17	10.7	1.22

** See notes on page 2 for additional info on Lumen Factors*

Performance Factors - Tunable White

Lumen factors are based on comparable Static White light output.

NOMINAL LUMENS	6500K LUMEN FACTOR	2700K LUMEN FACTOR	NOMINAL WATTS
-2000L	0.65	0.52	20.8
-1500L	0.65	0.52	14.9
-1000L	0.65	0.52	11.4

Photometry - Static White - Installed Complete Fixture

LM-79 IES Certified Photometry from Independent Lab

Photometry from I.T.L., Boulder, CO




-7000L-RWF-NFL

Lumens: 6268
LPW: 79
Beam: ~24°
SC: 0.40
ITL Test: 94105

Cone of Light▲

Dist.	FC	Dia.
6	584.3	2.4
8	328.6	3.2
10	210.3	4.0
12	146.1	4.8
14	107.3	5.6
16	82.2	6.4



Nominal Lumens	Actual Lumens	Actual LPW
7000L	6268	79.2
6000L	5591	80.9
5000L	4588	84.3
4000L	3404	92.7
3000L	2570	93.5
2500L	2256	91.3
2000L	1943	95.7
1500L	1442	100.1
1000L	1066	99.6




-7000L-RWF-MFL

Lumens: 6492
LPW: 82
Beam: ~48°
SC: 0.75
ITL Test: 94107

Cone of Light▲

Dist.	FC	Dia.
6	261.3	4.5
8	147.0	6.1
10	94.1	7.6
12	65.3	9.1
14	48.0	10.6
16	36.7	12.1



Nominal Lumens	Actual Lumens	Actual LPW
7000L	6492	82.1
6000L	5791	83.8
5000L	4752	87.4
4000L	3525	96.1
3000L	2662	96.8
2500L	2337	94.6
2000L	2013	99.1
1500L	1493	103.7
1000L	1104	103.1




-7000L-RWF-WFL

Lumens: 6879
LPW: 87
Beam: ~59°
SC: 0.88
ITL Test: 94108

Cone of Light▲

Dist.	FC	Dia.
6	198.6	5.5
8	111.7	7.4
10	71.5	9.2
12	49.7	11.1
14	36.5	12.9
16	27.9	14.8



Nominal Lumens	Actual Lumens	Actual LPW
7000L	6879	87.0
6000L	6136	88.8
5000L	5035	92.6
4000L	3735	101.8
3000L	2820	102.6
2500L	2476	100.3
2000L	2132	105.0
1500L	1582	109.9
1000L	1169	109.3

LED manufacturers maintain a tolerance of +/-7% on flux (lumens) and power (electrical) measurements.

See Next Page for RGBW Photometry

▲ Cone of Light Key
Dia. (in ft.) shown is where FC value is half the FC at nadir.

Dist. Distance (Ft.) from fixture
FC Footcandles at nadir (0°)
Dia. Circle of light at 50% of FC

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTIED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR FIVE YEARS FROM DATE OF PURCHASE, INSTALLED TO N.E.C., IN NORMAL USE. Manufacturer at his option will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the offices of manufacturer within five years of original shipment. Liability of manufacturer is limited to the foregoing, and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.




DUE TO CONTINUING PRODUCT IMPROVEMENTS, KIRLIN LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. VISIT WWW.KIRLINLIGHTING.COM FOR THE MOST CURRENT DATA.

KIRLIN HEALTHCARE LIGHTING

Photometry - RGBW - Installed Complete Fixture

LM-79 IES Certified Photometry from Independent Lab

Photometry from L.L.I., Allentown, PA

All-On System Wattage: 26.4		Red LED	Green LED	Blue LED	White LED 4000K (RGB4)
 NFL (15°)	Lumens	88	254	37	1323
	Wattage	2.4	2.8	3.4	22.4
	LPW	36.7	90.7	10.9	59.1
	LLIA Test	Kirlin In-House Test	Kirlin In-House Test	Kirlin In-House Test	003025-004
 MFL (40°)	Lumens	86	248	36	1292
	Wattage	2.5	2.9	3.4	22.6
	LPW	34.4	85.5	10.6	57.2
	LLIA Test	003025-001	003025-002	003025-003	003025-005
 WFL (60°)	Lumens	82	236	34	1230
	Wattage	2.5	2.9	3.4	22.6
	LPW	32.8	81.4	10	54.4
	LLIA Test	Kirlin In-House Test	Kirlin In-House Test	Kirlin In-House Test	003025-006

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTIED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR FIVE YEARS FROM DATE OF PURCHASE, INSTALLED TO N.E.C., IN NORMAL USE. Manufacturer at his option will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the offices of manufacturer within five years of original shipment. Liability of manufacturer is limited to the foregoing, and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.

DUE TO CONTINUING PRODUCT IMPROVEMENTS, KIRLIN LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. VISIT WWW.KIRLINLIGHTING.COM FOR THE MOST CURRENT DATA.

KIRLIN
Lighting the Future Since 1895


Static White Remote Mini-Cabinet Options and Ordering Configuration

(Example: REM-SWCAB-0250A-277-2-D2-EMI)

Must Specify					Optional
Model	**Driver Current**	**Volts**	**Driver Count**	**Dimming**	**Other Options**
REM-SWCAB					
	50 Watt Drivers **-0250A:** 0250mA 50W driver; powers up to (2) 1000L fixtures **-0350A:** 0350mA 50W driver; powers up to (2) 1500L fixtures **-0500A:** 0500mA 50W driver; powers up to (2) 2000L fixtures **-0600A:** 0600mA 50W driver; powers up to (2) 2500L fixtures **-0700A:** 700mA 50W driver; powers up to (2) 3000L fixtures **-1000A:** 1000mA 50W driver; powers (1) 4000L fixture **-1400A:** 1000mA 50W driver; powers (1) 5000L fixture **75 Watt Drivers** **-1000B:** 1000mA 75W driver; powers up to (2) 4000L fixtures **-1750B:** 1750mA 75W driver; powers (1) 6000L fixture **-2000B:** 1750mA 75W driver; powers (1) 7000L fixture	**-120** **-277**	**-1:** 1 driver **-2:** 2 drivers	**-D1:** 0-10V 1.0% dim **-D2:** 0-10V 0.1% dim **-D3:** DALI 1.0% dim **-D4:** DALI 100-0.1% dim **-D5:** DMX512A 0.1% dimming; only available with -XXXXA driver options	**(Blank):** None **-EI5:** Remote emergency micro-inverter: 50W max load; 90+ minutes run time **-EMI:** Remote emergency mini-inverter: 125W max load; 90+ minutes run time


Lumens	Remote Mini-Cabinet	Driver Wattage	Maximum Capacity	
			1 Driver in -REM Cabinet	2 Drivers in -REM Cabinet
-1000L	REM-SWCAB-0250A	50W	Qty 2: 1000L Luminaires	Qty 4: 1000L Luminaires, (2 per driver)
-1500L	REM-SWCAB-0350A	50W	Qty 2: 1500L Luminaires	Qty 4: 1500L Luminaires, (2 per driver)
-2000L	REM-SWCAB-0500A	50W	Qty 2: 2000L Luminaires	Qty 4: 2000L Luminaires, (2 per driver)
-2500L	REM-SWCAB-0600A	50W	Qty 2: 2500L Luminaires	Qty 4: 2500L Luminaires, (2 per driver)
-3000L	REM-SWCAB-0700A	50W	Qty 2: 3000L Luminaires	Qty 4: 3000L Luminaires, (2 per driver)
-4000L	REM-SWCAB-1000B	75W	Qty 2: 4000L Luminaires	Qty 4: 4000L Luminaires, (2 per driver)
-5000L	REM-SWCAB-1400A	50W	Qty 1: 5000L Luminaire	Qty 2: 5000L Luminaires
-6000L	REM-SWCAB-1750B	75W	Qty 1: 6000L Luminaire	N/A
-7000L	REM-SWCAB-2000B	75W	Qty 1: 7000L Luminaire	N/A

Dimensions

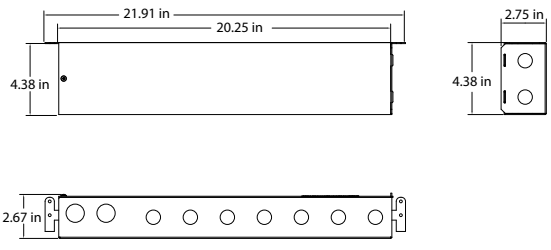

50W and 75W Drivers

Exact dimensions of drivers inside the box may vary based on options chosen.



-REM Features

- Remote mini-cabinets are plenum rated and can be mounted to the ceiling grid
- Low-voltage cabling from driver to fixture(s)
- 1/2" and 3/4" knockouts

See next page for Dynamic White and Warm Dimming Remote Mini-Cabinet Options and Ordering Configuration

DUE TO CONTINUING PRODUCT IMPROVEMENTS, KIRLIN LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. VISIT WWW.KIRLINLIGHTING.COM FOR THE MOST CURRENT DATA.

CHOICE SERIES
October 2026

KIRLIN
Lighting the Future Since 1895


Dynamic White Remote Mini-Cabinet Options and Ordering Configuration

(Example: REM-DWCAB-0250A-2-4018-TW8-EMI)

Must Specify					Optional
Model	**Driver Current**	**Driver Count**	**CCT**	**Dimming**	**Other Options**
REM-DWCAB					
	50 Watt Drivers **-0250A:** 0250mA 50W driver; powers (1) 1000L fixture **-0350A:** 0350mA 50W driver; powers (1) 1500L fixture **-0500A:** 0500mA 50W driver; powers (1) 2000L fixture	**-1:** 1 driver **-2:** 2 drivers	**-6527:** 6500°K - 2700°K range, 90+ CRI **-4018:** 4000°K - 1800°K range, 90+ CRI **-3518:** 3500°K - 1800°K range, 90+ CRI **-3018:** 2700°K - 1800°K range, 90+ CRI	**-TW:** Dual 0-10V Tunable White control with 0.1% dimming **-TW7:** DALI dual drive 0.1% tunable white dimming driver instead **-TW8:** DALI DT8 dual drive 0.1% tunable white dimming driver instead **-WD:** Warm Dimming 0-10V control with 0.1% dimming; N/A for Option -6527 **-WD7:** DALI 0.1% warm dimming driver instead; N/A for Option -6527	**(Blank):** None **-EI5:** Remote emergency micro-inverter: 50W max load; 90+ minutes run time **-EMI:** Remote emergency mini-inverter: 125W max load; 90+ minutes run time


Lumens	Remote Mini-Cabinet	Driver Wattage	Maximum Capacity	
			1 Driver in -REM Cabinet	2 Drivers in -REM Cabinet
-1000L	REM-DWCAB-0250A	50W	Qty 1: 1000L Luminaire	Qty 2: 1000L Luminaires
-1500L	REM-DWCAB-0350A	50W	Qty 1: 1500L Luminaire	Qty 2: 1500L Luminaires, wired in series
-2000L	REM-DWCAB-0500A	50W	Qty 1: 2000L Luminaire	Qty 2: 2000L Luminaires, wired in series

Dimensions

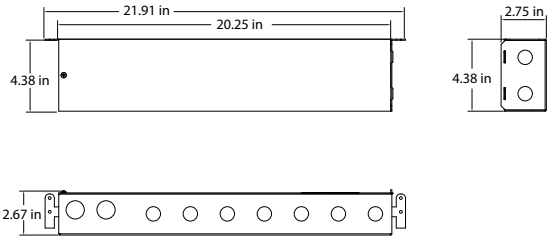

50W and 75W Drivers

Exact dimensions of drivers inside the box may vary based on options chosen.



-REM Features

- Remote mini-cabinets are plenum rated and can be mounted to the ceiling grid
- Low-voltage cabling from driver to fixture(s)
- 1/2" and 3/4" knockouts

See next page for RGBW Remote Mini-Cabinet Options and Ordering Configuration

DUE TO CONTINUING PRODUCT IMPROVEMENTS, KIRLIN LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. VISIT WWW.KIRLINLIGHTING.COM FOR THE MOST CURRENT DATA.

CHOICE SERIES
October 2026


RGBW Remote Mini-Cabinet Options and Ordering Configuration

(Example: REM-RGBWH-1400A-2-EMI)

Must Specify			Optional
Model	**Driver Current**	**Driver Count**	**Other Options**
REM-RGBWH			
	50 Watt Drivers **-1400A:** 1400mA driver powers (1) 1500L	**-1:** 1 driver **-2:** 2 drivers	**(Blank):** None **-EI5:** Remote emergency micro-inverter: 50W max load; 90+ minutes run time **-EMI:** Remote emergency mini-inverter: 125W max load; 90+ minutes run time


Lumens	Remote Mini-Cabinet	Driver Wattage	Maximum Capacity	
			1 Driver in -REM Cabinet	2 Drivers in -REM Cabinet
-1500L	REM-RGBWH-1400A	50W	Qty 1: 1500L Luminaire	Qty 2: 1500L Luminaires

Dimensions

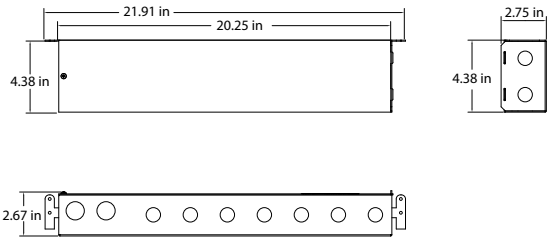

50W and 75W Drivers

Exact dimensions of drivers inside the box may vary based on options chosen.



-REM Features

- Remote mini-cabinets are plenum rated and can be mounted to the ceiling grid
- Low-voltage cabling from driver to fixture(s)
- 1/2" and 3/4" knockouts

DUE TO CONTINUING PRODUCT IMPROVEMENTS, KIRLIN LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. VISIT WWW.KIRLINLIGHTING.COM FOR THE MOST CURRENT DATA.