

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

Emergency Backup System

EMI-03120


125 Watt Emergency Inverter • Used with SmartLED™ MRI System & Symphony™ System

- Operates up to 3 SmartLED™ MRI Driver Modules (DVR Series - mounted in **MRI-CABNT**), up to 3 Symphony 0-10V Driver Modules (DVR Series - mounted in **SYM-CABNT**), up to 3 Symphony DMX Power Supply Channels (**SYM-DMXPS**), or 125 watts
- 120/277 volt input, 60 Hz
- Less than 0.05 second transfer time
- Operating temperature range: 20° to 30°C (68° to 86°F)
- Up to 1000 feet remote distance from load
- High efficiency pure sine wave inverter
- UL 924 Listed. Meets or exceeds all NEC and Life Safety Code Emergency Lighting Requirements
- Includes momentary test switch, yellow ready indicator light, green inverter-on indicator, and red charging indicator
- For detailed instruction manual [click here](#)



For MRI Installations, use of both SmartLED™ Driver Modules and Filters is REQUIRED or Kirlin warranty is null and void.

Dimensions and Weight

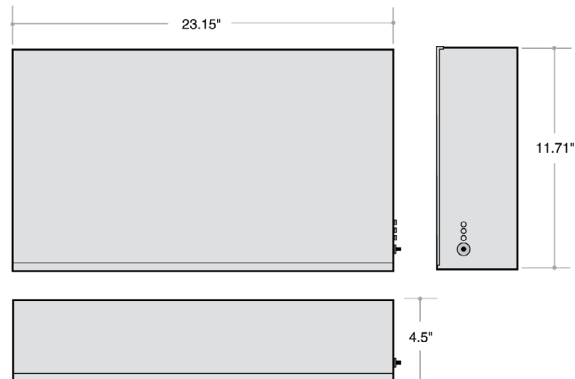

46.0 lbs.

Wiring Connections

