

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

Emergency Backup System

EMI-21220


375 Watt Emergency Inverter • Used with SmartLED™ MRI System & Symphony™ System

- Operates up to (8) 50W (DVR-XXXXA) DVR modules, (5) 75W (DVR-XXXXB) DVR modules, or 375 watts at 100% light output for a maximum of 90 minutes for SmartLED™ MRI Driver Cabinet (**MRI-CABNT**), Symphony 0-10V Driver Cabinet (**SYM-CABNT**), or Symphony DMX Power Supply (**SYM-DMXPS**)
- 120/277 volt input, 60 Hz
- Less than 0.05 second transfer time
- Operating temperature range: 20° to 30°C (68° to 86°F)
- Up to 1000 feet remote distance from load
- High efficiency pure sine wave inverter
- UL 924 Listed. Meets or exceeds all NEC and Life Safety Code Emergency Lighting Requirements
- Includes momentary test switch, yellow ready indicator light, green inverter-on indicator, and red charging indicator
- For detailed instruction manual [click here](#)



For MRI Installations, use of both SmartLED™ Driver Modules and Filters is REQUIRED or Kirlin warranty is null and void.

Dimensions and Weight

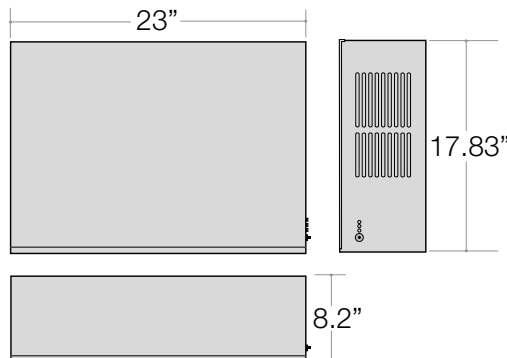

114 lbs.

Wiring Connections

