

CATALOG #	TYPE
JOB NAME	WATTAGE VOLTAGE

7" x 10" 1 Quad 13 WATT MAXIMUM

FNT-07122

Quad 13 NightLight

Features

Lamp

- Designed for one 4-pin quad compact fluorescent lamp: 13W quad

Ballast: Multi-Voltage

- Installed electronic high power factor, thermally protected. For 9V twin see Option -43.
- 120-277 multi-volt; 50/60 Hz. THD < 10%
- ClickQuick connectors for easy service
- Cold weather -22°F (-30°C).
- End of lamp life protection circuit. RFI filter.
- Internally fused. Also see Option -FS.

Reflector

- Full size white 80% (min.) reflectivity.

Lens

- .220" clear polycarbonate behind louver.

Trim Assembly



- Attractively beveled and gasketed cast aluminum frame pulls tight to wall.
- Die-formed and covered aluminum door bolts tightly to frame with two flush mounted screws.
- Gasketing between door and frame.
- White finish standard. Optional colors.

THIS PRODUCT IS NO LONGER AVAILABLE

Please consult

QUOTATIONS



for the best alternative.

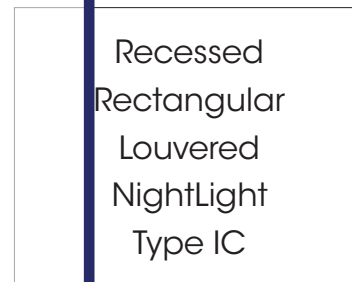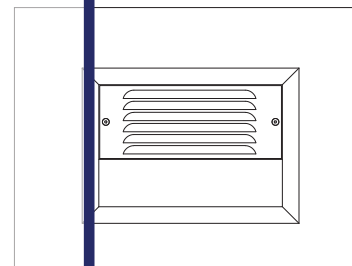


Selected Options:

- Acrylic Lens Option -17
- On-Off Switch Option -34
- GFCI Option -GF


Performance at a Glance

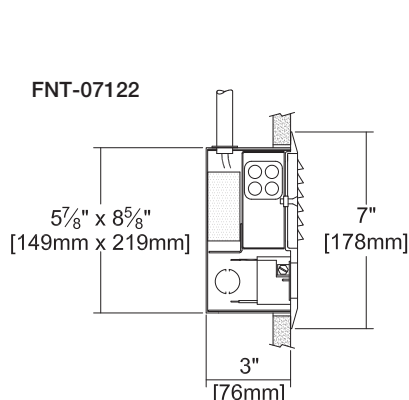

Standard View

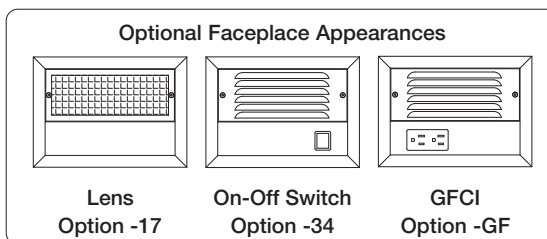

FNT-07122 (1 Quad 13W)



THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

RENAISSANCE SERIES COMPACT FLUORESCENT LIGHTING

MAXIMUM WATTAGE

1 Quad 13

CATALOG NUMBER

FNT-07122

DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

Options

Wattage and Voltage

- 43 Lower wattage: for 4-pin 9W twin.
- 97 Specify other voltage. Consult factory.
- 98 347 volt, 50/60 Hz. input. Consult factory.
- 120 120V (50-60Hz) input. Required for Options
- 34, -GF or -HD.

Lenses and Trims

- 17 Prismatic high strength acrylic lens with door instead of louvers.
- 26 Tamper-resistant flush mounted door screws and key.
- 34 With hospital grade push button on-off switch. Indoor use. Rated 120V only. Must add Option -120.
- GF With duplex hospital grade GFCI installed. Indoor use. Rated 120V only. Must add Option -120.
- HD With duplex hospital grade receptacle installed. Indoor use. Rated 120V only. Must add Option -120.

Luminaire (Faceplate) Finishes

- 35 Natural aluminum acrylic enamel.
-37 Dark Bronze acrylic enamel.
-38 Black acrylic enamel.
-94 Custom color/finish. Specify. Consult factory.

Other

- 99 Special modification. Consult factory.
- FS Additional in-line fuse. Not available with Option -98 (347V).
- LE With 4-pin electronic lamp. 3500°K standard. 82 CRI and 12,000 hour life. Specify wattage, style and color temperature.

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE, INSTALLED TO N.E.C., IN NORMAL USE. Manufacturer at his option will replace or repair such fixture or refund the purchase price or presentation of proof of purchase and defective fixture at the offices of manufacturer within three years of original shipment. Liability of manufacturer is limited to the foregoing, and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. In normal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME

TYPE

WATTAGE

CATALOG NUMBER

VOLTAGE