

Recessed Lensed T-6 Bi-Pin
Parabolic Downlight
39 to 150 Watt

Multiple Beam Spread Available

Features

Lamp

- Designed for vertical T-6 bi-pin metal halide lamps. See chart below for standard and optional wattages.
- See Option -43 and chart below for lower wattage.

Socket

- Vertical. G12 bi-pin. Pulse rated.
- Porcelain body. Silicone leads.

Reflectors

- Upper: Ellipsoidal or parabolic specular Alzak® aluminum.
- Lower cross baffle: Self-flanged specular Alzak aluminum with 4 center parabolic cross-baffle.

Lens

- UV absorbing lens. Micro-glass mounted to upper reflector. Also see Options.

THIS PRODUCT IS NO LONGER AVAILABLE

PLEASE CONSULT

QUOTATIONS

for the best alternative.

HRR-07055

- Entire luminaire serviced from below through removable reflectors.
- Built-in plaster frame.

Outlet Box

- Prewired 14 GA (NEC) galvanized steel, UL listed; with removable insulated cover.
- 1/2" and 3/4" knockouts.

Installation

- 27" galvanized hanger bars supplied (2).
- Fully adjustable universal mounting brackets supplied (2).
- Recesses indoor or outdoor in covered locations.

UL, C-UL (Canada) Listings

- Wet, damp or dry locations, covered ceilings.
- Through-branch circuit conductors (6 #12).
- **Three Year Limited Warranty**
- Includes standard fixture, including ballast.
- Per current NEC

Wattage Availability and Cut-Out Dimensions

| Catalog No. | Lamp/Base | Standard Wattage Pulse MH | Option -43: Lower Wattage Pulse MH | Max. Standby Wattage (-49-65-66) | Ceiling Cut-Out Diameter | Optical Style |
|-------------|----------------|---------------------------|------------------------------------|----------------------------------|--------------------------|---------------|
| HRR-07055 | T-6/G12 bi-pin | 150 | 39-70 | 100 | 8.0" | Parabolic |

Options

Ballasts

- 39 Electronic dimming ballast instead, for pulse start metal halide. Consult factory for wattage and voltage availability.
- 96 Regulating electronic MH ballast instead.

Wattage and Voltage

- 43 Lower wattage: See Option -43 chart above for available lower wattages. Specify voltage.

- 120 120 volt, 60 Hz. ballast.
- 277 277 volt, 60 Hz. ballast.
- 347 347 volt, 60 Hz. ballast. Consult factory for dimming or electronic.
- 97 Other voltage ballast instead. Consult factory.

Relays, Standbys, Lamps (See Chart)

- 49 Extra circuit DCB socket. Do not energize simultaneously with main source. Also see -LS.
- 65 Electronic standby system and DCB socket. Following HID outage, provides immediate light until HID restrikes. Also see -66 and -LS.
- 66 Electronic time delay standby system and DCB socket. Following outage, provides light until HID reaches 70% output. Also see Option -LS.

- LP With lamp. Specify wattage and color temperature. (3000°K standard for T-6 MH)
- LS With T-4 DCB tungsten halogen standby lamp. Use only with Options -49, -65 or -66.

Reflectors and Trims (Self-Flanged) (Consult factory)

- 16 Champagne Gold specular Alzak lower cone. (CP x .95)
- 30 All White lower cone or cross baffle.
- 31 White flange (only) on lower cone or cross baffle. (CP x .95)
- 32 Trim extender. Broadens trim flange O.D. by 1" to cover larger ceiling opening.
- 45 Gasket above reflector flange. Stops dust streaks on ceiling.
- 63 Dune specular Alzak lower cone. (CP x .93)
- 69 Wheat specular Alzak lower cone. (CP x .92)
- 70 SofTex Clear etched lower cone. (CP x .92)
- 71 SofTex Dune etched lower cone. (CP x .89)
- 72 Black specular Alzak lower cone. (CP x .77)
- 77 SofTex Pewter etched lower cone. (CP x .85)
- 90 SofTex Champagne Gold etched lower cone. (CP x .90)

- 91 SofTex Wheat etched lower cone. (CP x .88)
- 92 Umber specular Alzak lower cone. (CP x .83)
- 93 Pewter specular Alzak lower cone. (CP x .88)
- 94 Custom color reflector or cross baffle. Consult factory.
- WWW Wall wash cross baffle reflector assembly instead.

Lenses

- 15 Prismatic C#73 flat glass lens instead.
- 28 UV absorbing clear tempered glass instead.

Mounting Options


- 79 Extension collar for up to 2" thick ceilings.
- 82 Sloped ceiling adapter, with mounting hardware. Specify 5° increments up to 30°.
- 85 Ceiling Panel; with recessed fixture hole. Lays-in 2' x 2' grid. White.

Other Options

- 99 Special modification. Consult factory.
- TA Top access; for servicing from above ceiling.

HRR-07055

Plan View







Cone of Light Key

- Ft.** Distance from fixture
 - FC** Footcandles (average)
 - Dia.** Circle of light at 50% of FC
- * Dia. (in ft.) shown is where FC value is half the FC at nadir.

C.U. (Coefficients of Utilization) Tables are available on request. Please contact your Kirlin representative.

HRR-07055 150W

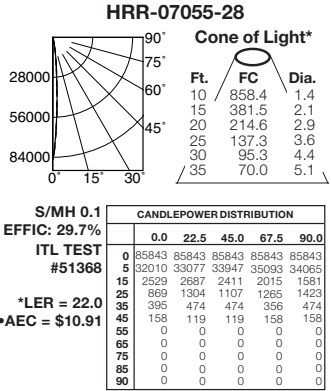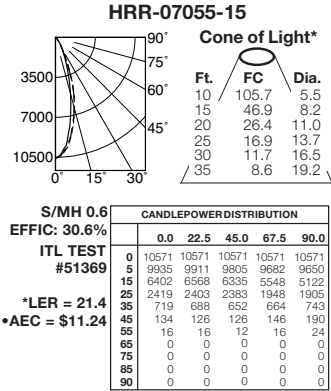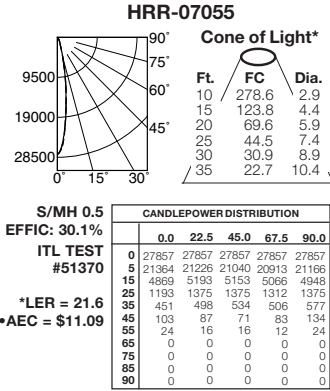

LIMITED WARRANTY - CATALOGUED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALLED TO N.E.C. IN NORMAL USE. Manufacturer at the option will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and evidence of failure at the office of manufacturer within three years of original shipment. Liability of manufacturer is limited to the foregoing, and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchase of any person. This warranty is applied to the buyer in placed of the manufacturer's expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.

* LER (Luminaire Efficacy Rating) = $\frac{\text{Luminaire Effic.} \times \text{Total Lamp Lumens} \times \text{Ballast Factor}}{\text{Input Watts}}$

• AEC = Annual Energy Cost per 1000 lumens (based on 3000 hours use @ \$0.08 KWH).

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME

TYPE

WATTAGE

VOLTAGE

CATALOG NUMBER