

Recessed Open Appearance
Lensed E-Lamp Pulse Start
Downlights: 150 to 400 Watt

8" 250W HRR-08027
11" 400W HRR-11029

THIS PRODUCT IS NO LONGER

AVAILABLE

Please consult QUOTATIONS for the best alternative.

Features

Lamp

- Designed for metal halide E-lamps. See chart below for standard and optional wattages.
- See Option -43 and chart below for lower wattage or HPS availability.

Socket

- Vertical. Pulse rated. Glazed porcelain.
- Nickel-plated brass screw shell. Silicone leads.

Reflector

- Self-flanged clear specular Alzak® finish.
- Ten optional reflector finishes available.

Lens

- UV absorbing clear tempered glass mounted to reflector. Also see Options.

Ballast Assembly: WhisperPac™

- WhisperPac™ fully encapsulated 180°C rated HPF pulse start ballast.

- 10 watt, Class H, high frequency for 120 volt.
- Options -65, -66, -HL; Class H, linear reactor for 277 volt.
- Options -65, -66, -HL; Class H, linear reactor for 277 volt.
- Capacitor and ignitor supplied.
- Dimming (-39) and electronic (-96) ballasts available. See Options.

- Capacitor and ignitor supplied.
- Dimming (-39) and electronic (-96) ballasts available. See Options.

- Acrylic enameled aluminum.
- Cool: Dissipates heat across entire surface.
- Refract: Exceeds 9000 lumens/STB output.

- Acrylic enameled aluminum.
- Cool: Dissipates heat across entire surface.
- Refract: Exceeds 9000 lumens/STB output.

- Acrylic enameled aluminum.
- Cool: Dissipates heat across entire surface.
- Refract: Exceeds 9000 lumens/STB output.

- Acrylic enameled aluminum.
- Cool: Dissipates heat across entire surface.
- Refract: Exceeds 9000 lumens/STB output.

- Acrylic enameled aluminum.
- Cool: Dissipates heat across entire surface.
- Refract: Exceeds 9000 lumens/STB output.

- Entire luminaire serviced from below through removable reflector and lens.
- Built-in plastic frame.

Outlet Box

- Prewired 14 GA (NEC) galvanized steel, UL listed; with removable insulated cover.
- 1/2" and 3/4" knockouts.

Installation

- 27" galvanized hanger bars supplied (2).
- Fully adjustable universal mounting brackets supplied (2).
- Recesses indoor or outdoor in covered locations.

UL, C-UL (Canada) Listings

- Wet, damp or dry locations, covered ceilings.
- Through-branch circuit conductors (6 #12).

Three Year Limited Warranty

- Complete standard fixture, including ballast.

Technical Protection

- Per current NEC.

Wattage Availability and Cut-Out Dimensions

Catalog No.	Lamp/Base	Standard Wattage		Option -43: Lower Wattage		Max. Standby Wattage (-49-65-66-LS)	Ceiling Cut-Out Diameter
		Pulse MH	-24 (HPS)	Pulse MH	-24 (HPS)		
HRR-08027	ED-28/Mog	250	250	150-200	150	150	9.0"
HRR-11029	ED-28/Mog	400	250	150-350	150	150	12.25"

Options

Sources and Ballasts

- 24 HPS ballast instead. See wattage chart above for available wattages. Specify voltage.
- 39 Electronic dimming ballast instead, for pulse start metal halide. Consult factory for wattage and voltage availability.
- 96 Regulating electronic MH ballast instead. Consult factory for availability in 175W or above.

Wattage and Voltage

- 43 Lower wattage: See Option -43 chart above for available lower wattages. Specify voltage.
- 120 120 volt, 60 Hz. ballast.
- 277 277 volt, 60 Hz. ballast.
- 347 347 volt, 60 Hz. ballast. Consult factory for dimming or electronic.
- 97 Other voltage ballast instead. Consult factory.

Relays, Standbys, Lamps (See Chart)

- 49 Extra circuit DCB socket. Do not energize simultaneously with main source. Also see -LS.
- 65 Electronic standby system and DCB socket. Following HID outage, provides immediate light

- until HID restriking. Also see -66 and -LS.
- 66 Electronic time delay standby system and DCB socket. Following outage, provides light until HID reaches 70% output. Also see Option -LS.
- HL Hi-Lo wiring modification for use with external relay systems (by others). 175 watt or above. CWA ballast only. Specify system.
- LP With lamp. Specify source, wattage, color temperature, and clear or coated. (3700°K standard for metal halide) Consult factory for other color temperatures.
- LS With T-4 DCB tungsten halogen standby lamp. Use only with Options -49, -65 or -66.

Reflectors and Trims (Self-Flanged)

- 16 Champagne Gold specular Alzak reflector. (CP x .93)
- 31 White flange (only) on self-flanged reflector.
- 32 Trim extender. Broadens trim flange O.D. by 1" to cover larger ceiling opening.
- 45 Gasket above reflector flange. Stops dust streaks on ceiling.
- 63 Dune specular Alzak reflector. (CP x .90)
- 69 Wheat specular Alzak reflector. (CP x .88)
- 70 SoftTex Clear softly etched reflector. (CP x .90)

- 71 SoftTex Dune softly etched reflector. (CP x .81)
- 77 SoftTex Pewter softly etched reflector. (CP x .78)
- 90 SoftTex Champagne Gold softly etched reflector. (CP x .84)
- 91 SoftTex Wheat softly etched reflector. (CP x .80)
- 93 Pewter specular Alzak reflector. (CP x .85)
- 94 Custom color reflector. Consult factory.

Lenses

- 15 Prismatic flat C#73 glass instead.
- ML UV absorbing tempered Microlux glass instead. Concentrates distribution.

Mounting Options

- 79 Extension collar for up to 2" thick ceilings.
- 82 Sloped ceiling adapter, with mounting hardware. Specify 5° increments up to 30°. Not available for HRR-11029.
- 85 Ceiling Panel; with recessed fixture hole. Lays-in 2' x 2' grid. White.

Other Options

- 99 Special modification. Consult factory.


KIRLIN

THE KIRLIN COMPANY


3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232

(313) 259-6400 • Fax: (313) 259-9409 or (313) 259-3121 • www.kirlinlighting.com

HRR-08027 HRR-11029



Plan View A




Plan View B


Cone of Light Key
Ft. Distance from fixture
FC Footcandles (average)
Dia. Circle of light at 50% of FC
 * Dia. (in ft.) shown is where FC value is half the FC at nadir.

C.U. (Coefficients of Utilization)
 Tables are available on request.
 Please contact your Kirlin representative.

HRR-08027 250W (Plan View A)



HRR-08027 (Coated Lamp)




CANDLEPOWER DISTRIBUTION					
	0.0	22.5	45.0	67.5	90.0
0	9301	9301	9301	9301	9301
5	9205	9205	9205	9205	9205
15	9383	9383	9383	9383	9383
25	8646	8646	8646	8646	8646
35	5720	5720	5720	5720	5720
45	2927	2927	2927	2927	2927
55	860	860	860	860	860
65	183	183	183	183	183
75	15	15	15	15	15
85	2	2	2	2	2
90	0	0	0	0	0


ITL TEST
#51686

***LER = 46.1**
***AEC = \$5.20**

HRR-11029 400W (Plan View B)

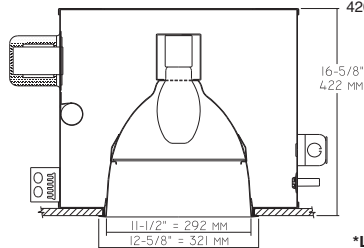


HRR-11029 (Coated Lamp)



CANDLEPOWER DISTRIBUTION					
	0.0	22.5	45.0	67.5	90.0
0	43611	43611	43611	43611	43611
5	37141	37141	37141	37141	37141
15	29062	29062	29062	29062	29062
25	18422	18422	18422	18422	18422
35	8150	8150	8150	8150	8150
45	1735	1735	1735	1735	1735
55	152	152	152	152	152
65	63	63	63	63	63
75	0	0	0	0	0
85	0	0	0	0	0
90	0	0	0	0	0

ITL TEST
#51688
***LER = 55.7**
***AEC = \$4.31**


HRR-11029-15 (Clear Lamp)



CANDLEPOWER DISTRIBUTION					
	0.0	22.5	45.0	67.5	90.0
0	45593	45593	45593	45593	45593
5	43085	43085	43085	43085	43085
15	32635	32635	32635	32635	32635
25	18159	18159	18159	18159	18159
35	6560	6560	6560	6560	6560
45	2589	2589	2589	2589	2589
55	1254	1254	1254	1254	1254
65	759	759	759	759	759
75	0	0	0	0	0
85	0	0	0	0	0
90	0	0	0	0	0

ITL TEST
#51700
***LER = 61.4**
***AEC = \$3.91**

HRR-11029-ML (Clear Lamp)



CANDLEPOWER DISTRIBUTION					
	0.0	22.5	45.0	67.5	90.0
0	100162	100162	100162	100162	100162
5	87550	87550	87550	87550	87550
15	41139	41139	41139	41139	41139
25	14488	14488	14488	14488	14488
35	4834	4834	4834	4834	4834
45	1311	1311	1311	1311	1311
55	472	472	472	472	472
65	196	196	196	196	196
75	0	0	0	0	0
85	0	0	0	0	0
90	0	0	0	0	0

ITL TEST
#51701
***LER = 63.5**
***AEC = \$3.78**

* LER (Luminaire Efficacy Rating) = Luminaire Effic. x Total Lamp Lumens x Ballast Factor
 Input Watts

* AEC = Annual Energy Cost per 1000 lumens
 (based on 3000 hours use @ \$0.08 KWH).

SUBMITTAL DATA

JOB NAME
 TYPE
 WATTAGE
 VOLTAGE
 CATALOG NUMBER

APPROVAL STAMP

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALL TO N.E.C. IN NORMAL USE. Manufacturer at the option will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the office of manufacturer within three years of original shipment. Liability of manufacturer is limited to the foregoing, and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchase or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.

PS MET HALIDE
 REV/APRIL 2009