


CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

5" LED LNR-05136

Round LED NightLight or MarkerLight

Mounts in Standard Octagon Outlet Box (Provided)

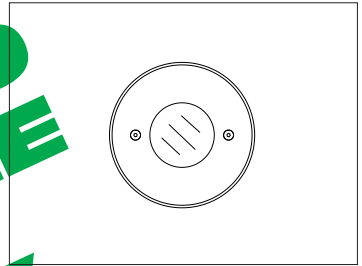

Features

LED

- White recessed module (colors optional).
- 4.4 watts - energy efficient, uniform, cool
- 108 lumens typical.

LED Power Supply

- 10 volt DC. Electronically stabilized.
- Minimum operating temperature -4°F (-20°C).
- 120 volt standard. Load insensitive.

Lens

- .125" translucent white acrylic lens in front of LED source.
- Gasketing between lens and faceplate provided.

Trim Assembly

- Gasketed aluminum frame pulls tight to wall.

- White finish standard. Optional colors.
- Tamper resistant available. See Options.

Housing: Shallow 2¼"

- 4" x 2¼" standard U. L. listed octagon galvanized steel outlet box.
- Frame removable for servicing.

Installation

- Recesses in wall indoor or outdoor, covered locations. Minimum operating temp. -4°F (-20°C).
- Mounting holes provided on top, bottom and ends.

UL, C-UL (Canada) Listings




- Damp or dry locations, covered ceilings.
- **Three Year Limited Warranty**
- Complete standard fixture.

Recessed Round
LED
NightLight /
Marker Light

Selected Optional Colors:

- Blue LED Option -BL
- Green LED Option -GN
- Red/Amber LED Option -RA
- Yellow LED Option -YE

Performance at a Glance

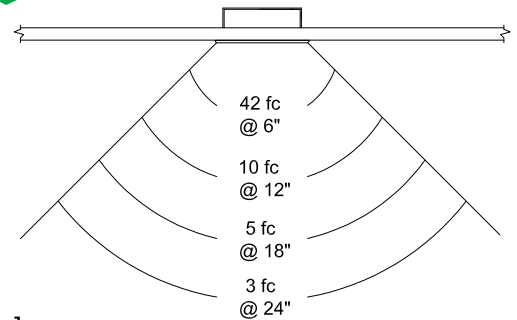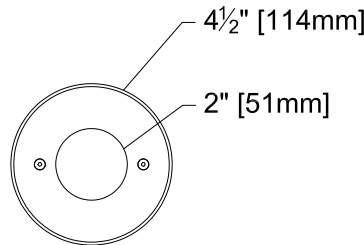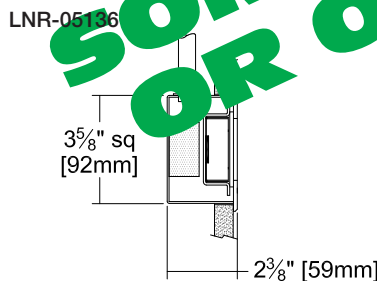

Footcandle Performance*
Installed Top View

* Based on 14" mounting height; measuring footcandles at the floor perpendicular to the lens.

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

RENAISSANCE SERIES
COMPACT FLUORESCENT LIGHTING

MAXIMUM WATTAGE

LED

CATALOG NUMBER

LNR-05136

DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

Options

LED Colors

- BL Blue LED module instead.
- GN Green LED module instead.
- RA Red/Amber LED module instead.
- YE Yellow LED module instead.

Trims

- 26 Tamper-proof flush mounted door screws.

Frame Finishes

- 35 Natural aluminum acrylic enamel.
- 36 Gold acrylic enamel.
- 37 Dark Bronze acrylic enamel.
- 38 Black acrylic enamel.
- 94 Custom color/finish. Specify. Consult factory.

Voltage / Battery Pack

- 75 Remote emergency battery pack. Consult factory.
- 87 Other voltage input. Consult factory.
- 98 347 volt, 50/60 Hz. input. Consult factory.

Other

- 99 Special modification. Consult factory.
- FF Fastener free faceplate / trim. No visible hardware.

THIS FIXTURE IS NO LONGER AVAILABLE PLEASE SPECIFY LNR-05136 INSTEAD SOME DESIGN FEATURES OR OPTIONS MAY HAVE CHANGED

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALLED TO N.E.C. IN NORMAL USE. Manufacturer at his option will replace or repair such fixture or refund the purchase price or presentation of proof of purchase and defective fixture at the offices of manufacturer within three years of original shipment. Liability of manufacturer is limited to the foregoing, and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Additional uses, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME

TYPE

WATTAGE

VOLTAGE

CATALOG NUMBER