

CATALOG #		TYPE
JOB NAME	WATTAGE	VOLTAGE


5"

LED

LNR-05138

"Half Round" LED NightLight or Marker Light

Mounts in Standard Octagon Outlet Box (Provided)



Features

I FD

- White recessed module (colors optional).
- 4.4 watts energy efficient, uniform, cool
- 108 lumens typical.

LED Power Supply

- 10 volt DC. Electronically stabilized.
- Minimum operating temperature -4°F (-20°C).
- 120 volt standard. Load insensitive

Lens

- .125" transfucent white acrylic lens in front of LED source.
- Gasketing between lens and faceplate provided.

Trim Assembly

Gasketed aluminum frame pulls tight to wall.

- White finish standard. Optional colors.
- Tamper resistant available. See Options.

Housing Shallow 21/4"

- 4" x 2¼" standard U. L. listed octagon galvanized steel outlet box
- Frame removable for servicing

Installation

- Recesses in wall indoor or outdoor, covered locations. Winimum operating temp 4°F (2000)
- Mounting holes provided on top, bottom and ends.

UL, C-UL (Canada) Listings

• Damp or dry locations, covered ceilings

Three Year Limited Warranty

Complete standard fixture.

Recessed "Half Round"

I FD.


NightLight,

Marker Light


Selected Optional Colors:

- Blue LED Option -BL
- Green LED Option -GN
- Red/Amber LED Option -RA
- Yellow LED Option -YE

Performance at a Glance

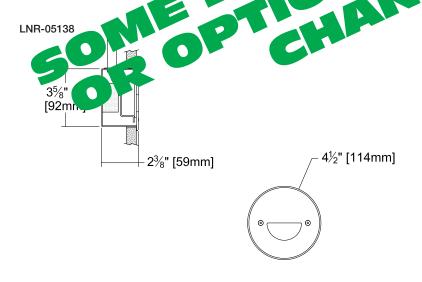

Footcandle Performance On the Floor - Top View (Installed 14" above finished floor)



* Based on 14" mounting height; measuring footcandles at the floor perpendicular to the lens.

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232 (313) 259-6400 • Fax: (313) 259-9409 or (313) 259-3121 • www.kirlinlighting.com

MAXIMUM WATTAGE

CATALOG NUMBER

LED

LNR-05138

RENAISSANCE SERIES



Options

LED Colors

- -BL Blue LED module instead.
- -GN Green LED module instead.
- -RA Red/Amber LED module instead
- -YE Yellow I FD module in

Trims

-26 Tamper-proof flush mounted door screws

Frame Finishes

- -35 Natural aluminum acrylic enamel.
- -36 Gold acrylic enamel.
- 37 Dark Bronze acrylic enamel.
- 38 Black acrylic enamel.
- 94 Custom color/finish. Specify. Consult factor

Voltage / Battery Pack

- Remote emergency battery pack. Consultant factory.
- 97 Other voltage input. Consult factory.
- -98 347 volt, 50/60 Hz. input. Consult factory

Other

- 99 Special modification. Consult factory.
- -FF Fastener free faceplate / trim. No visible

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME

TYPE

WATTAGE VOLTAGE

CATALOG NUMBER