


CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

Wayfinding Series

Square 5" x 5" Nightlight • LED

Mounts in Standard Octagon Outlet Box (Provided) • Type IC
Angled 45° LED Engine for Optimal Illumination of Floor

LNS-05087

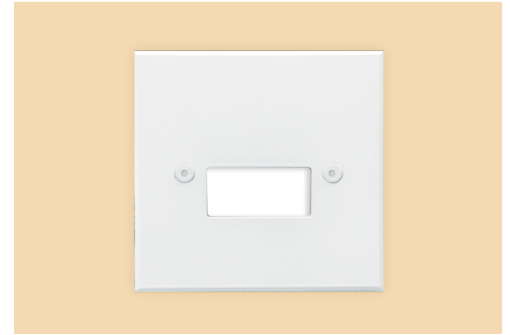

Specifications

LED

- White module (colored filters optional)
- 3500°K standard
- 5 system watts - energy efficient, uniform, cool

LED Power Supply/Driver

- Max 13 volt DC and 4 watt fixed output; electronically stabilized
- Minimum operating temperature -4°F (-20°C)
- 120-277 volt standard; load insensitive

Lens (Gasketed)

- Tempered microprismatic glass

Faceplate (Gasketed)

- Gasketed rustproof aluminum trim

- White finish standard; optional colors
- Optional (white only) antimicrobial Kirlin BioGard™ finish; see Option -BG
- Secured to housing with two screws and captive nuts
- For fastener free faceplate, see Option -FF
- Removable for servicing

Housing: Shallow 2¼" Depth

- 4" x 2 ¼" standard U. L. listed octagon galvanized steel outlet box

Installation

- Recesses indoor or outdoor, covered locations; versatile 2¼" depth
- Mounting holes on top, bottom and ends

UL, C-UL (Canada) Listings


- Damp or dry locations
- Type IC; approved for direct contact with insulation

FIVE YEAR Limited Warranty

- Complete standard fixture

Options and Ordering Configuration


(Example: LNS-05087-BL-37-26)




Required	Optional				
Model	CCT	Voltage/Battery Pack	Filter Colors	Faceplate Finishes	Other Options
LNS-05087	(Blank): 3500K -30K: 3000K -35K: 3500K -40K: 4000K -590: 590nm amber -617: 617nm red/orange	(Blank): Universal 120-277 V -97: Other voltage input; consult factory -EI: Remote emergency inverter for 100% of rated lumens; Run time: 90+ minutes; 120 or 277V, 60Hz input only; specify voltage	(Blank): None -BL: Blue filter -GE: Green filter -OR: Orange filter -RA: Red/Amber filter -YE: Yellow filter -CF: Custom color filter (Rosco); specify	(Blank): Standard white finish -35: Silver (natural aluminum) acrylic enamel -37: Dark bronze acrylic enamel -38: Black acrylic enamel -BG: BioGard™ anti-microbial white -BKBG: BioGard™ anti-microbial black -94: Custom color; consult factory -94BG: BioGard™ anti-microbial custom color finish	(Blank): None -26: Faceplate secured to housing with two center pin tamperproof screws; tamperproof tool included -99: Special modification; consult factory -FF: Fastener free faceplate/trim; no visible hardware (UL Damp Listed only) -PC: Photocell; nightlight will illuminate when room is dark

Performance

Footcandle Performance On the Floor - Top View
(Installed 14" above finished floor)

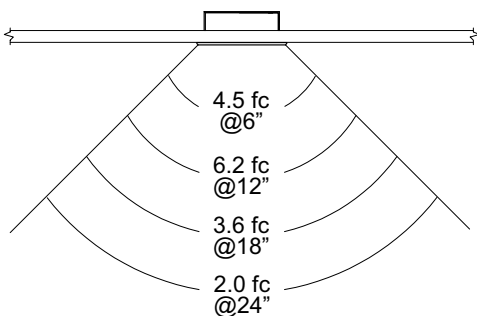

Dimensions

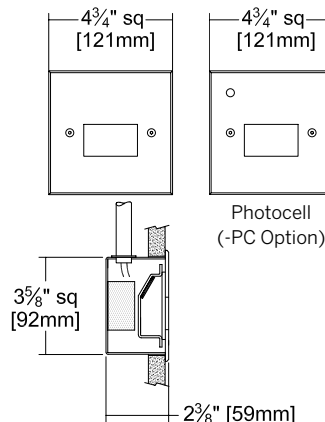

LED Filter Colors

