


CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

Wayfinding Series

Mini-Rectangle 3" x 5" Steplight • LED

50,000 Hour Rated • Type IC • Optional LED Filter Colors

LNT-03091

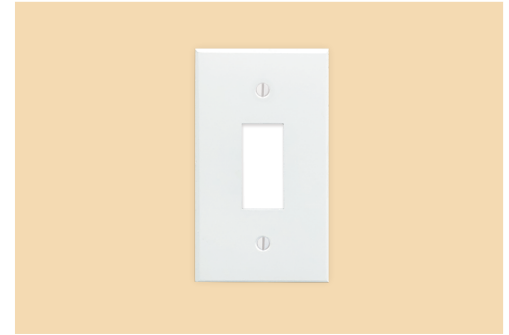

Specifications

LED

- White module (colored filters optional)
- 3500°K standard
- 4 system watts - energy efficient, uniform, cool

LED Power Supply/Driver

- Max 13 volt DC and 4 watt fixed output; electronically stabilized
- Minimum operating temperature -4°F (-20°C)
- 120-277 volt standard; load insensitive

Lens

- Translucent white 1/8" polycarbonate sealed to trim

Faceplate

- Rustproof aluminium trim
- White finish standard; optional colors
- Optional (white only) antimicrobial Kirlin BioGard™ finish; see Option -BG
- Secured to housing with two screws and captive nuts
- Removable for servicing

Housing: Shallow 3 1/2" Depth

- 2" x 3" x 3 1/2" standard U. L. listed galvanized steel outlet box

Installation


- Recesses indoor or outdoor, covered locations; versatile 3 1/2" depth
- Mounting holes on top and bottom

UL, C-UL (Canada) Listings

- Damp or dry locations
- Type IC; approved for direct contact with insulation

FIVE YEAR Limited Warranty

- Complete standard fixture




Options and Ordering Configuration

(Example: LNT-03091-BL-37-26)


Required	Optional			
Model	Voltage/Battery Pack	Filter Colors	Faceplate Finishes	Other Options
LNT-03091	<p>(Blank): Universal 120-277 V</p> <p>-97: Other voltage input; consult factory</p> <p>-EI: Remote emergency inverter for 100% of rated lumens; Run time: 90+ minutes; 120 or 277V, 60Hz input only; specify voltage</p>	<p>(Blank): None</p> <p>-BL: Blue filter</p> <p>-GE: Green filter</p> <p>-OR: Orange filter</p> <p>-RA: Red/Amber filter</p> <p>-YE: Yellow filter</p> <p>-CF: Custom color filter (Rosco); specify</p>	<p>(Blank): Standard white finish</p> <p>-35: Silver (natural aluminum) acrylic enamel</p> <p>-37: Dark bronze acrylic enamel</p> <p>-38: Black acrylic enamel</p> <p>-BG: BioGard™ anti-microbial white</p> <p>-BKBG: BioGard™ anti-microbial black</p> <p>-94: Custom color; consult factory</p> <p>-94BG: BioGard™ anti-microbial custom color finish</p>	<p>(Blank): None</p> <p>-26: Faceplate secured to housing with two center pin tamperproof screws; tamperproof tool included</p> <p>-99: Special modification; consult factory</p>

Performance

Footcandle Performance Opposite Fixture Installed Top View

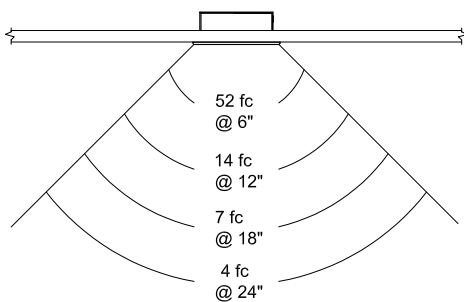

Dimensions

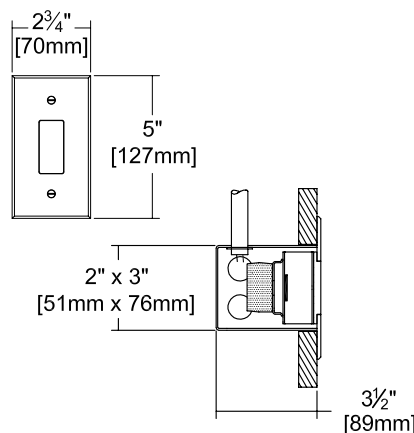

LED Filter Colors

