

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

Wayfinding Series

Louvered 7" x 10" Nightlight • LED

Type IC • Optional LED Filter Colors

LNT-07101



Specifications

LED

- White module (colored filters optional)
- 3500°K standard
- 5.5 system watts - energy efficient, uniform, cool
- 35 lumens typical

LED Power Supply/Driver

- Max 13 volt DC and 4 watt fixed output; electronically stabilized
- Minimum operating temperature -4°F (-20°C)
- 120-277 volt standard; load insensitive

Lens

- Diffuse acrylic lens behind louver

Faceplate (Gasketed)

- Beveled and gasketed cast aluminum frame pulls tight to wall
- Die-formed and louvered aluminum door bolts tightly to frame with two flush mounted screws

- Gasketing between door and frame
- White finish standard; optional colors
- Optional (white only) antimicrobial Kirlin BioGard™ finish; see Option -BG
- Optional lens instead of louver available with all colors; see Option -17
- Tamper resistant available; see Option -26
- Optional hospital grade duplex receptacle, GFCI and push button on-off switch available; rated 120V only; must add Option -120

Housing: Shallow 3" Depth

- Cool; acrylic enameled aluminum; Rustproof: Exceeds 1000 hour ASTM 5% salt spray test
- Dissipates heat across entire surface area
- Serviceable through removable door assembly

Installation

- Recesses in wall indoor or outdoor, covered locations
- Mounting holes on housing ends

UL, C-UL (Canada) Listings


- Damp or dry locations
- See Option -WL for wet locations
- Type IC; approved for direct contact with insulation

FIVE YEAR Limited Warranty

- Complete standard fixture


Options and Ordering Configuration

(Example: LNT-07101-BL-37-26)



Required	Optional				
Model	Voltage/Battery Pack	Filter Colors	Lens and Trim	Faceplate Finishes	Other Options
LNT-07101	<p>(Blank): Universal 120-277 V</p> <p>-97: Other voltage input; consult factory</p> <p>-120: 120V (50-60Hz) input; required for Options -34, -GF or -HD</p> <p>-EI: Remote emergency inverter for 100% of rated lumens; Run time: 90+ minutes; 120 or 277V, 60Hz input only; specify voltage</p> <p>-HW: Higher light output; approximately doubles light output and system watts</p>	<p>(Blank): None</p> <p>-BL: Blue filter</p> <p>-GE: Green filter</p> <p>-OR: Orange filter</p> <p>-RA: Red/Amber filter</p> <p>-YE: Yellow filter</p> <p>-CF: Custom color filter (Rosco); specify</p>	<p>(Blank): None</p> <p>-17: .220" polycarbonate and white acrylic behind diffusion layer, with door instead of louvers; not available with Option -PC</p> <p>-34 With hospital grade push button on-off switch; indoor use; rated 120V only; must add Option -120; not available with Option -PC or -WL</p> <p>-GF: With hospital grade duplex GFCI installed; indoor use; rated 120V only; must add Option -120; not available with Option -PC or -WL</p> <p>-HD: With hospital grade duplex receptacle installed; indoor use; rated 120V only; must add Option -120; not available with Option -PC or -WL</p>	<p>(Blank): Standard white finish</p> <p>-35: Silver (natural aluminum) acrylic enamel</p> <p>-37: Dark bronze acrylic enamel</p> <p>-38: Black acrylic enamel</p> <p>-BG: BioGard™ anti-microbial white</p> <p>-BKBG: BioGard™ anti-microbial black</p> <p>-94: Custom color; consult factory</p> <p>-94BG: BioGard™ anti-microbial custom color finish</p>	<p>(Blank): None</p> <p>-26: Faceplate secured to housing with two center pin tamperproof screws; tamperproof tool included</p> <p>-99: Special modification; consult factory</p> <p>-PC: Photocell; nightlight will illuminate when room is dark; not available with Option -17 lens or switch and receptacle options</p> <p>WL: UL Wet Location listed; not available with switch or receptacle options</p>

Dimensions








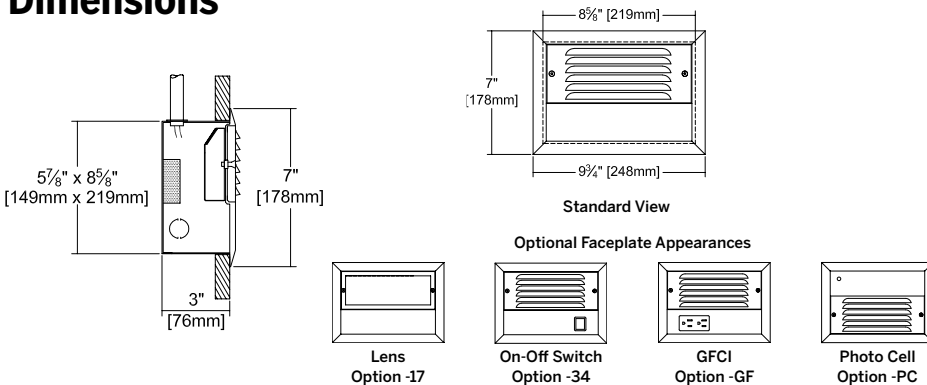


LED Filter Colors



Performance

Footcandle Performance On the Floor - Top View
Photometry from I.T.L., Boulder, CO

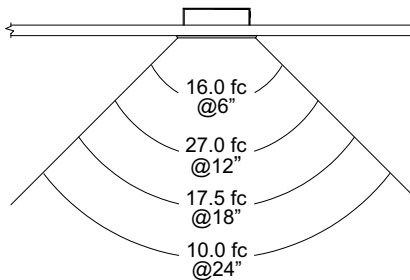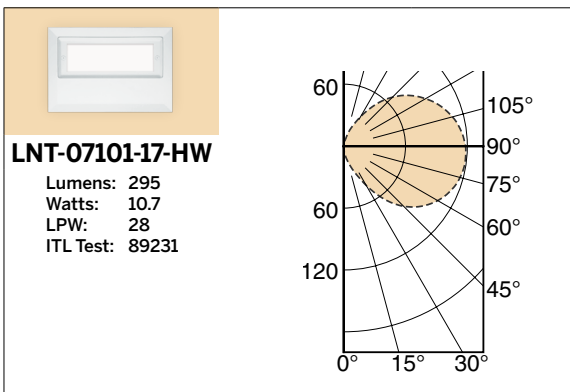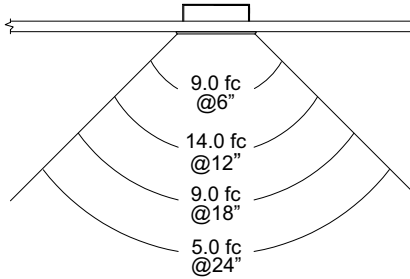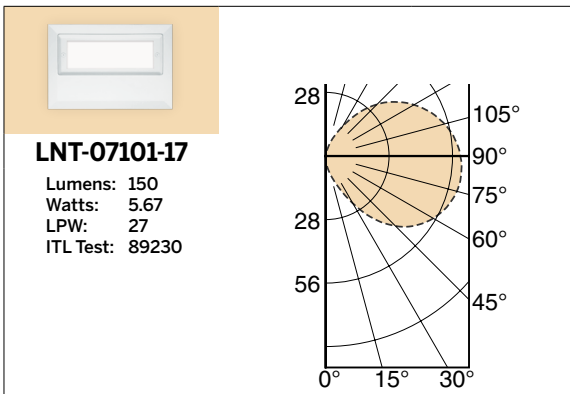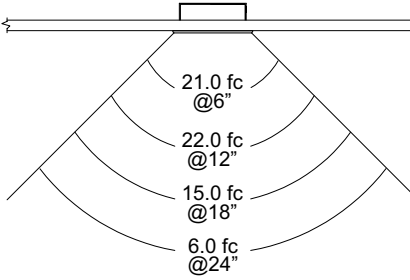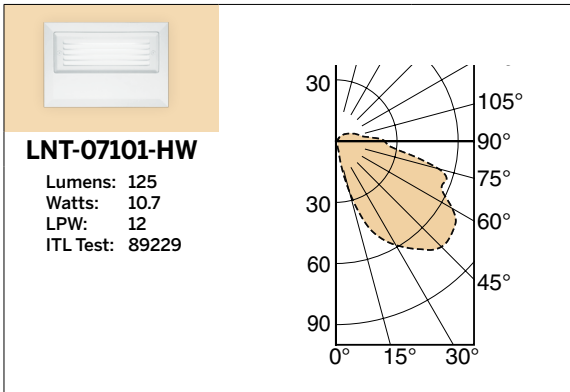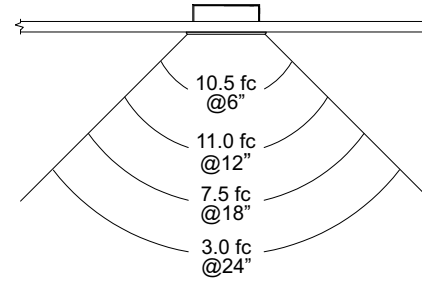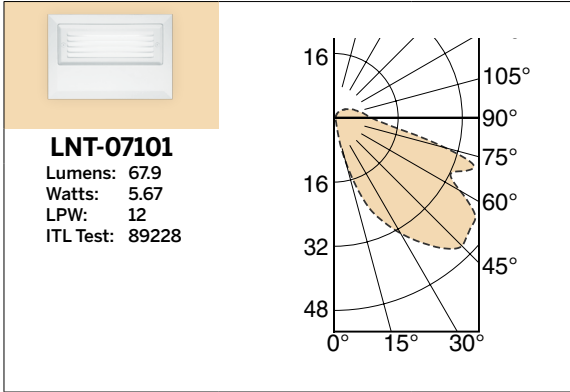

Also available in thru-the-wall version, see LNT-07102