

CATALOG #		TYPE	
JOB NAME	WATTAGE	VOLTAGE	

7" x 10" LED

LNT-07124

# LED Type IC Louvered NightLight Optional Lens and LED Colors

# **Features**

### LED

- White recessed module (colors optional).
- 2.7 watts energy efficient, uniform luminance, cool
- 35 luments typical.

#### **LED Power Supply**

- 10 volt DC. Electronically stabilized.
- Minimum operating temperature -4°F (-20°C).
- 120 volt standard. Load insensitive.

#### Lens

 .187" high strength acrylic prismatic lens behind louver.

#### **Trim Assembly**

- Attractively beveled and gasketed cast aluminum frame pulls tight to wall
- Die-formed and louvered aluminum door bolts tightly to frame with two flush mounted screws
- Gasketing between door and trame.
- White finish standard. Optional colors

- Optional lens (-17) instead of louver available with all colors.
- Tamper resistant available. See Option -26.
- Optional hospital grade duplex receptacle GF and push button on-off switch available.

### Housing: Shallow 3"

- Cool. Acrylic enameled aluminum. Rustproof: Exceeds 1000 hour ASTM 5% salt spray test
- Dissipates heat across entire surface area.
   Services le through removable door assembly
- Serviceable through removable door assembly

  Installation

# Recesses in wall indoor or outdoor, covered


locations. Minimum operating temp. -4°F (-20°C)
Mounting holes provided on top, bottom and

### UL, C-UL (Canada) Listings

- Damp or dry locations, covered locations.
- Type IC. Approved for direct contact with insulation.

### Three Year Limited Warrant

Complete standard fixture.




Recessed
Rectangular
Louvered NightLight
Type IC
LED

### Selected Options:

- Acrylic Lens Option
- On-Off Switch Option -3x
- GFCI Option -GF

nstalled Top View

# Performance at a Glance

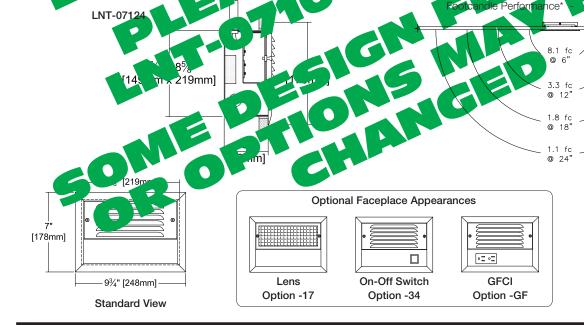

\* Based on 14" mounting height; measuring footcandles at the floor perpendicular to the

# THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232 (313) 259-6400 • Fax: (313) 259-9409 or (313) 259-3121 • www.kirlinlighting.com

RENAISSANCE SERIES
COMPACT FLUORESCENT LIGHTING

MAXIMUM WATTAGE

CATALOG NUMBER

LED

LNT-07124



# **Options**

## **LED Colors**

- -BL Blue LED module instead.
- -GN Green LED module instead.
- -OR Orange LED module instead.
- -RA Red/Amber LED module instea
- -YE Yellow LED module instead.

#### Voltage / Battery Pac

- -58 277 volt 60 Hz, ballast
- 73 Emergency battery pack. Consult factory.
- -97 Other voltage input. Consult factory.
- -98 347 volt, 50/60 Hz. Input. Consult factory

#### **Lenses and Trims**

- 17 187 high strength prismatic acrylic tens with door instead of louvers.
- 26 Tamper-proof flush mounted door screws.
- With hospital grade bush button on-off switt Controls LED panel. Indooruse.
- -GF With duplex hospital grade GFCI installed.
  White indoor use.
- HD With white duplex hospital grade receptacle

# Luminaire (Faceplate) Finishes

- Natural aluminum acrylic enameled faceplate/door and frame.
- Gold acrylic enameled faceplate/door and frame
- -37 Dark Bronze acrylic enameted faceplate/doc
- -38 Black arcylic enameled faceplate/door and

94 Custom color. Specify parts. Consult factor

#### Other

-99 Special modification. Consult factor

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME

TYPE

WATTAGE VOLTAGE

CATALOG NUMBER