

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

7" x 10" LED LNT-07128

LED Thru-the-Wall Type IC NightLight

Features

LED

- Two white recessed modules (colors optional).
- 5.3 watts/panel- energy efficient, uniform, cool.
- 69 lumens typical.

LED Power Supply

- 10 volt DC (quantity: 2). Electronically stabilized.
- Minimum operating temperature -4°F (-20°C).
- 120 volt standard. Load insensitive.

Lenses Behind Louvers (Gasketed)

- High strength .187" prismatic acrylic.
- Prevents sound transmission between rooms.

Trim Assemblies - Both Sides (Gasketed)

- Attractively beveled and gasketed cast aluminum frame pulls tight to wall. White finish standard.
- Die-formed and louvered aluminum door bolts tightly to frame with two flush mounted screws.
- Tamper resistant available. See Option -26.
- Optional lens, hospital grade duplex receptacle, GFCI and push button on-off switch available.

Housing

- Cool. Acrylic enameled aluminum. Rustproof.
- Exceeds 1000 hour ASTM 5% salt spray test.
- Dissipates heat across entire surface area.
- Serviceable through removable door assembly.

Installation



- Recesses indoors or outdoors, covered locations.
- Minimum operating temperature: -4°F (-20°C).
- Adjusts to walls from 4-3/8" to 5-1/4" thick.
- Mounting holes provided on top, bottom and ends for mounting to masonry or steel studs.

UL, C-UL (Canada) Listings

- Damp or dry locations, covered ceilings.
- Type IC. Approved for direct contact with insulation.

Three Year Limited Warranty



- Complete standard fixture (and ballast).

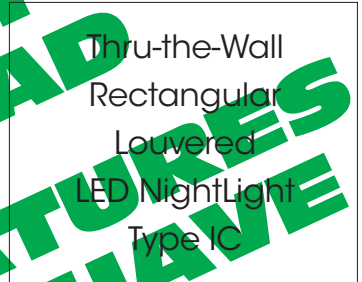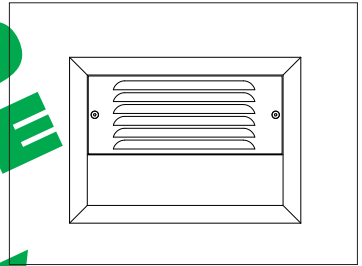

Selected Options:


- GFCI or Receptacle
- Lens
- On-Off Switch

Performance at a Glance

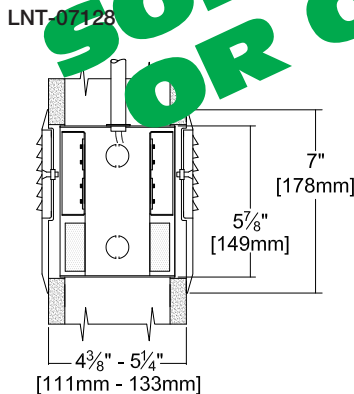


Standard View


Footcandle Performance* - Installed Top View

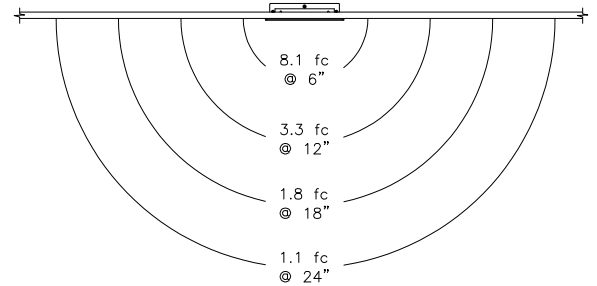

Optional Faceplate Appearances



Lens
Option -L1, -L2



GFCI
Option -G1, -G2

* Based on 14" mounting height; measuring footcandles at the floor perpendicular to the lens.

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

RENAISSANCE SERIES
COMPACT FLUORESCENT LIGHTING

MAXIMUM WATTAGE

LED

CATALOG NUMBER

LNT-07128

DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

Options

Wattage and Voltage

- 75 Remote emergency battery pack. Consult factory.
- 97 Specify other voltage. Consult factory.
- 98 347 volt, 50/60 Hz. input. Consult factory.

LED Colors

- BL Blue LED module instead.
- GN Green LED module instead.
- OR Orange LED module instead.
- RA Red/Amber LED module instead.
- YE Yellow LED module instead.

Lenses and Trims

- 26 Tamper-proof flush mounted door screws
- G1 With duplex hospital grade GFCI installed on one side. White. Indoor use.
- G2 With duplex hospital grade GFCI installed on both sides. White. Indoor use.
- H1 With duplex hospital grade receptacle on one side. White. Indoor use.
- H2 With duplex hospital grade receptacle on both sides. White. Indoor use.
- L1 .187" high strength acrylic prismatic lens and door instead on one side. Louvers on other side.
- L2 .187" high strength acrylic prismatic lens and door instead on both sides.
- S1 With hospital grade push button on-off switch installed on one side. Controls both lamps / LED panels. Indoor use.

Luminaire (Faceplate) Finishes

- 35 Natural aluminum acrylic enamel.
- 36 Gold acrylic enamel.
- 37 Dark Bronze acrylic enamel.
- 38 Black acrylic enamel.
- 93 Custom color/finish. Specify. Consult factory.

Other

- 99 Special modification. Consult factory.

**THIS FIXTURE IS NO LONGER AVAILABLE
PLEASE SPECIFY LNT-07128 INSTEAD
SOME DESIGNS MAY HAVE OR OPTIONS CHANGED**

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALLED TO N.E.C. IN NORMAL USE. Manufacturer at his option will replace or repair such fixture or refund the purchase price or presentation of proof of purchase and defective fixture at the offices of manufacturer within three years of original shipment. Liability of manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Additional uses, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME
TYPE
WATTAGE
CATALOG NUMBER

VOLTAGE