

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

Wayfinding Series

Maximum Security 7" x 9" Nightlight • LED

Type IC • Optional LED Filter Colors

LNV-07126



Specifications

LED

- White module (colored filters optional)
- 3500°K standard
- 5.5 system watts - energy efficient, uniform, cool

LED Power Supply/Driver

- Max 13 volt DC and 4 watt fixed output; electronically stabilized
- Minimum operating temperature -4°F (-20°C)
- 120-277 volt standard; load insensitive

Lens (Gasketed)

- ¼" clear polycarbonate behind louver
- Secured between faceplate and housing by center pin tamperproof screws and captive nuts
- Gasketing between lens and faceplate

Faceplate (Gasketed)

- White polyester enameled die-formed 16 gauge galvanized steel
- Secured to housing with four center pin tamperproof screws and captive nuts; tamperproof tool included
- Gasketing between faceplate and wall
- Optional (white only) antimicrobial Kirlin BioGard™ finish; see Option -BG
- Removable for servicing

Housing

- 16 gauge galvanized steel, formed and welded; white acrylic enamel finish

Installation

- Recesses indoor or outdoor, covered locations
- Ten ½" T.S. (7/8" dia.) wiring KO's
- Mounting holes on housing ends

UL, C-UL (Canada) Listings

- Damp or dry locations
- Type IC; approved for direct contact with insulation

FIVE YEAR Limited Warranty

- Complete standard fixture

Options and Ordering Configuration


(Example: LNV-07126-BL-37-26)




Required	Optional				
Model	Voltage/Battery Pack	Filter Colors	Lens and Trim	Faceplate Finishes	Other Options
LNV-07126	<p>(Blank): Universal 120-277 V</p> <p>-97: Other voltage input; consult factory</p> <p>-EI: Remote emergency inverter for 100% of rated lumens; Run time: 90+ minutes; 120 or 277V, 60Hz input only; specify voltage</p> <p>-HW: Higher light output; approximately doubles light output and system watts</p>	<p>(Blank): None</p> <p>-BL: Blue filter</p> <p>-GE: Green filter</p> <p>-OR: Orange filter</p> <p>-RA: Red/Amber filter</p> <p>-YE: Yellow filter</p> <p>-CF: Custom color filter (Rosco); specify</p>	<p>(Blank): None</p> <p>-17: Diffuse acrylic lens behind .220" clear polycarbonate and faceplate (instead of louver)</p>	<p>(Blank): Standard white finish</p> <p>-35: Silver (natural aluminum) acrylic enamel</p> <p>-37: Dark bronze acrylic enamel</p> <p>-38: Black acrylic enamel</p> <p>-BG: BioGard™ anti-microbial white</p> <p>-BKBG: BioGard™ anti-microbial black</p> <p>-94: Custom color; consult factory</p> <p>-94BG: BioGard™ anti-microbial custom color finish</p>	<p>(Blank): None</p> <p>-99: Special modification; consult factory</p>

Performance

Footcandle Performance On the Floor - Top View
(Installed 14" above finished floor)

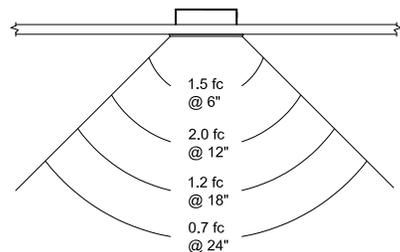

Dimensions

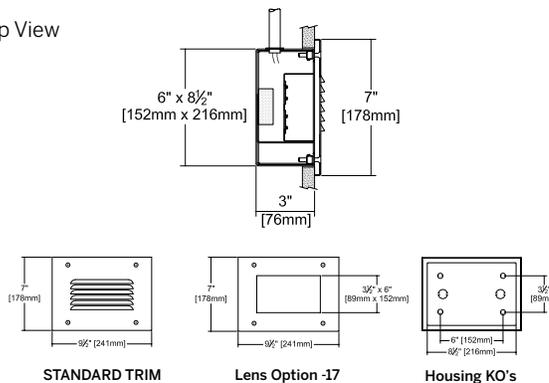

LED Filter Colors

