

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

7" x 9" LED LNV-07130

LED Vandal Resistant NightLight

Features

LED

- White module (color filters optional).
- 2.7 watts (34 lumens)

LED Power Supply / Driver

- 10 volt DC. Electronically stabilized.
- Minimum operating temperature: -4°F (-20°C)
- 120 volt standard. Load insensitive.

Lens (Gasketed)

- 1/4" clear polycarbonate behind louver.
- Secured between faceplate and housing by center pin tamperproof screws and captive nuts.
- Gasketing between lens and faceplate.

Faceplate (Gasketed)

- White polyester enameled die-formed 16 gauge galvanized steel. Removable for servicing.
- Secured to housing with four center pin tamperproof screws and captive nuts.

- Gasketing between faceplate and wall.
- Tamperproof tool included.

Housing

- 16 gauge galvanized steel, formed and welded. White acrylic enamel finish.

Installation


- Recesses indoors or outdoors, covered locations.
- Minimum operating temperature: -4°F (-20°C).
- Ten 1/2" T.S. (7/8" dia.) wiring KO's.
- Mounting holes provided on top, bottom, ends and rear.

UL, C-UL (Canada) Listings

- Wet, damp or dry locations.
- Type IC. Approved for direct contact with insulation.

Three Year Limited Warranty



- Complete standard fixture (and ballast).

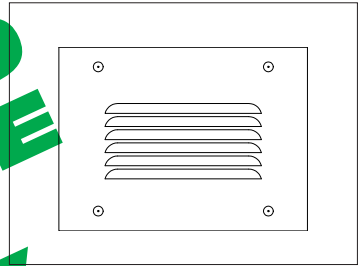


Selected Options:

- Blue LED Option -BL
- Green LED Option -GN
- Orange LED Option -OR
- Red/Amber LED Option -RA
- Yellow LED Option -YE


Performance at a Glance

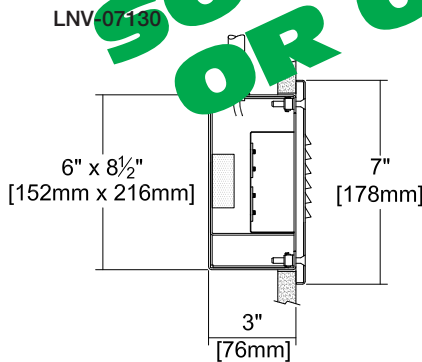

Standard View




Lens Option -17



Housing KO's

Footcandle Performance On the Floor - Top View
(Installed 14" above finished floor.)

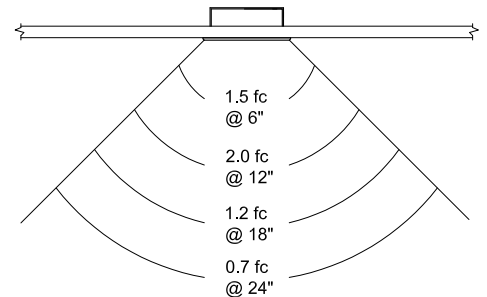

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

RENAISSANCE SERIES
COMPACT FLUORESCENT LIGHTING

MAXIMUM WATTAGE

LED

CATALOG NUMBER

LVN-07130

DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

Options

Voltage / Battery Pack

- 58 277 volt, 60 Hz. ballast. Consult factory.
- 75 Remote battery pack. Consult factory.
- 97 Specify other voltage. Consult factory.

LED Colors

- BL Blue Filter.
- GN Green Filter.
- OR Orange Filter.
- RA Red/Amber Filter.
- YE Yellow Filter.

Faceplate Finishes

- 35 Natural aluminum acrylic enamel.
- 36 Gold acrylic enamel.
- 37 Dark Bronze acrylic enamel.
- 38 Black acrylic enamel.
- 94 Custom color/finish. Specify. Consult factory.

Other

- 99 Special modification. Consult factory.

**THIS FIXTURE IS NO LONGER AVAILABLE
PLEASE SPECIFY LNV-07126 INSTEAD
SOME DESIGN FEATURES OR OPTIONS MAY HAVE CHANGED**

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALLED TO N.E.C. IN NORMAL USE. Manufacturer at his option will replace or repair such fixture or refund the purchase price or presentation of proof of purchase and defective fixture at the offices of manufacturer within three years of original shipment. Liability of manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Additional uses, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME

TYPE

WATTAGE

VOLTAGE

CATALOG NUMBER