

CATALOG #	TYPE
JOB NAME	VOLTAGE

LRR-02027-2000L
LRR-02027-1500L
LRR-02027-1000L

Pinhole Open Appearance 2" LED Adjustable

Up to 90,000 Hour Life • Type IC • Air Tight Optional
10% Dimming • NFL • 5 CCT • 3-Step Binning
LM-80 Qualified • LM-79 Certified • Wet Location



Specifications

Delivered System Performance*

- Lumen Series: **MUST SPECIFY**
- 2000L: 2000 nominal lumens (25W).
- 1500L: 1500 nominal lumens (20W).
- 1000L: 1000 nominal lumens (11W).
- Distribution: NFL standard.
- Color temperature: 3500°K standard. Optional: -27K, -30K, -41K or -50K.
- CRI: 80+ standard. Optional: -HC (90+).
- 90,000 hour life (L70**).
- Fully sustainable: removable for servicing.

Center Beam Optics

- Self-aligns with trim for optimal performance.
- Hot aiming by hand.
- Tilts from 0° to 45° and locks in place.
- Rotates full 360° and locks in place.
- Accommodates sloped ceilings up to 45°.

Thermal Management System

- All aluminum heat sink, components and housing maximize cool operation and long life while minimizing maintenance.

LED Power Supply - INTERNAL

- Suitable for outdoor / indoor use:

- 30°C (-22°F) to 60°C (140°F) standard.
- 120-277V / 50-60Hz standard. Load insensitive.

0-10V CCR dimming standard. (100-10%) Pinhole Trim

- White die cast flat aluminum (field paintable). Low brightness black inner bevel and angle cut cone with clear tempered glass lens above.

Acrylic Enameled Aluminum Housing

- Rustproof and corrosion resistant: Exceeds 1000 hour ASTM 5% salt spray test.
- Shallow depth fits restricted plenums.
- Cool operation: Extends life of all components.
- Entire luminaire, including LED light engine, is modular, easily visible and serviced through aperture.
- Built-in plaster flange.

Outlet Box

- UL listed J-box with insulated removable cover. Prewired 14 GA (NEC) with 1/2" and 3/4" knockouts.

Installation

- Recess indoor or outdoor.

- Accommodates ceilings up to 1-1/8" thick.
- Compatible with fire rated enclosures (by others).
- 27" galvanized hanger bars with adjustable mounting brackets (2) supplied.

UL, C-UL (Canada) Listings

- Wet, damp or dry locations, covered ceilings.
- Type IC: for direct contact with insulation.
- Through-branch conductors (4 #12 AWG 90°C) for Type IC Listing.

IEC & FCC Compliance

- Meets IEC/EN 60601-1-2 electromagnetic compatibility standard for medical electrical equipment.
- FCC Part 15 certified for EMI/RFI emissions.

5 FIVE YEAR Limited Warranty

- Complete standard fixture.

MUST SPECIFY		OPTIONAL	Ordering Example: LRR-02027-2000L-120-30K-32
Product Number	Voltage	Options	
LRR-02027-2000L LRR-02027-1500L LRR-02027-1000L	-120 (120 volts) -277 (277 volts) -97 (Specify other)	See "Options" below	

Options

Input Power: SPECIFY

- 120 120V (50-60Hz) input.
- 277 277V (50-60Hz) input.
- 97 Specify other voltage. Consult factory.

LED Power Supply

- D1† 0-10V 1.0% dimming instead.
- D2† 0-10V 0.1% dimming instead.
- D3† DALI 1.0% dimming instead.
- D4† DALI 0.1% dimming instead.
- D5† DMX512A 0% dimming instead for -1000L only.
- D40 -40°C driver with 0-10V 10% dimming instead.
- EI Remote emergency inverter for 100% of rated lumens. Run time: 90+ minutes. 120

† Consult factory for use with -2000L lumen series.

or 277V, 60 Hz input only. Specify voltage. Not for use with Options -FS.

- EM INTERNAL emergency battery pack. Delivers 500 lumens. Run time: 90+ minutes.
- ERH REMOTE emergency battery pack. Delivers 1000 lumens. Run time: 90+ minutes. CEC Compliant.

Color (CCT and CRI)

- 27K Color temperature 2700°K instead.
- 30K Color temperature 3000°K instead.
- 41K Color temperature 4100°K instead.
- 50K Color temperature 5000°K instead.
- HC 90+ CRI instead. Consult factory.

Trim

- 32 White oversize trim ring. Specify O.D.
- 35T Silver enamel (complete trim).
- 37T Dark bronze enamel (complete trim).
- 38T Black enamel (complete trim).
- 45 Gasket between trim flange and ceiling.
- 94 Custom color/finish. Specify. Consult factory.
- BN Brushed satin nickel finish.

- CF Custom color (Rosco) filter. Specify.
- DF Electrically isolated "dead front" gasketed trim.



Other

- 99 Special modification. Consult factory.
- AT Air tight version. Meets ASTM E283 restricted airflow of 2 CFM maximum.
- FS Single in-line fuse. Not for use with Option -EI.
- RH Residential mounting hardware instead. Suitable for wood joist ceilings with spacing from 14 1/8" to 25 7/8" with 5/8" vertical adjustability.

Projected L70** for Kirlin Luminaires	
In Open Plenum	90,000 hours
In Insulation (Type IC)	60,000 hours

**Hours at 70% lumen maintenance

Dimensions

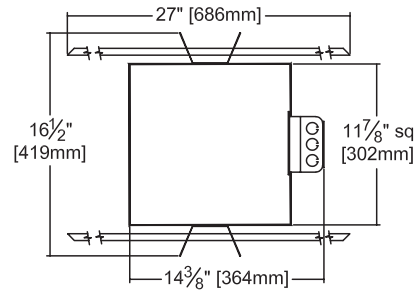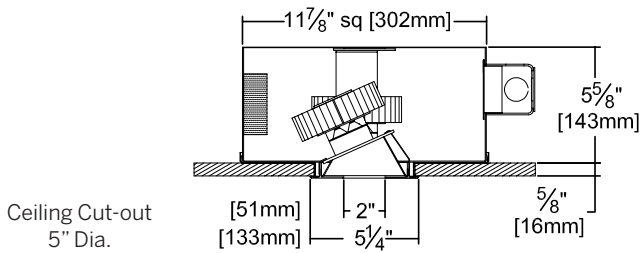

Detailed Photometry - Installed Fixture

Photometric testing done in accordance with IESNA LM-79


Photometry from I.T.L., Boulder, CO

-1500L STANDARD (NFL)

Lumens: 1102
Beam: ~19°
SC: 0.4
LPW: 53
Efficiency: 54.5%
ITL Test: 87219



Total System Watts 21.0



	CANDLEPOWER DISTRIBUTION				
	0.0	22.5	45.0	67.5	90.0
0	1313	1313	1313	1313	1313
5	3131	2272	1131	598	460
15	8059	2849	344	99	92
25	4351	819	74	18	12
35	723	112	7	3	3
45	8	3	0	0	0
55	0	0	0	0	0
65	0	0	0	0	0
75	0	0	0	0	0
85	0	0	0	0	0
90	0	0	0	0	0

LUMEN SERIES	LUMEN FACTOR	WATTAGE FACTOR	LPW FACTOR
-2000L	1.257	1.369	0.92
-1000L	0.579	0.495	1.17

LM-80 Qualified • LM-79 Certified Photometry

* LED manufacturers maintain a tolerance of ±7% on flux (lumens) and power (electrical) measurements. Kirlin photometrics are actual test data from Independent Testing Laboratories (ITL) where photometry was measured from 2022 lumen (-1500L) light engines (within the established tolerance).

▲ Cone of Light Key
Dia. (in ft.) shown is where FC value is half the FC at nadir.
Dist. Distance (Ft.) from fixture
FC Footcandles at nadir (0°)
Dia. Circle of light at 50% of FC

SUBMITTAL DATA

JOB NAME

TYPE VOLTAGE

CATALOG NUMBER

APPROVAL STAMP



LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR FIVE YEARS FROM DATE OF PURCHASE. INSTALLLED TO N.E.C. IN NORMAL USE. Manufacturer at the option will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the offices of manufacturer within five years of original shipment. Liability of manufacturer is limited to the original and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.