


CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

4" 4 LED 20 SYSTEM WATTS

LRS-04067

Lensed Adjustable • LED • Type IC

50,000+ Hour Life • 84 CRI • 3 Distributions • Air Tight Optional

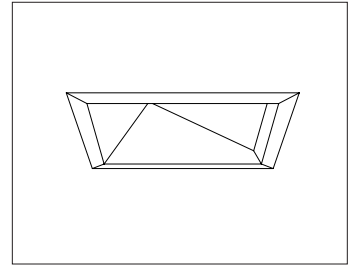

Specifications

LED Light Engine*

- 20 watt LED array. 3500°K standard; optional 3000°K or 4100°K.
- 1050* lumens, 50 lumens per watt (total system).
- 84 CRI, 50,000+ hour life.**
- Fully sustainable: removable for servicing.

Center Beam Optics

- Narrow flood standard (NFL). Optional: spot (SPT) or medium flood (MFL).
- Self-aligning optics ensure precise positioning of LED module with trim for optimal performance.
- Hot aiming by hand or screwdriver.
- Tilts from 0° to 45° in 1° increments and locks in place.
- Rotates full 365° and locks in place.
- Accommodates sloped ceilings up to 45°.

Thermal Management System

- All-aluminum proprietary heat sink, components and housing maximize luminaire's cool operation and long life while minimizing maintenance.

LED Power Supply

- Suitable for outdoor / indoor use: -40°C (-40°F) to 90°C (194°F).
- 120-277V / 50-60Hz standard. Load insensitive.
- Dimming available, see Option -39.
- Kirlin remote SmartSupply™ driver instead, see Option -SS.

Electrically Isolated Trim

- Specular clear aluminum self-flanged and gasketed angle cut with lens on top.
- Non-conductive vinyl coated trim spring clips minimize risk of electric shock.
- Colors and specular finishes available.

Acrylic Enameled Aluminum Housing

- Rustproof and corrosion resistant: Exceeds 1000 hour ASTM 5% salt spray test.
- Shallow depth fits restricted plenums.
- Cool operation: Extends life of all components.
- Fully sustainable: Entire luminaire, including LED light engine, easily visible and serviced through aperture.
- Built-in plaster flange.
- Air Tight design available, see Option -AT.

Outlet Box

- UL listed J-box with insulated removable cover. Prewired 14 GA (NEC) with ½" and ¾" knockouts.

Installation


- Recesses indoor/outdoor in covered locations.
- Accommodates ceilings up to 1-1/8" thick.
- 27" galvanized hanger bars with adjustable mounting brackets (2) supplied.
- For residential mounting hardware for wood joist ceilings, see Option -RH.

UL, C-UL (Canada) Listings

- Wet, damp or dry locations, covered ceilings.
- Type IC: for direct contact with insulation.
- Through-branch conductors (4 #12 AWG 90°C) for Type IC Listing.


5 FIVE YEAR Limited Warranty
 • Complete standard fixture.

Performance at a Glance

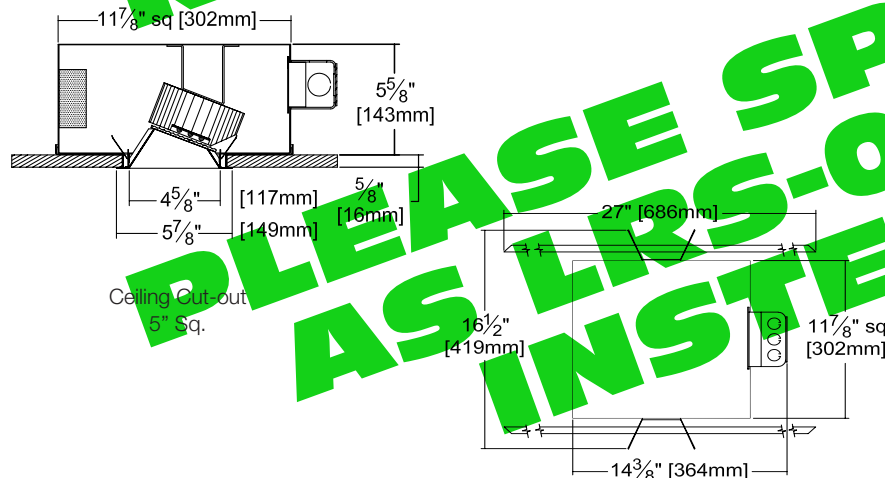


Standard (NFL)

	30°	45°
Lumens:	748	670
Efficiency:	69.3%	62.1%
Beam:	~31°	




Option -SPT

	30°	45°
Lumens:	638	569
Efficiency:	59.2%	52.7%
Beam:	~21°	



Option -MFL

	30°	45°
Lumens:	638	537
Efficiency:	59.1%	49.8%
Beam:	~39°	



THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
 (313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com


Photometry - Installed Fixture

Photometry from I.T.L., Boulder, CO
Photometric testing done in accordance with IESNA LM-79-08


- D: Distance (in feet) to floor or wall.
- FC: Max. footcandles on surface within effective visual beam. (Visual beam is 50% of max. FC.)
- L: Effective visual beam length in feet.
- W: Effective visual beam width (in feet).
- CB: Distance (in feet) to center beam.

Lamp Angle


FC on Horizontal Plane



FC on Vertical Plane




FC on Vertical Plane



LRS-04067 (NFL)

	30°	45°
Lumens:	748	670
Efficiency:	69.3%	62.1%
Beam:	~31°	



D	FC	L	W	CB
4.0	98	2.7	2.4	2.3
6.0	44	4.0	3.5	3.5
7.0	32	4.7	4.1	4.0
8.0	25	5.3	4.7	4.6
9.0	19	6.0	5.3	5.2
10.0	16	6.7	5.9	5.8
12.0	11	8.0	7.1	6.9
14.0	8	9.4	8.3	8.1

D	FC	L	W	CB
2.0	107	2.2	1.7	3.5
3.0	48	3.8	2.5	5.2
4.0	27	4.4	3.3	6.9
5.0	17	5.5	4.2	8.7
6.0	12	6.7	5.0	10.4
8.0	7	8.9	6.7	13.9
10.0	4	11.1	8.4	17.3
12.0	3	13.3	10.0	20.6

D	FC	L	W	CB
2.0	224	1.3	1.3	2.0
3.0	100	1.9	2.0	3.0
4.0	56	2.6	2.6	4.0
5.0	36	3.2	3.3	5.0
6.0	25	3.8	3.9	6.0
8.0	14	5.1	5.2	8.0
10.0	9	6.4	6.6	10.0
12.0	6	7.7	7.9	12.0

LRS-04067 (Option -SPT)

	30°	45°
Lumens:	639	569
Efficiency:	59.2%	52.7%
Beam:	~21°	




D	FC	L	W	CB
4.0	103	2.4	2.0	2.3
6.0	46	3.5	3.1	3.5
7.0	34	4.1	3.6	4.0
8.0	26	4.7	4.1	4.6
9.0	20	5.3	4.6	5.2
10.0	17	5.9	5.1	5.8
12.0	11	7.1	6.1	6.9
14.0	8	8.2	7.1	8.1

D	FC	L	W	CB
2.0	114	2.0	1.4	3.5
3.0	51	3.0	2.2	5.2
4.0	29	3.9	2.9	6.9
5.0	18	4.9	3.6	8.7
6.0	13	5.9	4.3	10.4
8.0	7	7.9	5.8	13.9
10.0	5	9.9	7.2	17.3
12.0	3	11.8	8.6	20.6

D	FC	L	W	CB
2.0	232	1.1	1.1	2.0
3.0	103	1.7	1.7	3.0
4.0	58	2.2	2.3	4.0
5.0	37	2.8	2.9	5.0
6.0	26	3.4	3.4	6.0
8.0	14	4.5	4.6	8.0
10.0	9	5.6	5.7	10.0
12.0	6	6.7	6.8	12.0

LRS-04067 (Option -MFL)

	30°	45°
Lumens:	638	537
Efficiency:	59.1%	49.8%
Beam:	~39°	



D	FC	L	W	CB
4.0	75	2.8	2.5	2.3
6.0	33	4.3	3.8	3.5
7.0	25	5.0	4.4	4.0
8.0	19	5.7	5.0	4.6
9.0	15	6.4	5.7	5.2
10.0	12	7.1	6.3	5.8
12.0	8	8.5	7.6	6.9
14.0	6	9.9	8.8	8.1

D	FC	L	W	CB
2.0	97	1.8	1.7	3.5
3.0	43	2.7	2.6	5.2
4.0	24	3.6	3.6	6.9
5.0	15	4.5	4.3	8.7
6.0	11	5.3	5.2	10.4
8.0	6	7.1	6.9	13.9
10.0	4	8.9	8.7	17.3
12.0	3	10.7	10.4	20.6

D	FC	L	W	CB
2.0	165	1.2	1.4	2.0
3.0	73	1.8	2.1	3.0
4.0	41	2.4	2.8	4.0
5.0	26	3.0	3.5	5.0
6.0	18	3.6	4.2	6.0
8.0	10	4.9	5.6	8.0
10.0	7	6.1	7.0	10.0
12.0	5	7.3	8.4	12.0

* LED manufacturers maintain a tolerance of ±7% on flux (lumens) and power (electrical) measurements. Kirlin photometrics are actual test data from Independent Testing Laboratories (ITL) where photometry was measured from 1000 lumen light engines (within the established tolerance).
** LED Operating Characteristics: 50,000 hours at 70% lumen maintenance.

Options

Trims

- 30 All white acrylic enameled trim. (CP x .95)
- 31 White acrylic enameled trim flange.
- 32 White oversize trim ring. Specify O.D.
- 46 Gasket between trim and lens.
- 59 Dark Bronze specular self-flanged trim. (CP x .80)
- 60 SofTex Dark Bronze self-flanged cone. (CP x .75)
- 63 Dune specular self-flanged cone. (CP x .93)
- 68 Matte black self-flanged cone. (CP x .70)
- 69 Wheat specular self-flanged cone. (CP x .92)
- 70 SofTex Clear self-flanged cone. (CP x .93)
- 71 SofTex Dune self-flanged cone. (CP x .89)
- 72 Black specular self-flanged trim. (CP x .80)
- 77 SofTex Pewter self-flanged trim. (CP x .85)
- 91 SofTex Wheat self-flanged trim. (CP x .88)
- 93 Pewter specular self-flanged trim. (CP x .88)
- 94 Custom color/finish. Specify. Consult factory.

Filter

- AM Amber filter.

- DP Dichroic Peach filter.
- GE Green / Botanical filter.
- HX Hexcel louver.
- MB Medium Blue filter.
- PK Pink / Rose filter.
- XF Custom filter other than shown. Specify.

Other

- 99 Special modification. Consult factory.
- AT Air tight version. Meets ASTM E283 restricted airflow of 2 CFM maximum. Option -RH required.
- DL Downlight square trim instead. Clear specular finish standard or add optional trim selection.
- 30K Color temperature 3000°K instead.
- 41K Color temperature 4100°K. Consult factory.
- RH Residential mounting hardware instead. Suitable for wood joist ceilings with spacing from 14 1/8" to 25 1/8" with 1/2" vertical adjustability.

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME _____
TYPE _____
WATTAGE _____ VOLTAGE _____
CATALOG NUMBER _____

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALL TO N.E.C. IN NORMAL USE. Manufacturer at the option will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the offices of manufacturer within three years of original shipment. Liability of manufacturer is limited to the foregoing and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, improper installation, or repair or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.
REV JAN 2011