

CATALOG #	TYPE
JOB NAME	WATTAGE VOLTAGE

Latitudes Series LED Lighting

2'x 2' Recessed White Panel for Harsh Environments

Ligature & Vandal Resistant • IK10 Impact Resistant • 90 CRI

Up to 60,000 Hour Rated Life (L70) • Wet Location (Covered Ceilings)

Specifications

Delivered System Performance

- Lumen Series: **MUST SPECIFY**
 - 2500L
 - 1500L
- Color temperature: **MUST SPECIFY**
 - 35K: 3500K
 - 41K: 4000K
- Distribution: WFL
- 90 CRI; 60,000 hour rated life (L70)

Thermal Management

- Heavy gauge aluminum construction provides maximum heat dissipation for cool LED operation. Extends life of all components

LED Power Supply - INTERNAL or REMOTE

- 30°C (-22°F) to 60°C (140°F)
- 120-277V / 50-60Hz standard; load insensitive
- 0-10V CCR dimming standard (100-10%) or see Options
- Remote driver in mini cabinet available, see option -REM

- Voltage options for remote driver: **MUST SPECIFY**
 - 120: -120V (50-60Hz); load insensitive
 - 277: -277V (50-60Hz); load insensitive
- Enclosed in aluminum housing


IK10 Vandal Resistant Trim/Lens

- Single-piece, rigid tempered heavy gauge 6063-T5 aluminum frame with seam welded corners and keys
- Rustproof and corrosion resistant
- Flush center pin tamperproof screws
- Tamperproof tool included
- High strength clear flat polycarbonate (0.220") environmental side
- Extruded acrylic wave guide provides unparalleled uniformity

Outlet Box

- UL listed J-box; prewired 16 GA steel with ½" knockouts

LRS-22VFP

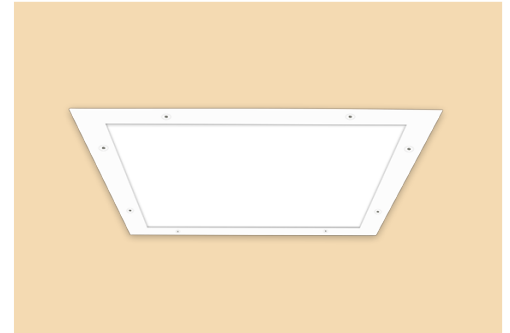

Installation

- Recessed mount for drywall ceilings (structural blocking required - by others)
- Shallow 2⅜" recessed depth to minimize plenum interference

UL, C-UL (Canada) Listings

- Wet, damp or dry locations, covered ceilings

FCC Compliance

- FCC Part 15 certified for EMI/RFI emissions



Made in the USA
BABAA Compliant



Vandal Resistant



IK10 Impact
Resistant



Natatorium
See Option -NAT



BioGard™
See Option -BG



FCC Part 15
Certified



UL Listed
Wet, Damp, Dry

Options and Ordering Configuration

(Example: LRS-22VFP-1500L-35K)

Must Specify			Optional		
Model	Output	CCT	Power Supply	Trim Finish	Other Options
LRS-22VFP					
	-1500L -2500L	-35K: 3500K -41K: 4000K	(Blank): 0-10V 1.0% dimming -D6: Triac 100-10% dimming instead -REM: Driver remote mounted in mini-cabinet; see next page for driver ordering - MUST BE ORDERED SEPARATELY	(Blank): Standard white enamel -35T: Silver enamel trim -37T: Dark bronze enamel trim -38T: Black enamel trim -BG: BioGard™ anti-microbial white -BKBG: BioGard™ anti-microbial black -94: Custom color; consult factory -94BG: BioGard™ anti-microbial custom color finish	(Blank): None -99: Special modification; consult factory -NAT: Modified for natatorium use

Remote Mini-Cabinet Options and Ordering Configuration


(Example: REM-SWCAB-1400B-277-2-D2-EMI)

Must Specify					Optional
Model	Driver Current	Volts	Driver Count	Dimming	Other Options
REM-SWCAB					
	50 Watt Drivers -1400A: 1400mA 50W driver; powers up to (2) 1500L fixtures or (1) 2500L fixture	-120 -277	-1: 1 driver -2: 2 drivers; N/A on -1400C and -2500L -1400B driver options	-D1: 0-10V 1.0% dim -D6: Triac 100-10% dimming instead	(Blank): None -E15: Remote emergency micro-inverter: 50W max load; 90+ minutes run time -EMI: Remote emergency mini-inverter: 125W max load; 90+ minutes run time
	75 Watt Drivers -1400B: 1400mA 75W driver; powers up to (3) 1500L fixtures or up to (2) 2500L fixtures				
	100 Watt Drivers -1400C: 1400mA 100W driver; powers up to (4) 1500L fixtures				

Lumens	Remote Mini-Cabinet	Driver Wattage	Maximum Capacity	
			1 Driver in -REM Cabinet	2 Drivers in -REM Cabinet
-1500L	REM-SWCAB-1400A	50W	Qty 2: 1500L Luminaires, wired in series	Qty 4: 1500L Luminaires, (2 per driver, wired in series)
	REM-SWCAB-1400B	75W	Qty 3: 1500L Luminaires, wired in series	Qty 6: 1500L Luminaires, (3 per driver, wired in series)
	REM-SWCAB-1400C*	100W	Qty 4: 1500L Luminaires, wired in series	N/A
-2500L	REM-SWCAB-1400A	50W	Qty 1: 2500L Luminaire	Qty 2: 2500L Luminaires, (1 per driver)
	REM-SWCAB-1400B	75W	Qty 2: 2500L Luminaires, wired in series	N/A

* 100W XXXXC remote drivers have 2 LED outputs each

Dimensions

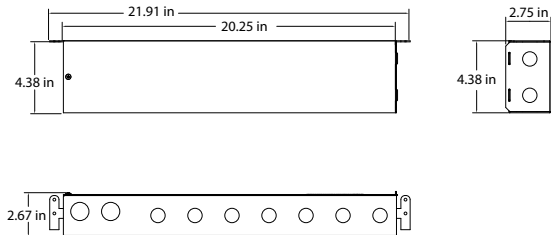


-REM Features


- Drivers can be mounted up to 250' away from fixtures
- Remote mini-cabinets are plenum rated and can be mounted to the ceiling grid
- Low-voltage cabling from driver to fixture(s)
- 1/2" and 3/4" knockouts

50W and 75W Drivers



Exact dimensions of drivers inside the box may vary based on options chosen.




100W Drivers



LIMITED WARRANTY. KALAMAZOO KUTLİN H. ÜS. ARKAKİLE PTE. OF DE CLIN IS WORKMANSHIP OR MATERIAL FOR THE YEARS FROM DATE OF PURCHASE. INSALATED TO N.E.C., IN NORMAL USE. Manufacturer at this option will replace or repair such fixture or relevant part of the purchase price on presentation of proof of purchase and defective fixture at the offices of manufacturer within the basis of original shipment. Liability of manufacturer is limited to the foregoing, and manufacturer shall not be liable for any other damages, direct or indirect, sustained by purchaser or any person. This warranty is not applicable to products sold by third parties. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior approval of manufacturer will void the warranty. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior approval of manufacturer will void the warranty. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior approval of manufacturer will void the warranty.

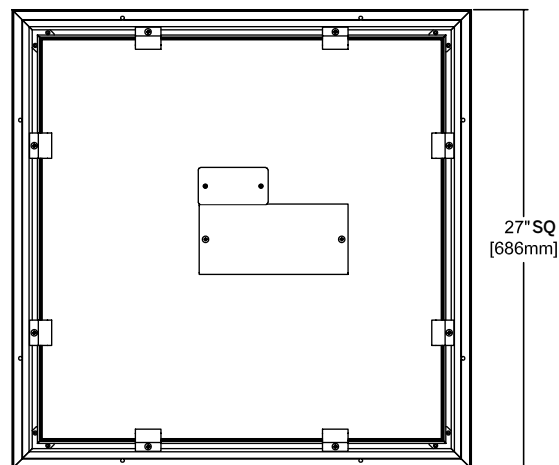

LM-79 IES Certified Photometry from Independent Lab

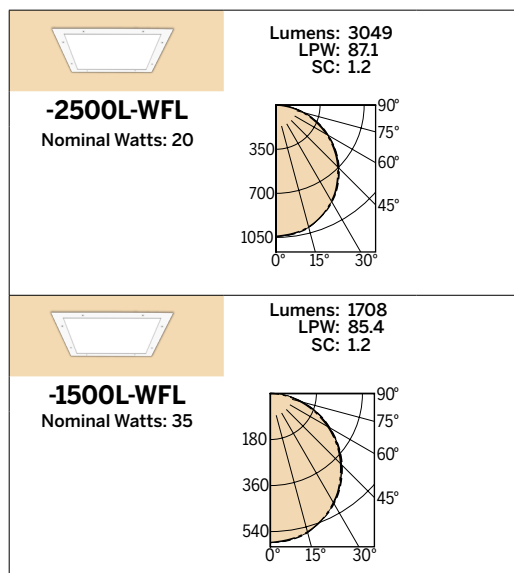

Kirlin Lighting | 3401 E. Jefferson Ave., Detroit, MI 48207-4232, USA | P: 313.259.6400 | www.kirlinlighting.com

DUE TO CONTINUING PRODUCT IMPROVEMENTS, KIRLIN LIGHTING RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. VISIT WWW.KIRLINLIGHTING.COM FOR THE MOST CURRENT DATA.