

Lighting for Patient Spaces

Square 5" x 5" Steplight • LED

Mounts in Standard Octagon Outlet Box (Provided)

Fastener Free Available • Ligature-Resistant with Option -26

Specifications

LED

- White module (colored filters optional)
- 3500°K standard
- 4 system watts - energy efficient, uniform, cool

LED Power Supply/Driver

- Max 13 volt DC and 4 watt fixed output; electronically stabilized
- Minimum operating temperature -4°F (-20°C)
- 120-277 volt standard; load insensitive

Lens (Gasketed)

- 2" diameter translucent white 1/8" polycarbonate

Faceplate (Gasketed)

- Gasketed rustproof aluminum trim

- White finish standard; optional colors
- Optional (white only) antimicrobial Kirlin BioGard™ finish; see Option-BG
- Secured to housing with two screws and captive nuts
- Ligature- and vandal-resistant with Option -26
- For fastener free faceplate, see Option -FF
- Removable for servicing

Housing: Shallow 2 1/4" Depth

- 4" x 2 1/4" standard U. L. listed octagon galvanized steel outlet box, provided

Installation

- Recesses indoor or outdoor, covered locations; versatile 2 1/4" depth
- Mounting holes on top, bottom and ends

MNS-05924



UL, C-UL (Canada) Listings

- Damp or dry locations
- Type IC; approved for direct contact with insulation

FIVE YEAR Limited Warranty

- Complete standard fixture

Options and Ordering Configuration


(Example: MNS-05924-BL-37-26)




Required	Optional				
Model	CCT	Voltage/Battery Pack	Filter Colors	Faceplate Finishes	Other Options
MNS-05924					
	(Blank): 3500K	(Blank): Universal 120-277 V	(Blank): None	(Blank): Standard white finish	(Blank): None
	-30K: 3000K -35K: 3500K -40K: 4000K -590: 590nm amber -617: 617nm red/orange	-97: Other voltage input; consult factory -EI: Remote emergency inverter for 100% of rated lumens; Run time: 90+ minutes; 120 or 277V, 60Hz input only; specify voltage	-BL: Blue filter -GE: Green filter -OR: Orange filter -RA: Red/Amber filter -YE: Yellow filter -CF: Custom color filter (Rosco); specify	-35: Silver (natural aluminum) acrylic enamel -37: Dark bronze acrylic enamel -38: Black acrylic enamel -BG: BioGard™ anti-microbial white -BKBG: BioGard™ anti-microbial black -94: Custom color; consult factory -94BG: BioGard™ anti-microbial custom color finish	-26: Faceplate secured to housing with two center pin tamperproof screws; tamperproof tool included -99: Special modification; consult factory -FF: Fastener free faceplate/ trim; no visible hardware (UL Damp listed only)

Performance

Footcandle Performance Opposite Fixture
Installed Top View

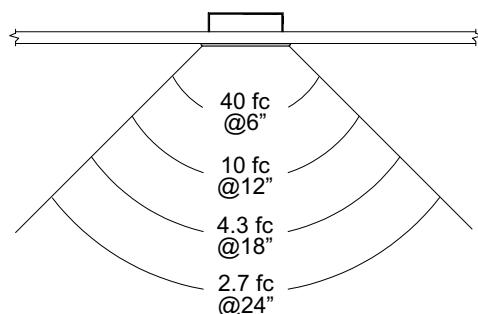

Dimensions

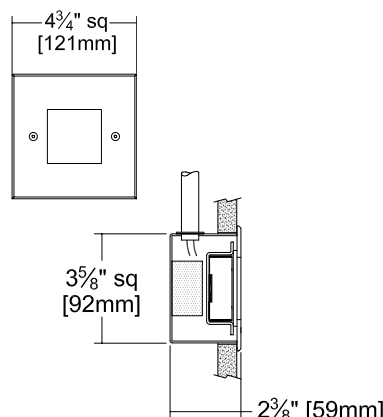

LED Filter Colors

