


CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

# Lighting for Patient Spaces

## Mini-Rectangle 3" x 5" Nightlight • LED

50,000 Hour Rated Life • Type IC • Optional LED Filter Colors

# MNT-03906

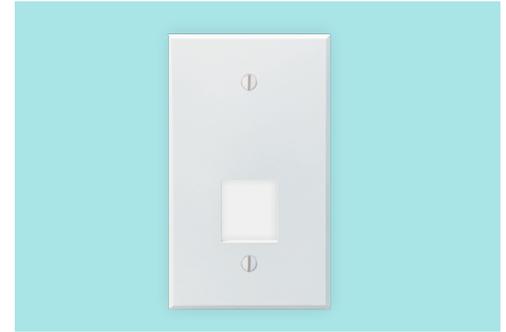

## Specifications

### LED

- White module (colored filters optional)
- 3500°K standard
- 4 system watts - energy efficient, uniform, cool

### LED Power Supply/Driver

- Max 13 volt DC and 4 watt fixed output; electronically stabilized
- Minimum operating temperature -4°F (-20°C)
- 120-277 volt standard; load insensitive

### Lens

Clear linear tempered glass lens sealed to trim

### Faceplate

- Rustproof aluminium trim
- White finish standard; optional colors
- Optional (white only) antimicrobial Kirlin BioGard™ finish; see Option-BG
- Secured to housing with two screws and captive nuts
- Removable for servicing

### Housing: Shallow 3½" Depth

- 2" x 3" x 3½" standard U. L. listed galvanized steel outlet box

### Installation

- Recesses indoor or outdoor, covered locations; versatile 3½" depth
- Mounting holes on top and bottom

### UL, C-UL (Canada) Listings

- Damp or dry locations
- Type IC; approved for direct contact with insulation

### FIVE YEAR Limited Warranty

- Complete standard fixture

## Options and Ordering Configuration


(Example: MNT-03906-BL-37-26)




Required	Optional			
Model	Voltage/Battery Pack	Filter Colors	Faceplate Finishes	Other Options
MNT-03906	<p><b>(Blank):</b> Universal 120-277 V</p> <p><b>-97:</b> Other voltage input; consult factory</p> <p><b>-EI:</b> Remote emergency inverter for 100% of rated lumens; Run time: 90+ minutes; 120 or 277V, 60Hz input only; specify voltage</p>	<p><b>(Blank):</b> None</p> <p><b>-BL:</b> Blue filter</p> <p><b>-GE:</b> Green filter</p> <p><b>-OR:</b> Orange filter</p> <p><b>-RA:</b> Red/Amber filter</p> <p><b>-YE:</b> Yellow filter</p> <p><b>-CF:</b> Custom color filter (Rosco); specify</p>	<p><b>(Blank):</b> Standard white finish</p> <p><b>-35:</b> Silver (natural aluminum) acrylic enamel</p> <p><b>-37:</b> Dark bronze acrylic enamel</p> <p><b>-38:</b> Black acrylic enamel</p> <p><b>-BG:</b> BioGard™ anti-microbial white</p> <p><b>-BKBG:</b> BioGard™ anti-microbial black</p> <p><b>-94:</b> Custom color; consult factory</p> <p><b>-94BG:</b> BioGard™ anti-microbial custom color finish</p>	<p><b>(Blank):</b> None</p> <p><b>-26:</b> Faceplate secured to housing with two center pin tamperproof screws; Tamperproof too included</p> <p><b>-99:</b> Special modification; consult factory</p>

## Performance

Footcandle Performance Opposite Fixture Installed Top View

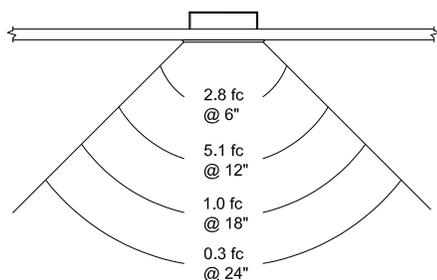

## Dimensions

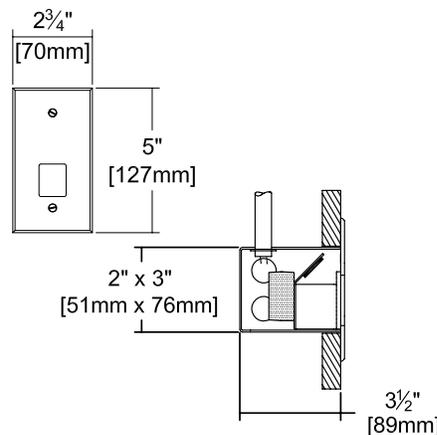

## LED Filter Colors

