

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

# Lighting for Patient Spaces

## Louvered 7" x 10" Nightlight • LED

Type IC • Optional LED Filter Colors

# MNT-07912



## Specifications

### LED

- White module (colored filters optional)
- 3500°K standard
- 5.5 system watts - energy efficient, uniform, cool
- 35 lumens typical

### LED Power Supply/Driver

- Max 13 volt DC and 4 watt fixed output; electronically stabilized
- Minimum operating temperature -4°F (-20°C)
- 120-277 volt standard; load insensitive

### Lens

- Diffuse acrylic lens behind louver

### Faceplate (Gasketed)

- Beveled and gasketed cast aluminum frame pulls tight to wall
- Die-formed and louvered aluminum door bolts tightly to frame with two flush mounted screws

- Gasketing between door and frame
- White finish standard; optional colors
- Optional (white only) antimicrobial Kirlin BioGard™ finish; see Option-BG
- Optional lens instead of louver available with all colors; see Option -17
- Tamper resistant available; see Option -26
- Optional hospital grade duplex receptacle, GFCI and push button on-off switch available; rated 120V only; must add Option -120

### Housing: Shallow 3" Depth

- Cool; acrylic enameled aluminum; Rustproof: Exceeds 1000 hour ASTM 5% salt spray test
- Dissipates heat across entire surface area
- Serviceable through removable door assembly

### Installation

- Recesses in wall indoor or outdoor, covered locations

- Mounting holes on housing ends

### UL, C-UL (Canada) Listings

- Damp or dry locations
- See Option -WL for wet locations
- Type IC; approved for direct contact with insulation

### FIVE YEAR Limited Warranty

- Complete standard fixture


## Options and Ordering Configuration

(Example: MNT-07912-BL-37-26)



Required	Optional				
Model	Voltage/Battery Pack	Filter Colors	Lens and Trim	Faceplate Finishes	Other Options
MNT-07912	<p><b>(Blank):</b> Universal 120-277 V</p> <p><b>-97:</b> Other voltage input; consult factory</p> <p><b>-120:</b> 120V (50-60Hz) input; required for Options -34, -GF or -HD</p> <p><b>-EI:</b> Remote emergency inverter for 100% of rated lumens; Run time: 90+ minutes; 120 or 277V, 60Hz input only; specify voltage</p> <p><b>-HW:</b> Higher light output; approximately doubles light output and system watts</p>	<p><b>(Blank):</b> None</p> <p><b>-BL:</b> Blue filter</p> <p><b>-GE:</b> Green filter</p> <p><b>-OR:</b> Orange filter</p> <p><b>-RA:</b> Red/Amber filter</p> <p><b>-YE:</b> Yellow filter</p> <p><b>-CF:</b> Custom color filter (Rosco); specify</p>	<p><b>(Blank):</b> None</p> <p><b>-17:</b> .220" polycarbonate and white acrylic behind diffusion layer, with door instead of louvers; not available with Option -PC</p> <p><b>-34:</b> With hospital grade push button on-off switch; indoor use; rated 120V only; must add Option -120; not available with Option -PC or -WL</p> <p><b>-GF:</b> With hospital grade duplex GFCI installed; indoor use; rated 120V only; must add Option -120; not available with Option -PC or -WL</p> <p><b>-HD:</b> With hospital grade duplex receptacle installed; indoor use; rated 120V only; must add Option -120; not available with Option -PC or -WL</p>	<p><b>(Blank):</b> Standard white finish</p> <p><b>-35:</b> Silver (natural aluminum) acrylic enamel</p> <p><b>-37:</b> Dark bronze acrylic enamel</p> <p><b>-38:</b> Black acrylic enamel</p> <p><b>-BG:</b> BioGard™ anti-microbial white</p> <p><b>-BKBG:</b> BioGard™ anti-microbial black</p> <p><b>-94:</b> Custom color; consult factory</p> <p><b>-94BG:</b> BioGard™ anti-microbial custom color finish</p>	<p><b>(Blank):</b> None</p> <p><b>-26:</b> Faceplate secured to housing with two center pin tamperproof screws; tamperproof tool included</p> <p><b>-99:</b> Special modification; consult factory</p> <p><b>-PC:</b> Photocell; nightlight will illuminate when room is dark; not available with Option -17 lens or switch and receptacle options</p> <p><b>WL:</b> UL Wet Location listed; not available with switch or receptacle options</p>

## Dimensions








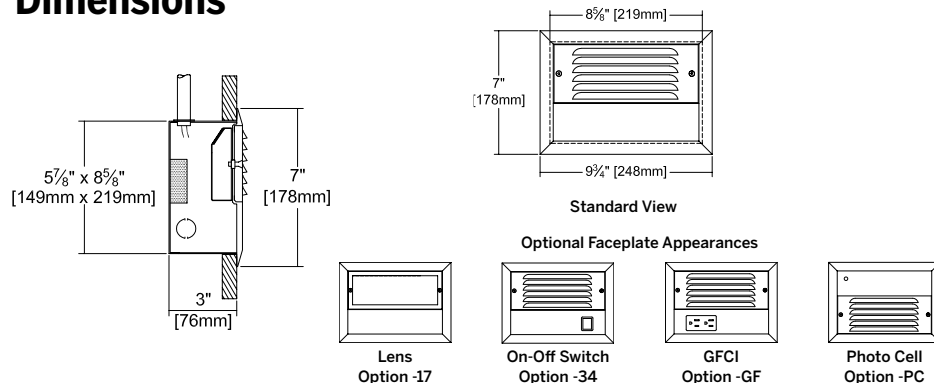


## LED Filter Colors



# Performance

Footcandle Performance On the Floor - Top View  
Photometry from I.T.L., Boulder, CO

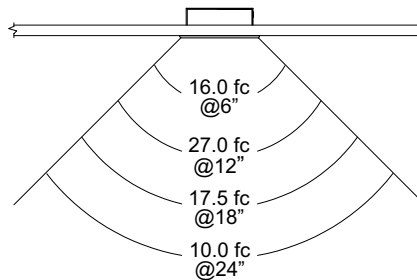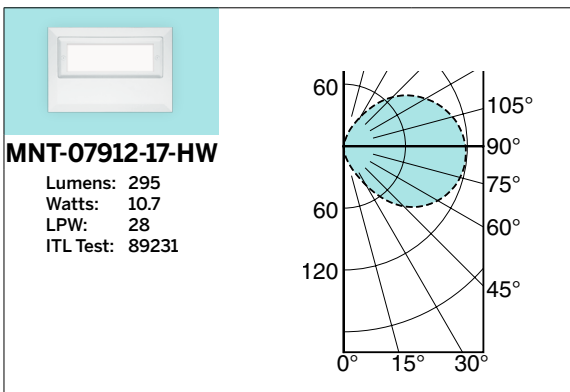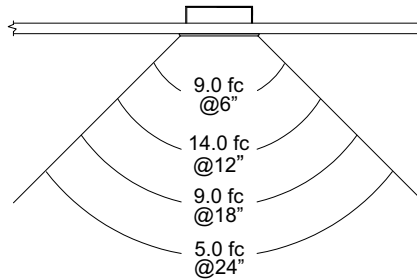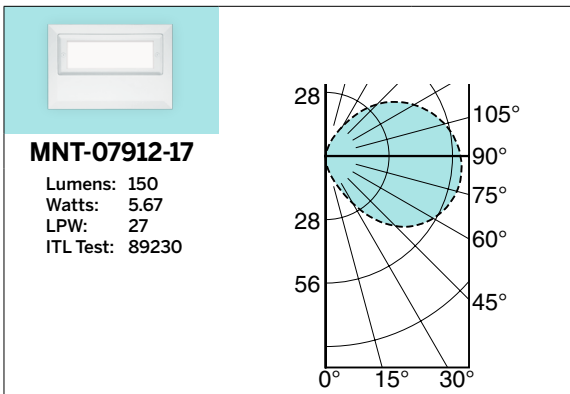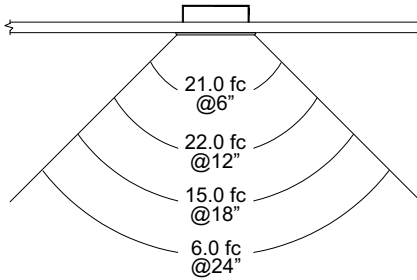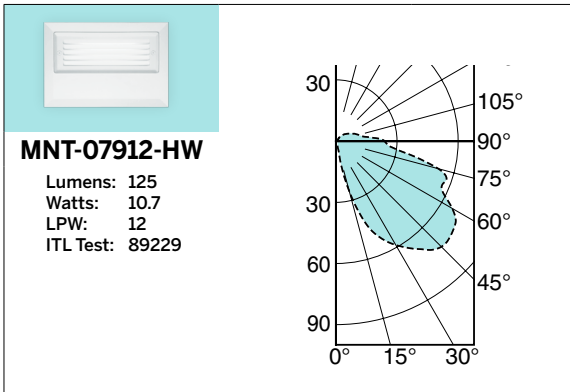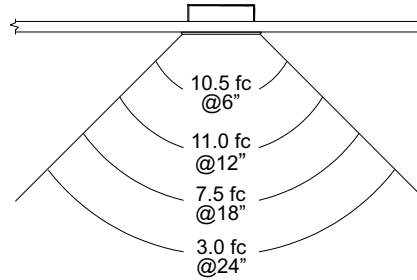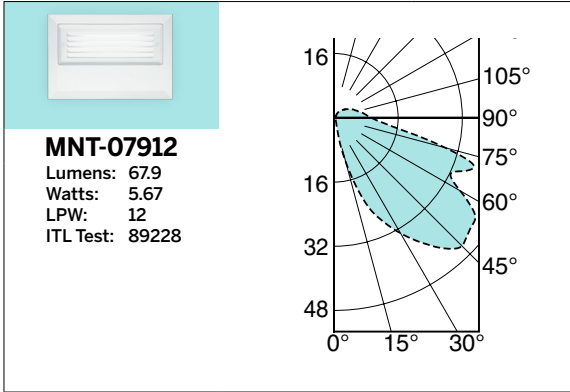

Also available in thru-the-wall version, see MNT-07914