

| | | |
|-----------|---------|---------|
| CATALOG # | TYPE | |
| JOB NAME | WATTAGE | VOLTAGE |

SmartLED™ MRI Lighting System

6" Open Appearance Downlight

Up to 60,000 Hour Life • Type IC

LM-80 Qualified • LM-79 Certified Photometry

Specifications

Delivered System Performance

- Lumens: **-2500L** (35W); 2500 nominal lumens
- Distribution: MFL standard; optional: -SPT, -NFL, or -WFL
- Color temperature: 3500°K standard; optional: -27K, -30K, -41K, or -50K
- CRI: 80+ standard; optional: -HC (90+)
- 60,000 hour life (L70)
- Fully sustainable: removable for servicing

Thermal Management System

- Aluminum heat sink and components for cool operation, long life, and low maintenance

SmartLED™ MRI Lighting System Required

- Kirlin remote driver modules, cabinet, and RFI filters required for operation
- Components ordered separately, see below for driver information and **MRI-CABNT** for additional components
- SmartLED driver modules provide 0-10V dimming to 0.38%

SmartLED™ Emergency Backup System

- **EMI-21220** or **EMI-03120** available for emergency power
- See specification sheet; order separately

Trim and Lens Assembly

- Clear specular aluminum self-flanged, low glare cone with lens above
- Optional colors and finishes available


Acrylic Enameled Aluminum Housing

- Rustproof and corrosion resistant: exceeds 1000 hour ASTM 5% salt spray test; all components fully sustainable
- Shallow depth for restricted plenums
- Cool operation extends component life
- Modular design; visible and fully serviceable through aperture
- Built-in plaster flange

Outlet Box (Aluminum)

- UL listed J-box; prewired with ½" knockouts

MRR-06420

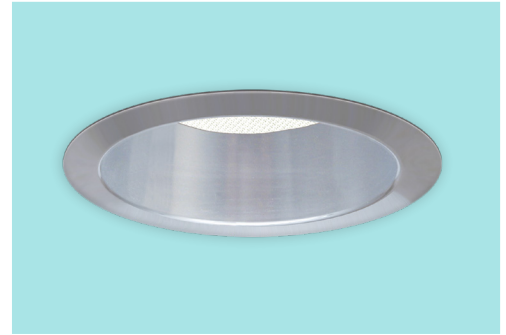

Installation & Hardware

- Requires minimum 18 AWG twisted pair shielded wire from SmartLED™ MRI Lighting System to fixtures
- Recesses in ceilings up to 1-1/8" thick or see Option -79
- Aluminum 27" hanger bars with adjustable mounting brackets (2) supplied.

UL, C-UL (Canada) Listings

- Wet, damp or dry locations, covered ceilings
- Type IC: for direct contact with insulation

IEC & FCC Compliance

- FCC Part 15 certified for EMI/RFI emissions

FIVE YEAR Limited Warranty

- Complete fixture, must be installed with all SmartLED™ components

Options and Ordering Configuration

(Example: MRR-06420-2500L-30K-NFL)

Made in the USA
BABAA Compliant


BioGard™
See Option -BGT

FCC Part 15
Certified

UL Listed
Wet, Damp, Dry

| Must Specify | | Optional | | | |
|--------------|--------|-----------------------|--------------|--|--|
| Model | Lumens | CCT & CRI | Beam | Trim & Lens Options | Other Options |
| MRR-06420 | -2500L | (Blank): 35K, 80+ CRI | (Blank): MFL | (Blank): Clear specular aluminum self-flanged downlight cone with lens above | (Blank): None |
| | | 80+ CRI | -SPT | Trim Finishes | Mounting |
| | | -27K: 2700°K | -NFL | -30T: All white acrylic enameled cone | -79: Extension collar; ceilings up to 2" thick |
| | | -30K: 3000°K | -MFL | -30F: White acrylic enameled cone flange | Other Options |
| | | -35K: 3500°K | -WFL | -70T: SofTex™ semi-specular clear self-flanged cone | -99: Special modification; consult factory |
| | | -41K: 4100°K | | -94: Custom color; consult factory | |
| | | -50K: 5000°K | | -BGT: BioGard™ anti-microbial white | |
| | | 90+ CRI | | Other Trim Features | |
| | | -27K-HC: 2700°K | | -32: White trim extender, specify OD | |
| | | -30K-HC: 3000°K | | -45: Gasket between trim flange and ceiling | |
| | | -35K-HC: 3500°K | | -46: Gasket between trim and lens | |
| | | -41K-HC: 4100°K | | Lens Options | |
| | | -50K-HC: 5000°K | | -WA: White acrylic (flat) diffuser instead; will produce wide flood distribution | |

Dimensions

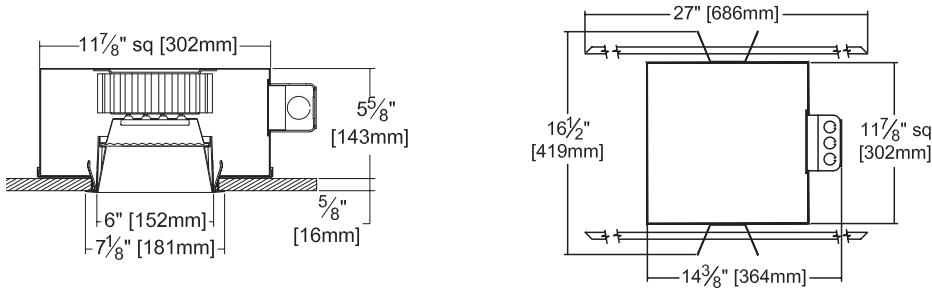


Ceiling Cut-out
 6 1/2" Dia.

Photometry - Installed Complete Fixture

LM-79 IESNA Certified Photometry from Independent Lab

Photometry from I.T.L., Boulder, CO

▲ **Cone of Light Key**
 Dia. (in ft.) shown is where FC value is half the FC at nadir.
Dist. Distance (Ft.) from fixture
FC Footcandles at nadir (0°)
Dia. Circle of light at 50% of FC

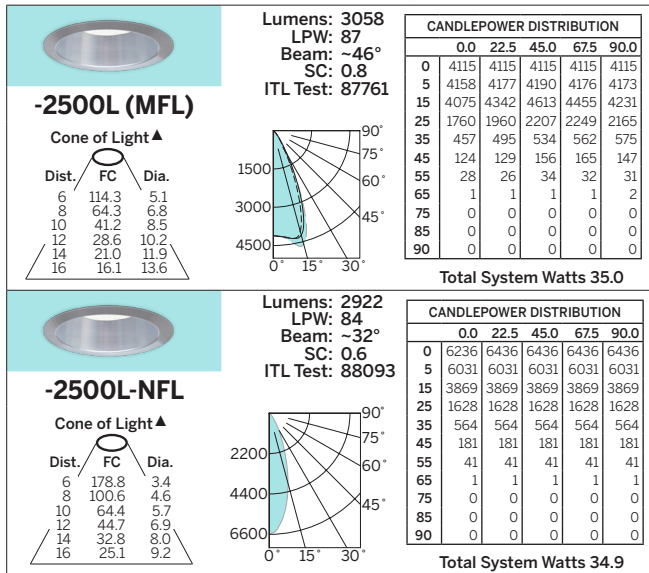

*LED manufacturers maintain a tolerance of +/-7% on flux (lumens) and power (electrical) measurements.

SmartLED™ MRI Driver Modules

Fully Digital Controlled Power Source for LED Luminaires

Mounted in Kirlin's **MRI-CABNT**



| Driver Module | Maximum Capacity | Fixture Load Example |
|---------------|------------------------|--------------------------|
| DVR-1400A | Qty 1: 2500L Luminaire | • Qty 1: MRR-06420-2500L |

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR TWO YEARS FROM DATE OF PURCHASE. INSTALLATION, IN NORMAL USE. Manufacturer at the option will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the offices of manufacturer within the warranty period. Liability of manufacturer is limited to the label for any other changes, direct or indirect, sustained or suffered by purchaser or any person. This warranty is applied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.