

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

SmartLED™ MRI Lighting System

6" Regress White Trim Lensed Downlight

Up to 60,000 Hour Life • Type IC

LM-80 Qualified • LM-79 Certified Photometry

MRR-06427



Specifications

Delivered System Performance

- Lumens: **-2500L** (35W); 2500 nominal lumens
- Distribution: MFL standard; optional: -SPT, -NFL, or -WFL
- Color temperature: 3500°K standard; optional: -27K, -30K, -41K, or -50K
- CRI: 80+ standard; optional: -HC (90+)
- 60,000 hour life (L70)
- Fully sustainable: removable for servicing

Thermal Management System

- Aluminum heat sink and components for cool operation, long life, and low maintenance

SmartLED™ MRI Lighting System Required

- Kirlin remote driver modules, cabinet, and RFI filters required for operation
- Components ordered separately, see below for driver information and **MRI-CABNT** for additional components
- The **MRI Configurator** can help determine the necessary components
- SmartLED driver modules provide 0-10V dimming to 0.38%

SmartLED™ Emergency Backup System

- **EMI-21220** or **EMI-03120** available for emergency power
- See specification sheet; order separately

Trim and Lens Assembly

- White finished (field paintable) aluminum self-flanged trim
- Regressed tempered prismatic spread lens

Acrylic Enameled Aluminum Housing

- Rustproof and corrosion resistant: exceeds 1000 hour ASTM 5% salt spray test; all components fully sustainable
- Shallow depth for restricted plenums
- Cool operation extends component life
- Modular design; visible and fully serviceable through aperture
- Built-in plaster flange

Outlet Box (Aluminum)

- UL listed J-box; prewired with ½" knockouts

Installation & Hardware

- Requires minimum 18 AWG twisted pair shielded wire from SmartLED™ MRI Lighting System to fixtures
- Recesses in ceilings up to 1-1/8" thick or see Option -79
- Aluminum 27" hanger bars with adjustable mounting brackets (2) supplied.

UL, C-UL (Canada) Listings

- Wet, damp or dry locations, covered ceilings
- Type IC: for direct contact with insulation

IEC & FCC Compliance

- FCC Part 15 certified for EMI/RFI emissions

FIVE YEAR Limited Warranty

- Complete fixture, must be installed with all SmartLED™ components




Options and Ordering Configuration

(Example: MRR-06427-2500L-30K-NFL)

Must Specify		Optional			
Model	Lumens	CCT & CRI	Beam	Trim & Lens Options	Other Options
MRR-06427	-2500L	(Blank): 35K, 80+ CRI	(Blank): MFL	(Blank): White self-flanged downlight cone with lens above	(Blank): None
		80+ CRI	-NFL	Trim Finishes	Mounting
		-27K: 2700°K	-MFL	-BGT: BioGard anti-microbial white	-79: Extension collar; ceilings up to 2" thick
		-30K: 3000°K	-WFL	-BKBG: BioGard anti-microbial black	Other Options
		-35K: 3500°K		-94: Custom color; consult factory	-99: Special modification; consult factory
		-41K: 4000°K		-94BG: BioGard anti-microbial custom color finish	
		-50K: 5000°K		Other Trim Features	
		90+ CRI		-32: White trim extender, specify OD	
		-27K-HC: 2700°K		-45: Gasket between trim flange and ceiling	
		-30K-HC: 3000°K		-46: Gasket between trim and lens	
		-35K-HC: 3500°K		Lens Options	
		-41K-HC: 4000°K		-WA: White acrylic (flat) diffuser instead; will produce wide flood distribution	
		-50K-HC: 5000°K			

Dimensions

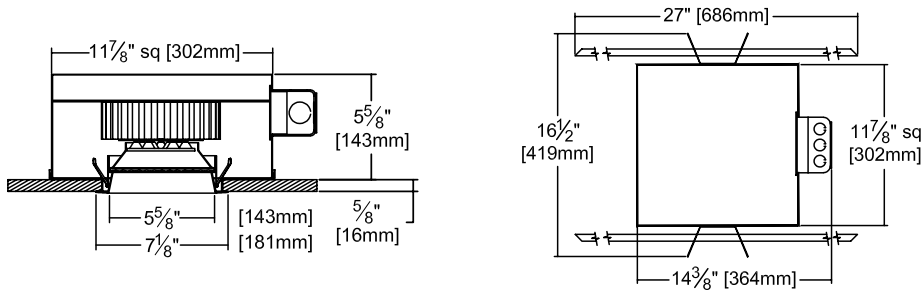

Ceiling Cut-out
 6 1/2" Dia.

Photometry - Installed Complete Fixture

LM-79 IESNA Certified Photometry from Independent Lab

Photometry from UL Verification Services, Allentown, PA

▲ Cone of Light Key
 Dia. (in ft.) shown is where FC value is half the FC at nadir.
 Dist. Distance (Ft.) from fixture
 FC Footcandles at nadir (0°)
 Dia. Circle of light at 50% of FC

