

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

# Lighting for Patient Spaces

## 2'x 2' Recessed White or Scenic Panel

Ligature & Vandal Resistant • Soothing & Safe "Skylight" Effect  
Up to 60,000 Hour Life • 90 CRI

## Specifications

### Delivered System Performance

- Lumen Series: **MUST SPECIFY**  
-2500L (35W) - Not available with images  
-1500L (20W)
- Color temperature: **MUST SPECIFY**  
3500°K or 4100°K
- Distribution: WFL
- 90 CRI; 60,000 hour life (L70)

### Thermal Management System

- Heavy gauge aluminum construction provides maximum heat dissipation for cool LED operation; extends life of all components

### LED Driver - INTERNAL

- Indoor/Outdoor: -30°C to 60°C (-22°F to 140°F)
- 0-10V 1.0% dimming standard
- Voltage: 120-277/50-60Hz; load insensitive
- Enclosed in aluminum housing

### IK10 Trim/Lens - Ligature/Vandal Resistant

- Single-piece, rigid tempered heavy gauge

6063-T5 aluminum frame with seam welded corners and keys

- Rustproof and corrosion resistant
- BioGard™ antimicrobial white finish
- Flush center pin tamperproof screws; tamperproof tool included
- High strength clear flat polycarbonate (0.220") - environmental side
- Extruded acrylic wave guide provides unparalleled uniformity

### Scenic Panel Image (Optional)

- Acrylic scenic panel (Over 100 selections from Kirlin or customer-provided) above polycarbonate
- Easily changed without replacing luminaire for a cost-effective interior design update
- Visualize your design with Kirlin's **Scenic Configurator** tool

### Outlet Box (Galvanized)

- UL listed J-box; prewired 16 GA steel with ½" knockout

## MRV-22865



### Installation & Hardware

- Recessed mount for drywall ceilings (structural blocking required - by others)
- Shallow 2⅜" recessed depth to minimize plenum interference

### UL, C-UL (Canada) Listings

- Wet, damp or dry locations, covered ceilings

### FCC Compliance



- FCC Part 15 certified for EMI/RFI emissions

### FIVE YEAR Limited Warranty

- Complete standard fixture



## Dimensions

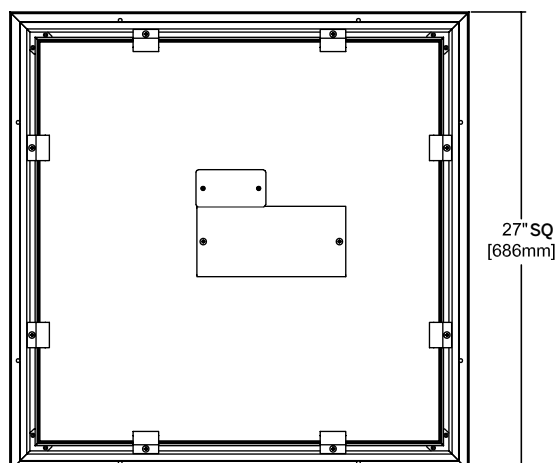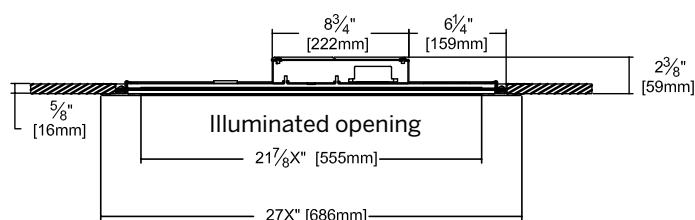

Ceiling Cut-out  
25 ⅞" SQ.

2x2 Recessed Panel Ordering Configuration

(Example: MRV-22865-1500L-41K-IMG)

Must Specify			Optional			
Model	Lumens	CCT & CRI	Image	Driver Options	Trim Finish	Other Options
MRV-22865						
	-2500L† -1500L	(Blank): 35K, 90+ CRI  -35K: 3500K -41K: 4000K	(Blank): White Panel  -IMG: Scenic Panel; N/A with -2500L  Choose the image desired from the <a href="#">Scenic Image Gallery</a> brochure; Order the scenic image separately	(Blank): 0-10V 1.0% dimming  -D6: Triac 100-10% dimming instead	(Blank): White BioGard™ anti-microbial finish  -BKBG: BioGard™ anti-microbial black  -94: Custom color/finish; see page 4 for recommended custom colors; consult factory  -94BG: BioGard™ anti-microbial custom color finish	(Blank): None  -99: Special modification; consult factory
	† 2500L not available with images					



Scenic Image Ordering Configuration

(Example: MRP-22IMG-2X2-SKY10)

Must Specify			Options
Model	Size	Image	Other Options
MRP-22IMG			
	-2X2: 1 panel	Choose the image desired from the <a href="#">Scenic Image Gallery</a> brochure and insert the code here. To see how your artwork will appear in an arrangement, visit Kirlin's <a href="#">Scenic Configurator</a> tool.  -IMG99: Custom image†  † See requirements on page 5	(Blank): None  -99: Special modification; consult factory  If ordering a -PAT image, choose the pattern color desired from the <a href="#">Scenic Image Gallery</a> brochure and insert the code here.
	See the next page for additional layout and orientation details.		

Photometry - Installed Complete Fixture

LM-79 IESNA Certified Photometry from Independent Lab

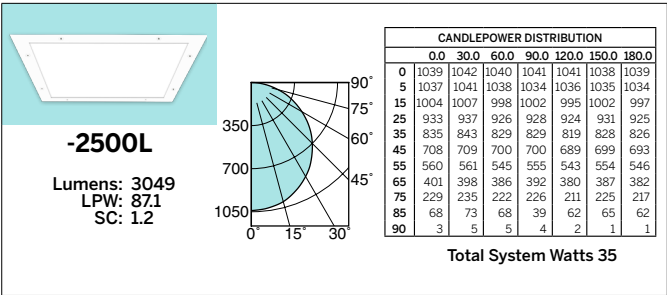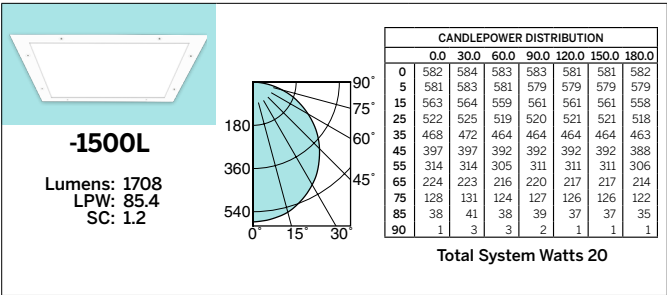

LED manufacturers maintain a tolerance of +/-7% on flux (lumens) and power (electrical) measurements.

## Scenic Panel Options



### Image Gallery

- Sky (SKY) - 25 Images
- Night Sky (NGT) - 7 Images
- Space (SPC) - 4 Images
- Tree (TRE) - 22 Images
- Nature Landscape (LND) - 8 Images
- Water (WTR) - 5 Images
- Abstract Art (ART) - 10 Images
- Patterns (PAT) - 25 Patterns

LIMITED WARRANTY: KIRLIN EXTLITES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR FIVE YEARS FROM DATE OF PURCHASE. INSTALLATION, E.G., IN NORMAL USE. Manufacturer at his option will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture within the years of original shipment. Liability of manufacturer is limited to the foregoing and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.

PATENT SPACES  
March 2025


## Recommended Custom Colors

The below colors match Kirlin's Scenic Patterns for a cohesive look throughout the space.  
To be used with option code -94.

### Calming Colors




Pale Marigold (-94PM)




Peaceful Pine (-94PP)



Moonlit Bay (-94MB)



Dreamy Dusk (-94DD)



Mudstone Magic (-94MM)




Soft Slate (-94SS)


### Vibrant Colors



Electric Ember (-94EE)



Hot Orchid (-94HO)



Lemon Zing (-94LZ)




Kiwi Kick (-94KK)



Caribbean Lagoon  
(-94CL)



Cerulean Wave (-94CW)



Glam Grape (-94GG)

Due to variations in monitor settings and screen resolutions, the appearance of colors, textures, and details in the images may differ from the actual product.