

CATALOG #	TYPE
JOB NAME	WATTAGE VOLTAGE

7" x 10" 1 Quad 13 WATT MAXIMUM

RN00870

## Compact Fluorescent Louvered NightLight

### Specifications

#### Lamp

- Designed for one 4-pin quad compact fluorescent lamp: 13W quad.

#### Ballast: Multi-Voltage

- Installed electronic high power factor, thermally protected. For 9W twin see Option -43.
- 120-277 multi-volt; 50/60 Hz THD < 10%.
- ClickQuick connectors for easy service.
- Cold weather: -22°F (-30°C).
- End of lamp life protection circuit, RF filter.
- Internally fused. Also see Option -FS.

#### Reflector

- Full size white 85% (min.) reflectivity.

#### Lens

- .220" clear polycarbonate behind louver.

#### Trim Assembly

- Attractively beveled and gasketed cast aluminum frame pulls tight to wall.
- Die-formed and louvered aluminum door bolts tightly to frame with two flush mounted screws.
- Gasketing between door and frame.

- White finish standard. Optional colors.
- Optional lens (-17) instead of louver available.
- Tamper resistant available. See Option -26.
- Optional hospital grade duplex receptacle, GFCI and push button on-off switch available.

#### Aluminum Housing

- Acrylic enameled. Rustproof. Exceeds 1000 hour ASTM 5% salt spray test.
- Serviceable through removable door and frame.
- Cool operation: Extends component life.

#### Installation

- Recesses in wall indoor or outdoor, covered locations. Min. operating temp. -22°F (-30°C).
- Eight 1/2" T.S. (7/8" dia.) wiring KO's.
- Mounting holes provided on top, bottom and ends for direct mounting to masonry or steel studs.


#### UL, C-UL (Canada) Listings

- Wet (with restrictions)†, damp or dry locations.
- Type IC. Approved for direct contact with insulation.

#### Three Year Limited Warranty


- Complete standard fixture and ballast.

† UL damp or dry locations ONLY with all switch and receptacle Options.




Recessed  
Rectangular  
Louvered Type IC  
NightLight

### Performance at a Glance

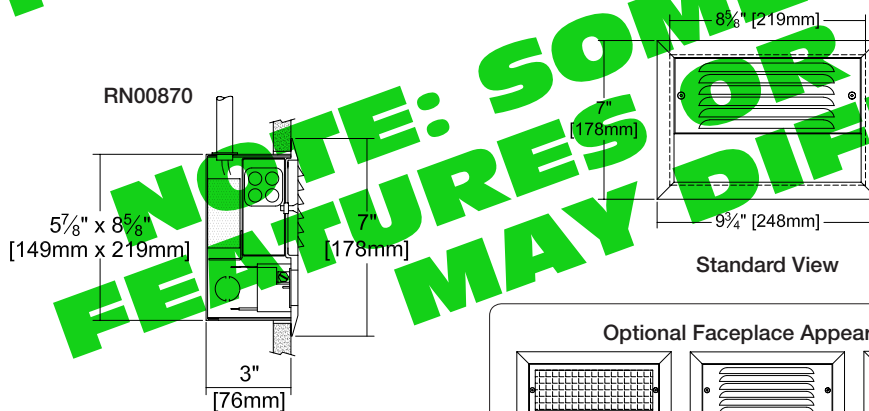

Standard View

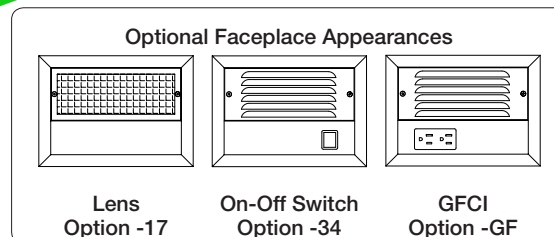


Lens  
Option -17

On-Off Switch  
Option -34

GFCI  
Option -GF

RN00870 (1 Quad 13W)



## THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232  
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • [www.kirlinlighting.com](http://www.kirlinlighting.com)

PATIENT EXAM &  
HEALTHCARE LIGHTING

MAXIMUM WATTAGE

1 Quad 13

CATALOG NUMBER

RN00870

DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

## Options

‡ Note: UL Damp or Dry Locations only with all switch and receptacle Options.

### Wattage and Voltage

- 43 Lower wattage: for 4-pin 9W twin.
- 97 Specify other voltage. Consult factory.
- 98 347 volt, 50/60 Hz. input. Consult factory.

### Lenses and Trims

- 17 Prismatic high strength acrylic lens with door instead of louvers.
- 26 Tamper-resistant flush mounted door screws and key.
- 34 With hospital grade push button on-off switch. Indoor use.
- GF With duplex hospital grade GFCI installed. Indoor use.
- HD With duplex hospital grade receptacle installed. Indoor use.

### Luminaire (Faceplate) Finishes

- 35 Natural aluminum acrylic enamel.
- 36 Gold acrylic enamel.
- 37 Dark Bronze acrylic enamel.
- 38 Black acrylic enamel.
- 94 Custom color/finish. Specify. Consult factory.

### Other

- 99 Special modification. Consult factory.
- FS Additional in-line fuse.
- LE With 4-pin electronic lamp. 3500°K standard, 82 CRI and 12,000 hour life. Specify wattage, style and color temperature.

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME

TYPE

WATTAGE

VOLTAGE

CATALOG NUMBER

**THIS FIXTURE IS NO LONGER AVAILABLE FOR AN ALTERNATIVE FIXTURE PLEASE SEE FIXTURE RN00869**

**NOTE: SOME DESIGN FEATURES OR OPTIONS MAY DIFFER**

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE, INSTALLED TO N.E.C. IN NORMAL USE. Manufacturer at the option will replace or repair each fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the office of manufacturer within three years of original shipment. Liability of manufacturer is limited to the foregoing, and shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.