

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

7" x 10" 2 Quad 13 WATT MAXIMUM

RN00871

## Thru-the-Wall NightLight

### Specifications

#### Lamp and Ballast

- Designed for two 4-pin quad 13W compact fluorescent lamps.
- Installed electronic high power factor, thermally protected.
- 120-277 multi-volt; 50/60 Hz. THD < 10%.
- ClickQuick connectors. Single circuit wiring.
- Cold weather -22°F (-30°C). End of lamp life protection circuit. RFI filter.
- Internally fused. Also see Option -FS.

#### Lenses Behind Louvers (Gasketed)

- Clear .220" polycarbonate.
- Prevents sound transmission between rooms.

#### Trim Assemblies - Both Sides (Gasketed)

- Attractively beveled and gasketed cast aluminum frame pulls tight to wall. White finish standard.
- Die-formed and louvered aluminum door bolts tightly to frame with two flush mounted screws.
- Tamper resistant available. See Option -26.

- Optional lens, hospital grade duplex receptacle, GFCI and push button on-off switch available. Rated 120V only. Must add Option -120.

#### Housing

- Cool. Acrylic enameled aluminum. Rustproof.
- Exceeds 1000 hour ASTM 5% salt spray test.
- Dissipates heat across entire surface area.
- Serviceable through removable door assembly.

#### Installation


- Recesses indoors or outdoors, covered locations.
- Minimum operating temperature: -22°F (-30°C).
- Adjusts to walls from 4-3/8" to 5-1/4" thick.
- Mounting holes provided on top, bottom and ends for mounting to masonry or steel studs.

#### UL, C-UL (Canada) Listings

- Damp or dry locations, covered ceilings.
- Type IC. Approved for direct contact with insulation.



#### Three Year Limited Warranty

- Complete standard fixture (and ballast).

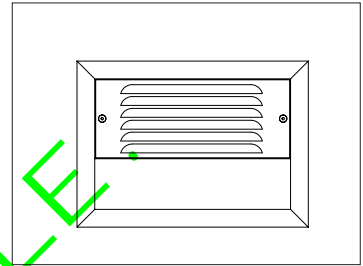


Thru-the-Wall  
Rectangular  
Louvered Type IC  
NightLight

### Performance at a Glance

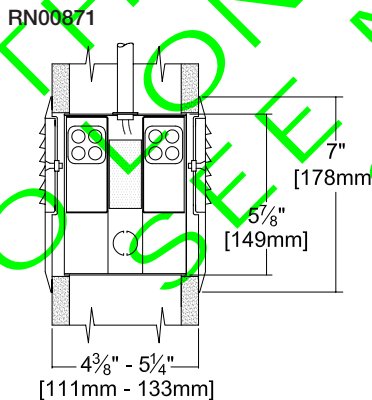


Standard View

#### Optional Faceplate Appearances




Lens  
Option -L1, -L2



GFCI  
Option -G1, -G2

RN00871 (2 Quad 13W)



## THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232  
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • [www.kirlinlighting.com](http://www.kirlinlighting.com)

PATIENT EXAM &  
HEALTHCARE LIGHTING

MAXIMUM WATTAGE

2 Quad 13

CATALOG NUMBER

RN00871

DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

Options

Wattage and Voltage

- 43 Lower wattage. For 4-pin 9W twin.
- 84 Wired for two circuits. Also see -FD.
- 97 Specify other voltage. Consult factory.
- 98 347 volt, 50/60 Hz. input. Consult factory.
- 120 120V (50-60 Hz) input. Required for Options -G1, -G2, -H1, -H2 or -S1.
- EI Remote emergency inverter for 100% of rated lumens. Run time: 90+ minutes. 120 or 277V, 60 Hz input only. Specify voltage.

Lenses and Trims

- 26 Tamper-proof flush mounted door screws.
- G1 With duplex hospital grade GFCI installed on one side. White. Indoor use. Rated 120V only. Must add Option -120.
- G2 With duplex hospital grade GFCI installed on both sides. White. Indoor use. Must add Option -120.
- H1 With duplex hospital grade receptacle on one side. White. Indoor use. Must add Option -120.
- H2 With duplex hospital grade receptacle on both sides. White. Indoor use. Must add Option -120.
- L1 .187" high strength acrylic prismatic lens and door instead on one side. Louvers on other side.
- L2 .187" high strength acrylic prismatic lens and door instead on both sides.
- S1 With hospital grade push button on/off switch installed on one side. Controls both lamps. Indoor use. Must add Option -120.

Luminaire (Faceplate) Finishes

- 35 Natural aluminum acrylic enamel.
- 37 Dark Bronze acrylic enamel.
- 38 Black acrylic enamel.
- 94 Custom color/finish. Specify. Consult factory.

Other

- 99 Special modification. Consult factory.
- FD Two additional in-line fuses. One per ballast. Use with Option -84. Not available with Option -98(347V).
- FS Additional in-line fuse. Not available with Option -98(347V).
- LE With 4-pin electronic lamp, 3500°K standard. 82 CRI and 12,000 hour life. Specify wattage, style and color temperature.

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME  
TYPE  
WATTAGE  
CATALOG NUMBER

VOLTAGE

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALLED TO N.E.C. IN NORMAL USE. Manufacturer at the option will replace or repair each fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the office of manufacturer within three years of original shipment. Liability of manufacturer is limited to the foregoing, and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer, will render the warranty void.