


CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

5" LED RR00583

## LED Eyelid NightLight

50,000 Hour Rated Life

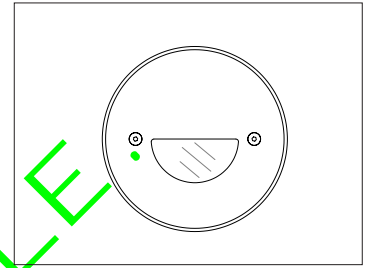

### Specifications

#### LED

- White module (colored filters optional).
- 3500°K standard.
- 6 system watts - energy efficient, uniform, cool.

#### LED Power Supply / Driver

- 10 volt DC. Electronically stabilized.
- Minimum operating temperature -13°F (-25°C).
- 120-277 volt standard. Load insensitive.

#### Lens (Gasketed)

- Tempered microprismatic glass.
- For vandal resistant version see Option -26.
- Gasketing between lens and faceplate.

#### Faceplate (Gasketed)

- Gasketed rustproof aluminum trim.

- White finish standard. Optional colors.
- Secured to housing with two screws and captive nuts.
- For fastener free faceplate, see Option -FF.
- For vandal resistant version see Option -26.
- Removable for servicing.

#### Housing: Shallow 2 1/4" depth

- 4" x 2 1/4" standard U. L. listed octagon galvanized steel outlet box.

#### Installation

- Recesses indoors or outdoors, covered locations. Versatile 2-1/4" depth.
- Mounting holes on top, bottom and ends.


#### UL, C-UL (Canada) Listings

- Damp or dry locations.
- **5 Year Limited Warranty**
- Complete standard fixture.


Recessed  
"Half Round"  
LED  
NightLight

### Performance at a Glance

RR00583

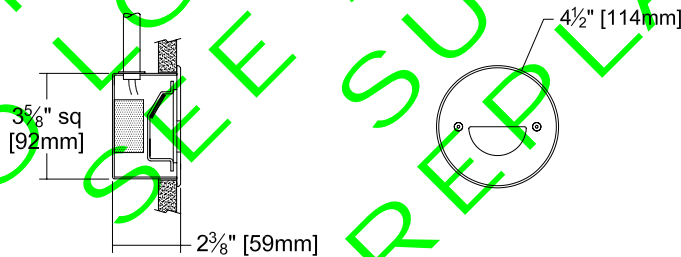

Footcandle Performance On the Floor - Top View  
(Installed 14" above finished floor.)

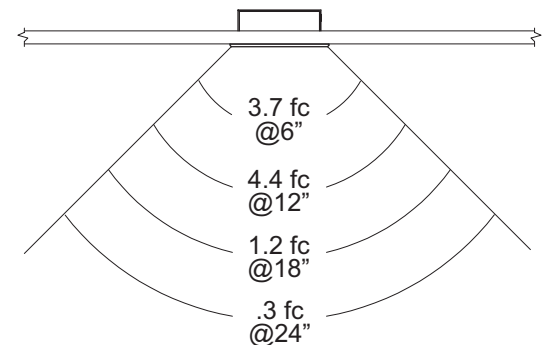

## THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232  
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

PATIENT EXAM &  
HEALTHCARE LIGHTING

MAXIMUM WATTAGE

LED

CATALOG NUMBER

RR00583

DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

### Options

#### Voltage / Battery Pack

- 97 Other voltage input. Consult factory.
- EI Remote emergency inverter for 100% of rated lumens. Run time: 90+ minutes. 120 or 277V, 60 Hz input only. Specify voltage.

#### LED Filter Colors

- BL Blue filter.
- GE Green filter.
- OR Orange filter.
- RA Red/Amber filter.
- YE Yellow filter.
- CF Custom color filter (Rosco). Specify.

#### Faceplate Finishes

- 35 Natural Aluminum (silver) acrylic enamel.
- 37 Dark Bronze acrylic enamel.
- 38 Black acrylic enamel.
- 94 Custom color/finish. Specify. Consult factory.

#### Other

- 26 Faceplate secured to housing with two center pin tamperproof screws. 1/8" clear polycarbonate lens will be added. Tamperproof tool included.
- 99 Special modification. Consult factory.
- FF Fastener free faceplate / trim. No visible hardware.

NO THIS PRODUCT IS NO LONGER AVAILABLE. SEE MNR-05900 AS SUGGESTED REPLACEMENT

### SUBMITTAL DATA

### APPROVAL STAMP

JOB NAME \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 WATTAGE \_\_\_\_\_ VOLTAGE \_\_\_\_\_  
 CATALOG NUMBER \_\_\_\_\_

LIMITED WARRANTY: CATALOGUED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALLED TO N.E.C. IN NORMAL USE. Manufacturer at its option will replace or repair each fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the office of manufacturer within three years of original shipment. Liability of manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied in the box in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.