


CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

3" x 7" LED

RS00572

LED Super Shallow Lensed StepLight

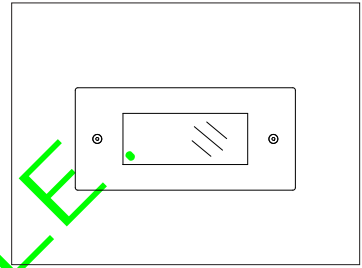

Specifications

LED

- White module (colored filters optional).
- 3500°K standard.
- 5.5 system watts - energy efficient, uniform, cool.

LED Power Supply / Driver

- Max 13 volt DC and 4 watt fixed output. Electronically stabilized.
- Minimum operating temperature -4°F (-20°C).
- 120-277 volt standard. Load insensitive.

Lens

- Translucent white 1/8" polycarbonate sealed to trim.

Trim Assembly

- Gasketed aluminum frame pulls tight to wall.
- White finish standard. Optional colors.

- Tamper resistant available. See Options.
- **Housing: Super Shallow 2½" Depth**
- Cool. Acrylic enameled aluminum. Rustproof: Exceeds 1000 hour ASTM 5% salt spray test.
- Dissipates heat across entire surface area.
- Frame removable for servicing.

Installation


- Recesses in wall indoor or outdoor, covered locations.
- Mounting holes provided on housing ends.

UL, C-UL (Canada) Listings



- Damp or dry locations, covered ceilings.

5 Year FIVE YEAR Limited Warranty

- Complete standard fixture.

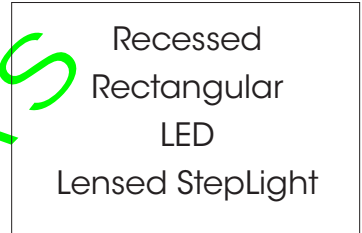

Dimensions

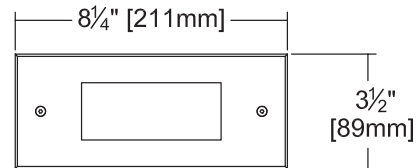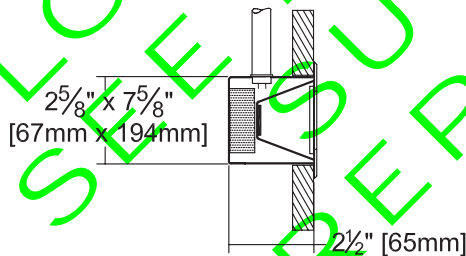

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
 (313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

PATIENT EXAM &
HEALTHCARE LIGHTING

MAXIMUM WATTAGE

LED

CATALOG NUMBER


RS00572

DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

Performance

Footcandle Performance On the Floor - Top View
Photometry from I.T.L., Boulder, CO

RS00572
ITL Test: 89230

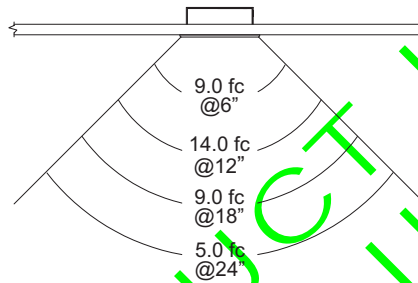

Options

Voltage / Battery Pack

- 97 Other voltage input. Consult factory.
- EI Remote emergency inverter for 100% of rated lumens. Run time: 90+ minutes. 120 or 277V, 60 Hz input only. Specify voltage.

LED Filter Colors

- BL Blue filter.
- GE Green filter.
- OR Orange filter.
- RA Red/Amber filter.
- YE Yellow filter.
- CF Custom color filter (Rosco). Specify.

Other

- 26 Faceplate secured to housing with two center pin tamperproof screws. Tamperproof tool included.
- 99 Special modification. Consult factory.

Faceplate Finishes

- 35 Silver (natural aluminum) acrylic enamel.
- 37 Dark Bronze acrylic enamel.
- 38 Black acrylic enamel.
- 94 Custom color finish. Specify. Consult factory.
- BG Anti-microbial Kirlin BioGard™ white (only) faceplate finish.

NO THIS PRODUCT IS AVAILABLE. SUGGESTED AS REPLACEMENT.

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME

TYPE

WATTAGE

VOLTAGE

CATALOG NUMBER

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALLATION TO N.E.C. IN NORMAL USE. Manufacturer at its option will repair or replace each fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the office of manufacturer within three years of original shipment. Liability of manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied in the box in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.