


CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

5" x 5" LED

RS00585

LED Rectangle NightLight

50,000 Hour Rated Life

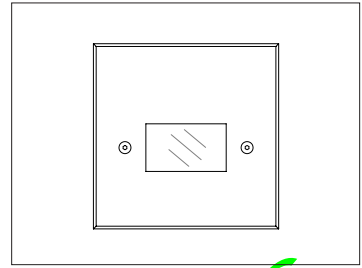

Specifications

LED

- White module (colored filters optional).
- 3500°K standard.
- 6 system watts - energy efficient, uniform, cool.

LED Power Supply / Driver

- 10 volt DC. Electronically stabilized.
- Minimum operating temperature -13°F (-25°C).
- 120-277 volt standard. Load insensitive.

Lens (Gasketed)

- Tempered microprismatic glass.
- For vandal resistant version see Option -26.
- Gasketing between lens and faceplate.

Faceplate (Gasketed)

- Gasketed rustproof aluminum trim.
- White finish standard. Optional colors.

- Secured to housing with two screws and captive nuts.
- For vandal resistant version see Option -26.
- Removable for servicing.

Housing: Shallow 2-1/4" depth

- 4" x 4" x 2-1/4" standard U. L. listed octagon galvanized steel outlet box.

Installation

- Recesses indoors or outdoors, covered locations. Versatile 2-1/4" depth.
- Mounting holes on top, bottom and ends.

UL, C-UL (Canada) Listings


- Damp or dry locations.

5 Year Limited Warranty


- Complete standard fixture.

Performance at a Glance

RS00585



Footcandle Performance On the Floor - Top View
(Installed 14" above finished floor.)

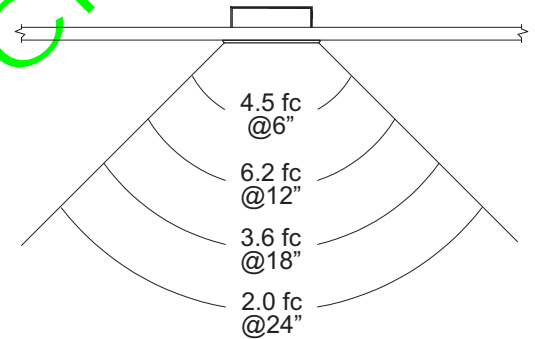

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

PATIENT EXAM &
HEALTHCARE LIGHTING

MAXIMUM WATTAGE

LED

CATALOG NUMBER

RS00585

DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

Options

Voltage / Battery Pack

- 97 Other voltage input. Consult factory.
- EI Remote emergency inverter for 100% of rated lumens. Run time: 90+ minutes. 120 or 277V, 60 Hz input only. Specify voltage.

LED Filter Colors

- BL Blue filter.
- GE Green filter.
- OR Orange filter.
- RA Red/Amber filter.
- YE Yellow filter.
- CF Custom color filter (Rosco). Specify.

Faceplate Finishes

- 35 Natural Aluminum (silver) acrylic enamel.
- 37 Dark Bronze acrylic enamel.
- 38 Black acrylic enamel.
- 94 Custom color/finish. Specify. Consult factory.

Other

- 26 Faceplate secured to housing with two center pin tamperproof screws. 1/8" clear polycarbonate lens will be added. Tamperproof tool included.
- 99 Special modification. Consult factory.
- FF Fastener free faceplate / trim. No visible hardware.

THIS FIXTURE HAS BEEN REDESIGNED BY MNS-0004 SOME DESIGN FEATURES MAY HAVE CHANGED

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME

TYPE

WATTAGE

VOLTAGE

CATALOG NUMBER

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE MANUFACTURED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALLED TO N.E.C. IN NORMAL USE. Manufacturer at its option will replace or repair each fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the office of any distributor within three years of original shipment. Liability of manufacturer is limited to the foregoing, and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied in the box in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.