

FOR POURED CONCRETE CEILINGS

SPREAD DISTRIBUTION "K" LENS

12"

Features

Lamp

- Designed for horizontal 300 watt maximum PS25.

Socket

- Horizontal. Medium base.
- Glazed porcelain.
- Nickel-plated brass screw shell. Silicone leads.

Reflector

- GlasSurfaced™ multi-faceted specular aluminum.

Trim Assembly

- Tempered prismatic shock-resisting spread Kirlin lens. Fully gasketed.
- Rust-free polished nickel stainless door (304-L) and captive thumb screw. Slender with concealed hinges for fast relamping.
- Attractively beveled cast aluminum frame tooled to ensure close fit with door. White acrylic finish. Fully gasketed.
- Tamper-proof vandal resistant door screw available (Option -26).
- Tempered low brightness prismatic flat glass (Option -15) or Drop Holophane tempered lens available (Option -DH). Also see Options.

Housing

- 16 GA. galvanized steel; red oxide rustproof primer coat with black enamel finish.
- Entire luminaire serviced through removable trim assembly.

Outlet Box

- Prewired 14 GA (NEC) galvanized steel, UL listed.
- Removable insulated cover.
- 1/2" and 3/4" knockouts.

Installation

- Recesses indoor or outdoor in poured concrete ceilings. 90°C feed wire needed.

UL, C-UL (Canada) Listings


- For use in poured concrete ceilings.
- Through-branch circuit conductors (6 #12).

Three Year Limited Warranty



- Complete standard fixture.

Thermal Protection

- Per current NEC.

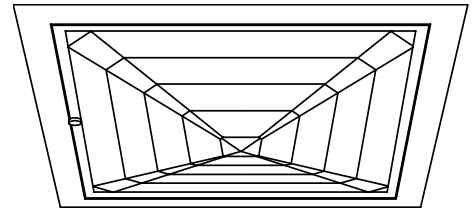

APPROVAL STAMP

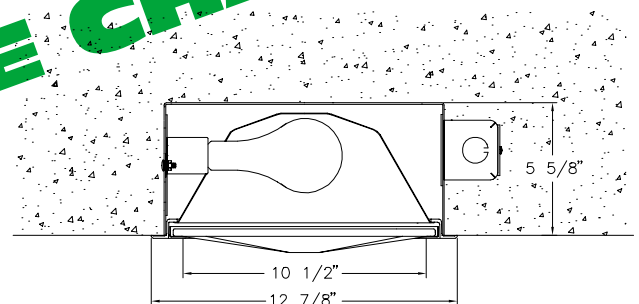

Options

- | | | |
|--|--|--|
| -14 Drop opal lens. | -27 Clear 1/4" tempered glass beneath prismatic flat C#73 lens for vandal resistance. Also see Option -26. | -94 Custom color frame. Consult factory. |
| -15 Tempered low brightness prismatic flat C#73 glass instead. | -35 Silver enameled frame finish instead. | -99 Special modification. Consult factory. |
| -18 Anopal flat glass. | -36 Gold enameled frame finish instead. | -DG Drop Guard with prismatic glass; protects against thrown objects. Galvanized steel. White acrylic finish with tempered flat prismatic glass. |
| -19 Offset lamp position instead. | -37 Bronze enameled frame finish instead. | -DH Drop Holophane tempered lens instead. |
| -26 Tamper-proof recessed hex, center pin, | -38 Black enameled frame finish instead. | -LP With lamp. Specify wattage. |
| button door screw with key. One key provided/ten fixtures. See also -27. | | |

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
(313) 259-6400 • FAX: (313) 259-9409 or (313) 259-3121 • www.kirlinlighting.com

LAMP

MAXIMUM WATTAGE

CATALOG NUMBER

**INCANDESCENT
LIGHTING**

PS25

300

RS31295