

Shallow Surface Kirlin Lens Downlights

Features

Lamp

- Designed for:
 - 2 horizontal Twin Tube 13 watt: SS91075.
 - 2 horizontal Quad 26 watt: SS91376.
- 2 pin GX23 base: SS91075.
- 2 pin G24d-3 base: SS91376.
- See Option -43 for lower wattage.

Ballast

- Thermally protected and potted standard.
- 120 volt standard or standard.
- 120 volt standard or see optional voltages.
- Dimming optional for SS91376.
- Electronic optional for SS91376.

Fuse

- Available as Option -F5 (double).

Reflector



- Highly specular 84% reflectivity full-size aluminum.

Trim Assembly

- Tempered prismatic shock-resisting


spread Kirlin lens. See Option -43 for additional lens selection.

- Rust-free polished nickel brass door (304 L) with positive thumb screw.
- Door with concealed hinge for recessed mounting.
- Beveled cast aluminum frame tooled to match door.
- Tempered, rigid lens of minimum: Exceeds 100,000 hours M 5% salt spray.
- Door dissipates heat across entire surface area.
- No visible horizontal lines.
- White or silver selected finish is available.
- Center point mounting snug fit to ceiling for pendant or wall mounting.
- Indoor or outdoor for bare ceiling use. (See Option -80).
- Mounts beneath surface outlet box or ceiling (See Option -80).
- UL (Canada) Listing.
- Wet, damp or dry location, covered ceilings.
- Three Year Limited Warranty.

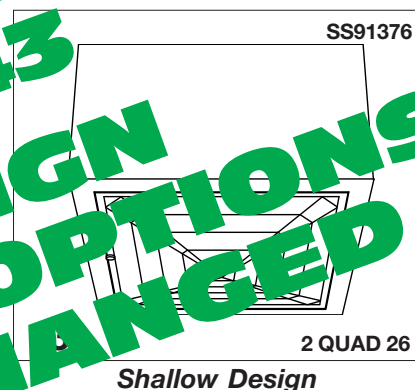
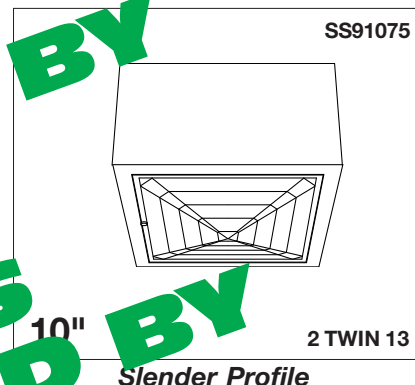


Performance at a Glance


SS91075

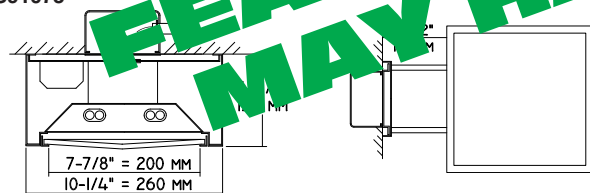

SS91376




Note: Plan Views shown with optional wall bracket (Option -WB).



Ft.	FC	Dia.
6	9.5	7.0
8	5.4	9.3
10	3.4	11.7
12	2.4	14.0
14	1.8	16.4
16	1.3	18.7


SS91075



Ft.	FC	Dia.
6	17.6	6.8
8	9.9	9.1
10	6.3	11.4
12	4.4	13.7
14	3.2	15.9
16	2.5	18.2

SS91376

Multiple Fixture FC Calculator **



SS91075 — SS91376 - - -

Cone of Light Key

- Ft. Distance from fixture
 - FC Footcandles (average)
 - Dia. Circle of light at 50% of FC
- *Dia. (in ft.) shown is where FC value is half the FC at nadir.
- **Based on RCR2; ceiling 70%; wall 50%; floor 20%. Use S/MH shown for each fixture.
- Distribution curves and S/MH data shown are 90° to lamp axis.

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121

CENTURY SERIES
ARCHITECTURAL
COMPACT FLUORESCENT LIGHTING

MAXIMUM WATTAGE
2 Twin 13
2 Quad 26

CATALOG NUMBERS
SS91075
SS91376

THE KIRLIN COMPANY RESERVES THE RIGHT TO CHANGE, WITHOUT NOTICE, DETAILS OR SPECIFICATIONS IN PRODUCT DESIGN.

