


CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

5" LED

VNR-05041

Vandal Resistant LED Round MarkerLight

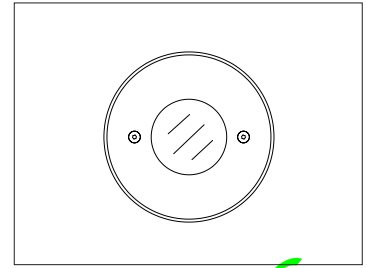

Specifications

LED

- White module (color filters optional).
- 3500°K standard.
- 6 system watts - energy efficient, uniform, cool.

LED Power Supply / Driver

- 10 volt DC. Electronically stabilized.
- Minimum operating temperature -13°F (-25°C).
- 120-277 volt standard. Load insensitive.

Lens (Gasketed)

- Translucent white 1/8" polycarbonate
- Gasketing between lens and faceplate.

Faceplate (Gasketed)

- Gasketed aluminum trim.
- White finish standard. Optional colors.

- Secured to housing with two center pin tamperproof screws and captive nuts.

- Tamperproof tool included.

Housing, Shallow 2 1/4"

- 2" x 2 1/4" standard U.L. listed octagon galvanized steel outlet box.
- Faceplate removable for servicing.

Installation

- Recesses in wall indoor or outdoor, covered locations.
- Mounting holes provided on top and bottom.

UL C-UL (Canada) Listings

- Damp or dry locations, covered ceilings.

5 FIVE YEAR
Year Limited Warranty



- Complete standard fixture.




Exceptional
Energy
Efficiency

Performance at a Glance

VNR-05041



Footcandle Performance Opposite Fixture
Installed Top View

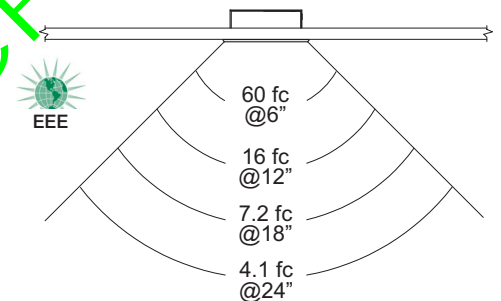

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

ENERGY EFFICIENT VANDAL RESISTANT
& MAXIMUM SECURITY LIGHTING

MAXIMUM WATTAGE

CATALOG NUMBER

LED

VNR-05041


DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL
INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

Detailed Photometry - Installed Fixture

Photometry from I.T.L., Boulder, CO

VNR-05041 (LED)

Footcandle Performance Opposite Fixture
Installed Top View

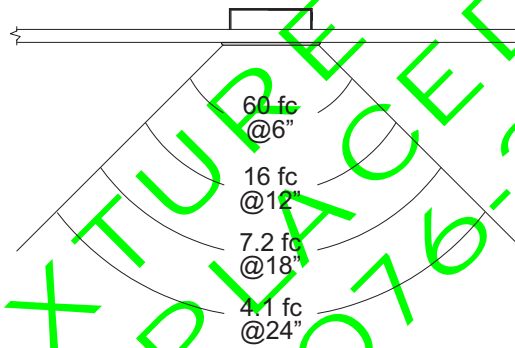

Options

Wattage and Voltage

- 97 Specify other voltage. Consult factory.
- EI Remote emergency inverter for 100% of rated lumens. Run time: 90+ minutes. 120 or 277V, 60 Hz input only. Specify voltage.

LED Filter Colors

- BL Blue LED module instead.
- GE Green LED module instead.
- OR Orange LED module instead.
- RA Red/Amber LED module instead.
- YE Yellow LED module instead.
- CF Custom color filter (Rosco). Specify.

Luminaire (Faceplate/Frame) Finishes

- 35 Natural aluminum acrylic enamel.
- 36 Gold acrylic enamel.
- 37 Dark Bronze acrylic enamel.
- 38 Black acrylic enamel.
- 94 Custom color/finish. Specify. Consult factory.

Other

- 99 Special modification. Consult factory.

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME

TYPE

WATTAGE

VOLTAGE

CATALOG NUMBER

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALL TO N.E.C. IN NORMAL USE. Manufacturer of the fixture will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the offices of manufacturer within the time period specified. Liability of manufacturer is limited to the foregoing and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is subject to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any statement constitute a warranty or amend the specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.

THIS FIXTURE HAS BEEN REPLACED BY VNR-05076-26 SOME OPTIONS MAY HAVE CHANGED