


| | | |
|-----------|---------|---------|
| CATALOG # | TYPE | |
| JOB NAME | WATTAGE | VOLTAGE |

5" LED

VNR-05042

Vandal Resistant LED Eyelid NightLight

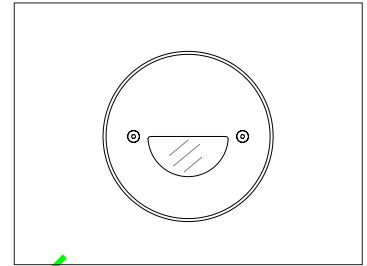

Specifications

LED

- White module (color filters optional).
- 3500°K standard.
- 6 system watts - energy efficient, uniform, cool.

LED Power Supply / Driver

- 10 volt DC. Electronically stabilized.
- Minimum operating temperature -13°F (-25°C).
- 120-277 volt standard. Load insensitive.

Lens (Gasketed)

- Tempered microprismatic glass behind 1/8" clear polycarbonate.
- Gasketing between lens and faceplate.

Faceplate (Gasketed)

- Gasketed aluminum trim.
- White finish standard. Optional colors.

- Secured to housing with two center pin tamperproof screws and captive nuts.
- Tamperproof tool included.

Housing: Shallow 2 1/4"

- 4" x 2 1/4" standard U.L. listed octagon galvanized steel outlet box.
- Faceplate removable for servicing.

Installation

- Recesses in wall indoor or outdoor, covered locations.
- Mounting holes provided on top and bottom.

UL, CUL (Canada) Listings

- Damp or dry locations, covered ceilings.

5 Year Limited Warranty



- Complete standard fixture.




**Exceptional
Energy
Efficiency**

Performance at a Glance

VNR-05042



Footcandle Performance On the Floor - Top View
(Installed 14" above finished floor.)

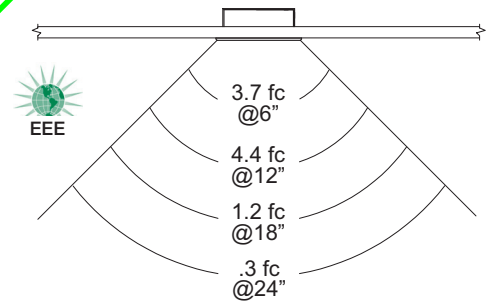

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

**ENERGY EFFICIENT VANDAL RESISTANT
& MAXIMUM SECURITY LIGHTING**

MAXIMUM WATTAGE

LED

CATALOG NUMBER

VNR-05042


DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

Detailed Photometry - Installed Fixture

Photometry from I.T.L., Boulder, CO

VNR-05042 (LED)

Footcandle Performance On the Floor - Top View
(Installed 14" above finished floor.)

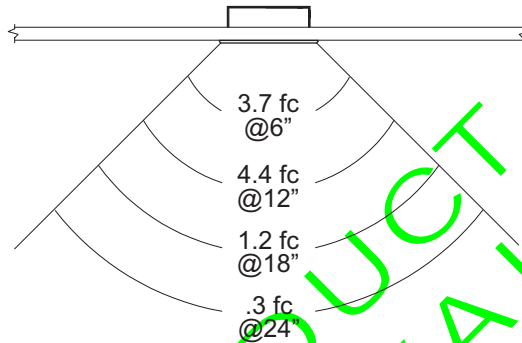

Options

Wattage and Voltage

- 97 Specify other voltage. Consult factory.
- EI Remote emergency inverter for 100% of rated lumens. Run time: 90+ minutes. 120 or 277V, 60 Hz input only. Specify voltage.

LED Filter Colors

- BL Blue LED module instead.
- GE Green LED module instead.
- OR Orange LED module instead.
- RA Red/Amber LED module instead.
- YE Yellow LED module instead.
- CF Custom color filter (Rosco). Specify.

Luminaire (Faceplate/Frame) Finishes

- 35 Natural aluminum acrylic enamel.
- 36 Gold acrylic enamel.
- 37 Dark Bronze acrylic enamel.
- 38 Black acrylic enamel.
- 94 Custom color/finish. Specify. Consult factory.

Other

- 99 Special modification. Consult factory.

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME

TYPE

WATTAGE

VOLTAGE

CATALOG NUMBER

NO LONGER AVAILABLE.
 SEE VNR-05077-26 AS SUGGESTED REPLACEMENT

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALL TO N.E.C. IN NORMAL USE. Manufacturer of the fixture will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the offices of manufacturer within three years of original shipment. Liability of manufacturer is limited to the foregoing and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.