


CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

3" x 7"      LED      VNT-03038

## Vandal Resistant LED StepLight

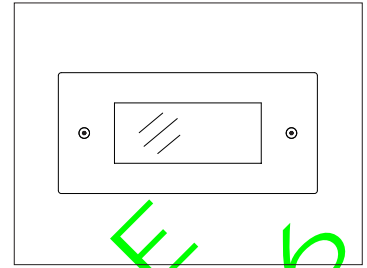

### Specifications

#### LED

- White module (color filters optional).
- 3500°K standard.
- 6 system watts - energy efficient, uniform, cool.

#### LED Power Supply / Driver

- 10 volt DC. Electronically stabilized.
- Minimum operating temperature -13°F (-25°C).
- 120-277 volt standard. Load insensitive.

#### Lens (Gasketed)

- 1/8" white polycarbonate.
- Secured between faceplate and housing by center pin tamperproof screws and captive nuts.
- Gasketing between lens and faceplate.

#### Faceplate (Gasketed)

- Gasketed aluminum trim; white finish standard.

- Secured to housing with two center pin tamperproof screws and captive nuts.
- Tamperproof tool included.

#### Housing

- Super shallow 2½" depth. Cool. Acrylic, enameled aluminum. Rustproof: Exceeds 1000 hour ASTM 5% salt spray test.

#### Installation

- Recesses indoors or outdoors, covered locations.
- Mounting holes provided on top, bottom and ends.

#### UL, C-UL (Canada) Listings

- Damp or dry locations, covered ceilings.

**5 Year FIVE YEAR Limited Warranty**


- Complete standard fixture.




**Exceptional Energy Efficiency**

### Performance at a Glance

VNT-03038

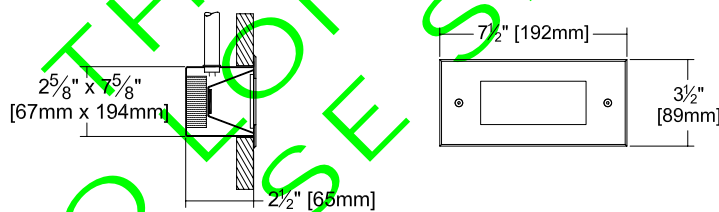

Footcandle Performance Opposite Fixture Installed Top View

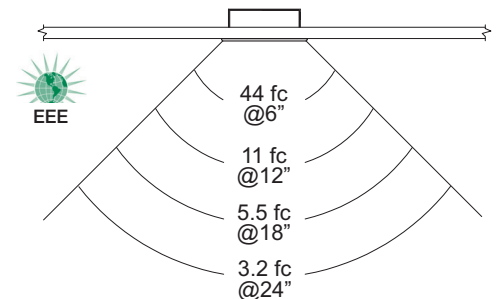

## THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232  
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

**ENERGY EFFICIENT VANDAL RESISTANT & MAXIMUM SECURITY LIGHTING**

MAXIMUM WATTAGE

CATALOG NUMBER

LED

VNT-03038


DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

Detailed Photometry - Installed Fixture

Photometry from I.T.L., Boulder, CO

VNT-03038 (LED)

Footcandle Performance Opposite Fixture  
Installed Top View

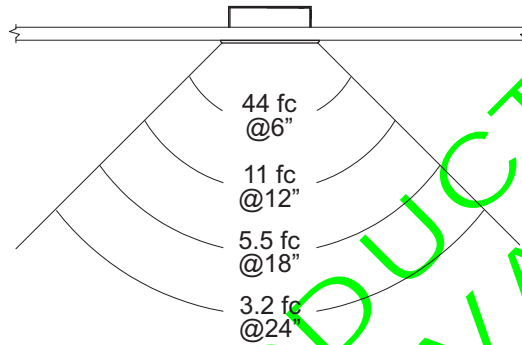

Options

**Wattage and Voltage**

- 97 Specify other voltage. Consult factory.
- EI Remote emergency inverter for 100% of rated lumens. Run time: 90+ minutes. 120 or 277V, 60 Hz input only. Specify voltage.

**LED Filter Colors**

- BL Blue LED module instead.
- GE Green LED module instead.
- OR Orange LED module instead.
- RA Red/Amber LED module instead.
- YE Yellow LED module instead.
- CF Custom color filter (Rosco). Specify.

**Luminaire (Faceplate/Frame) Finishes**

- 35 Natural aluminum acrylic enamel.
- 36 Gold acrylic enamel.
- 37 Dark Bronze acrylic enamel.
- 38 Black acrylic enamel.
- 94 Custom color/finish. Specify. Consult factory.

**Other**

- 99 Special modification. Consult factory.

SUBMITTAL DATA

JOB NAME \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 WATTAGE \_\_\_\_\_ VOLTAGE \_\_\_\_\_  
 CATALOG NUMBER \_\_\_\_\_

APPROVAL STAMP

NO THIS PRODUCT IS AVAILABLE  
PLEASE SEE VNT-03096-20

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALL TO N.E.C. IN NORMAL USE. Manufacturer of the fixture will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the offices of manufacturer within three years of original shipment. Liability of manufacturer is limited to the foregoing and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any other statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.