


CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

7" x 9" LED VNT-07037

Maximum Security LED Nightlight

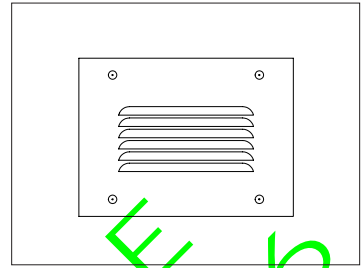

Specifications

LED

- White module (colors optional).
- 6 system watts - energy efficient, uniform luminance, cool.

LED Power Supply / Driver

- 10 volt DC. Electronically stabilized.
- Minimum operating temperature -4°F (-20°C).
- 120-277 volt standard. Load insensitive.

Lens (Gasketed)

- 1/4" clear polycarbonate behind louver.
- Secured between faceplate and housing by center pin tamperproof screws and captive nuts.
- Gasketing between lens and faceplate.

Faceplate (Gasketed)

- White polyester enameled die-formed 16 gauge galvanized steel. Removable for servicing.

- Secured to housing with four center pin tamperproof screws and captive nuts.
- Gasketing between faceplate and wall.
- Tamperproof tool included.

Housing

- 16 gauge galvanized steel, formed and welded. White acrylic enamel finish.

Installation

- Recesses indoors or outdoors, covered locations.
- Minimum operating temperature: -4°F (-20°C)
- Ten 1/2" T.S. (7/8" dia.) wiring KO's.
- Mounting holes provided on top, bottom, ends and rear.

UL, C-UL (Canada) Listings




- Damp or dry locations, covered ceilings.

5 Year Limited Warranty
• Complete standard fixture.


Performance at a Glance

Footcandle Performance On the Floor - Top View
(Installed 14" above finished floor.)


VNT-07037

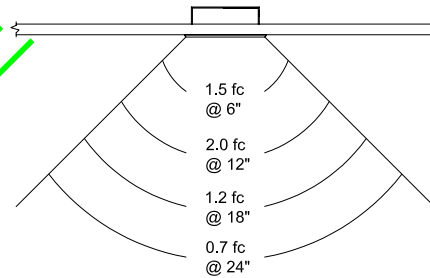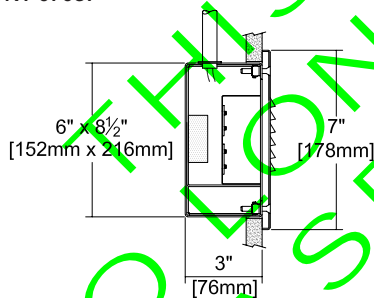

STANDARD TRIM



Lens Option -17



Housing KO's

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

**ENERGY EFFICIENT VANDAL RESISTANT
& MAXIMUM SECURITY LIGHTING**

MAXIMUM WATTAGE

CATALOG NUMBER

LED

VNT-07037


DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

Detailed Photometry - Installed Fixture

Photometry from I.T.L., Boulder, CO

VNT-07037 (LED)

Footcandle Performance On the Floor - Top View
(Installed 14" above finished floor.)

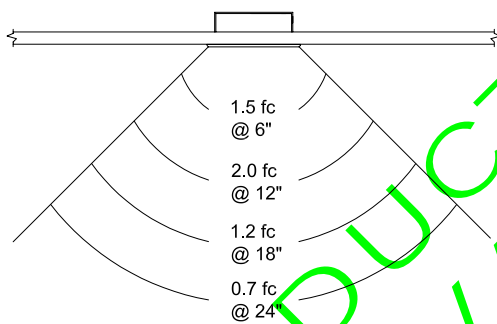

Options

Wattage and Voltage

- 97 Specify other voltage. Consult factory.
- EI Remote emergency inverter for 100% of rated lumens. Run time: 90 minutes. 120 or 277V, 60 Hz input only. Specify voltage.

LED Filter Colors

- BL Blue LED module instead.
- GE Green LED module instead.
- OR Orange LED module instead.
- RA Red/Amber LED module instead.
- YE Yellow LED module instead.
- CF Custom color filter (Rosco). Specify.

Lenses and Trims

- 17 1/8" high strength acrylic prismatic lens instead of standard lens.

Luminaire (Faceplate/Frame) Finishes

- 35 Natural aluminum acrylic enamel.
- 37 Dark Bronze acrylic enamel.
- 38 Black acrylic enamel.
- 94 Custom color/finish. Specify. Consult factory.

Other

- 99 Special modification. Consult factory.

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME

TYPE

WATTAGE

VOLTAGE

CATALOG NUMBER

NO LONGER AVAILABLE
PLEASE SEE LNV-07126-20

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE Warranted FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALL TO N.E.C. IN NORMAL USE. Manufacturer of the option will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the offices of manufacturer. Manufacturer's original shipment. Liability of manufacturer is limited to the foregoing and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.