


CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

7" 2 Triple 42 WATT MAXIMUM

GRR-07009

CFL 2 x 42 with Excellent Cut-Off



Specifications

Lamp

- Designed for two 4-pin triple tube amalgam or quad compact fluorescent lamps: 42/32/26W triple or 26W quad.

Ballast: Multi Wattage/Voltage

- Installed electronic high power factor, thermally protected. Internally fused.
- 120-277 multi-volt; 50/60 Hz; PF > 0.95
- Cold weather minimum starting temperature: 22°F (-30°C).
- Single circuit wiring.
- Provides end of lamp life protection circuit.
- ClickQuick connectors for easy service.

Reflector

- Low iridescence (L.I.) Alzak® luminaire, one piece, self-flanged.

Aluminum Housing: Shallow 6" Depth

- Acrylic enameled. Rustproof: Exceeds 1000 hour ASTM 5% salt spray test.

- Lightweight: Minimizes ceiling load.
- Cool operation: Extends component life.
- Entire luminaire serviced through aperture.
- Built-in plaster frame.

Outlet Box

- Prewired 14 GA (NEC) galvanized steel, UL listed, 1/2" x 1 1/2" x 1 1/2" knockout.
- 27" galvanized pan for ears with adjustable mounting brackets (2) supplied.
- Recesses indoor or outdoor in covered locations.
- UL-C (Canadian) listed.
- Wet, damp or dry locations, above and below ceiling.
- Through-branch conductors (6#12).

Three Year Limited Warranty


- Complete standard factory warranty.



QuickShip Program Luminaire

THIS PRODUCT IS NO LONGER AVAILABLE

Performance at a Glance

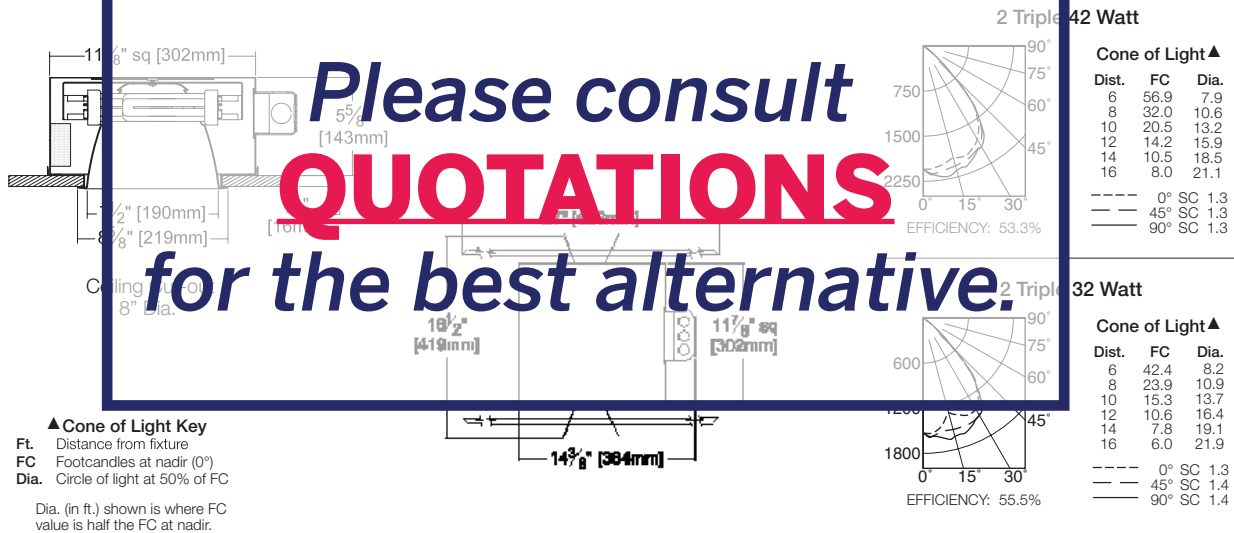

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

**GAZELLE EXPRESS:
COMPACT FLUORESCENT LIGHTING**

MAXIMUM WATTAGE
2 Triple 42

CATALOG NUMBER
GRR-07009


DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

Alzak® is a registered trademark of ALCOA.

Detailed Photometry - Installed Fixture


Photometry from I.T.L., Boulder, CO

GRR-07009 (2 Triple 42)

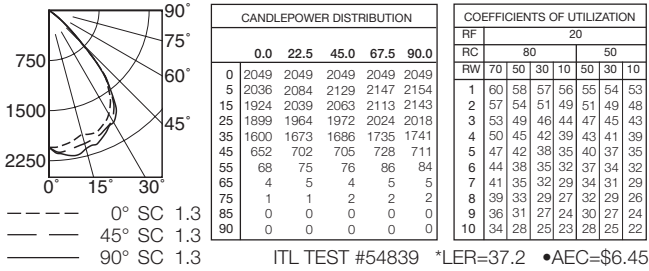


EFFICIENCY : 53.3%

GRR-07009 (2 Triple 32)

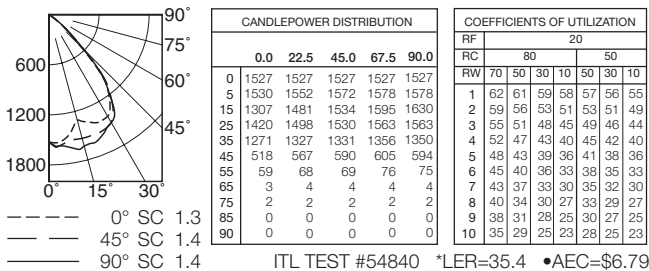

EFFICIENCY : 55.5%

GRR-07009 (2 Triple 26)

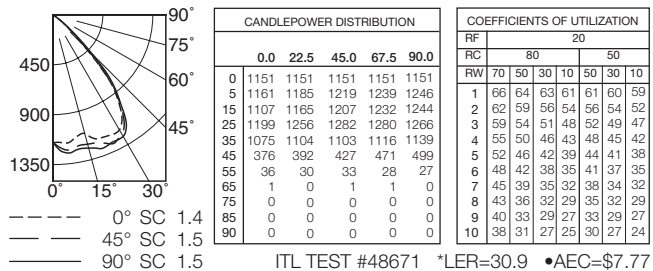

EFFICIENCY : 58.8%

* = **Luminaire Efficiency Rating**
 $LER = \frac{\text{Luminaire Effic.} \times \text{Total Lamp Lumens} \times \text{Ballast Factor}}{\text{Input Watts}}$

• = **Annual Energy Cost per luminaire (based on 3000 hrs @ \$0.08 KWH).**

Options Available

Ballast, Wattage and Voltage

- 39 Installed electronic dimming ballast. Indoor use. 10°C (50°F) minimum start. Lutron EcoSystem 5% (120-277V) only.

Emergency Ballast - Specify Voltage

- 73 Internal (factory installed) 1-lamp EM ballast, test switch and indicator light. Suitable for damp locations from 0° to 50°C (32° to 122°F). Specify voltage.

Trims

- 45 Gasket between ceiling and reflector flange.



QuickShip Program Luminaire

- Orders received by 10 AM (ET) ship by 5 PM within 72 hours
- Fixtures ship complete. Freight allowed: Over \$7000
- 50 luminaires (max.) per type on each purchase order (or consult RSM)

SUBMITTAL DATA

APPROVAL STAMP

JOB NAME

TYPE

WATTAGE

VOLTAGE

CATALOG NUMBER

LIMITED WARRANTY: CATALOGUED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALLATION TO N.E.C. IN NORMAL USE. Manufacturer at his option will replace or repair each fixture or return the purchase price on presentation of proof of purchase and defective fixture at the office of manufacturer within three years of manufacture. Liability of manufacturer is limited to the company, and manufacturer shall be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.