


8" 2 Triple 42 WATT MAXIMUM

GRR-08039

CFL 2 x 42 High Lumen Output
Regressed Lens • Seamless White Trim



Specifications

Lamp

- Designed for two 4-pin triple tube amalgam or quad compact fluorescent lamps:
42/32/26W triple or 26W quad.

Ballast: Multi-Wattage/Voltage

- Installed electronically high power factor, thermally protected. Internally fused.
- 120-277 volt, 50/60 Hz, THHN < 100% minimum starting current.
- Cold weather temperature rating: 22°F (-30°C).
- Single circuit wiring.
- Provides end of lamp life protection circuit.
- ClickQuick connectors for easy service.

Reflector

- Specular Alzak[®] aluminum.

Trim Assembly

- Tapered aluminum one piece all white smooth self-finished trim.
- Regressed tempered prismatic C#73 le

Aluminum Housing: Shallow 6" Depth

- Acrylic enameled. Rustproof: Exceeds 1000 hour ASTM 5% salt spray test.
- Lightweight: Minimizes ceiling load.
- Cool operation: Extends component life.
- Entire luminaire serviced through aperture.
- Built-in plaster frame.

Outlet Box

- PRODUCT**

- Recesses indoor or outdoor in covered locations.

- # LONG

Three Year Limited Warranty


- # ADRI





QuickShip
Program
Luminaire

THIS PRODUCT IS NO LONGER AVAILABLE

Performance at a Glance

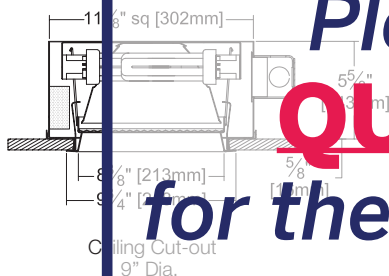

Please consult
QUOTATIONS
the best alternative.

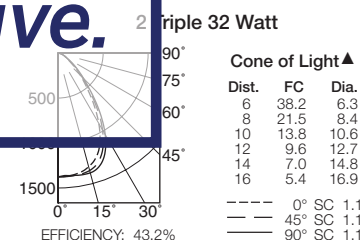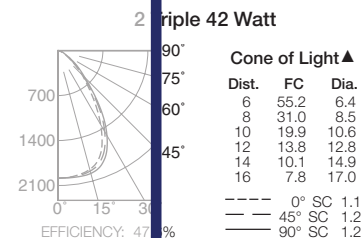

▲ Cone of Light Key

Ft.	Distance from fixture
FC	Footcandles at nadir (0°)
Dia.	Circle of light at 50% of FC

Dia. (in ft.) shown is where FC value is half the FC at nadir.

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

GAZELLE EXPRESS: COMPACT FLUORESCENT LIGHTING

MAXIMUM WATTAGE

2 Triple 42

CATALOG NUMBER

GRR-08039


DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE

Alzak® is a registered trademark of ALCOA.

Detailed Photometry - Installed Fixture


Photometry from I.T.L., Boulder, CO

GRR-08039 (2 Triple 42)

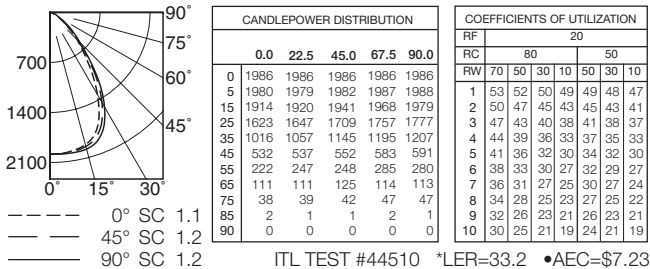


EFFICIENCY : 47.6%

GRR-08039 (2 Triple 32)

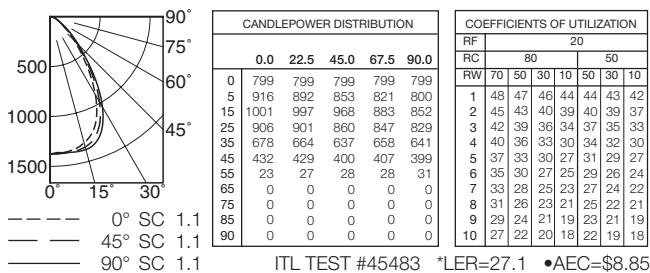

EFFICIENCY : 43.2%

GRR-08039 (2 Quad 26)

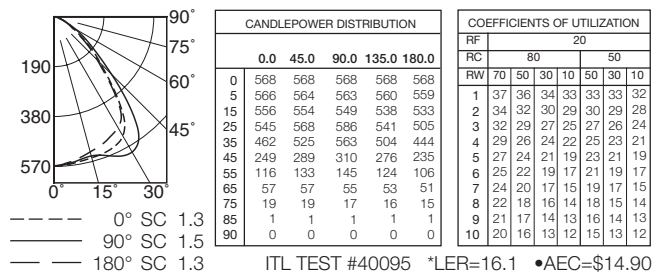

EFFICIENCY : 32.9%

* = Luminaire Efficiency Rating

LER = $\frac{\text{Luminaire Effic.} \times \text{Total Lamp Lumens} \times \text{Ballast Factor}}{\text{Input Watts}}$

• = Annual Energy Cost per luminaire (based on 3000 hrs @ \$0.08 KWH).

Options Available

Ballast, Wattage and Voltage

-39 Installed electronic dimming ballast. Indoor use.
 10°C (50°F) minimum start. Lutron EcoSystem
 5% (120-277V) only.

Emergency Ballast - Specify Voltage

-73 Internal (factory installed) 1-lamp EM ballast,
 test switch and indicator light. Suitable for
 damp locations from 0° to 50°C (32° to 122°F).
 Specify voltage.

Lenses and Trims

-45 Gasket between ceiling and trim flange.
 -46 Gasket between trim and lens.


**QuickShip
 Program
 Luminaire**

- Orders received by 10 AM (ET) ship by 5 PM within 72 hours
- Fixtures ship complete. Freight allowed: Over \$7000
- 50 luminaires (max.) per type on each purchase order (or consult RSM)

SUBMITTAL DATA

JOB NAME

TYPE

WATTAGE

VOLTAGE

CATALOG NUMBER

APPROVAL STAMP

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALLATION TO N.E.C. IN NORMAL USE. Manufacturer at his option will replace or repair each fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the office of manufacturer within three years of original shipment. Liability of manufacturer is limited to the property, and manufacturer shall be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.