

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

Lighting for Patient Spaces

Hitsville Nightlight

Type IC • Wet Listed • Available with: IP66 Rating, Dimming, Photocell, Occupancy Sensor, and Tamper-Proof Ligature-Resistant Design

Specifications

LED Source & Performance

- **Must Specify:** Static white LED source, or static wavelength ● 590nm (amber), ● 617nm (red/orange)
- Maximum 2.0 system watts
- Color filters available (recommended for use with static white sources)

LED Power Supply/Driver

- Standard construction: non-dimmable
- 1% dimming available, see Option -D1
- 120-277 volt, load insensitive

Lens

- 1/8" clear polycarbonate with anti-pixelation film behind

Faceplate

- Robust cast aluminum faceplate available in obround or rectangle

- Discreet fastener placement along lower edge
- Mounting features pull faceplate tight to wall, with gasketing around edge and at lens opening
- Optional tamper resistant screws available
- White finish standard; optional colors
- Optional white BioGard™ antimicrobial finish


Housing

- 16 GA. galvanized housing
- All installations must use Kirlin-provided housing for listings and warranty to be valid
- IK10 impact and vandal resistant when behavioral mounting bracket is used (see Option -26)

Installation

- Recessed in wall indoor or outdoor, covered locations
- Universal mounting bracket supports both -PLL and -RCT faceplates for field replacement

MTT-03NLT

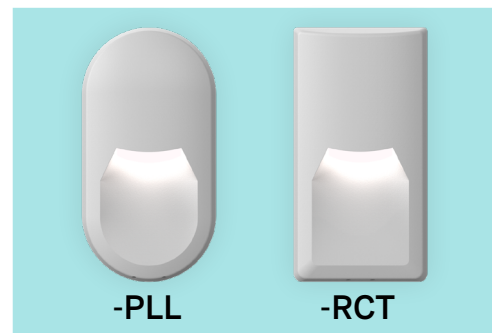

Quick Ship Eligible

- Eligible for Quick Ship of 2 weeks or less
- Quantity requirements: 10 - 100 pieces
- Requires choosing options in **red** on the next page and including the -QS option code

UL, C-UL (Canada) Listings

- Wet, damp or dry locations
- Type IC; approved for direct contact with insulation

FIVE YEAR Limited Warranty

- Complete standard fixture



Quick Ship
See Option -QS



BABAA Compliant
See Option -BA



IK10 Impact Resistant
See Option -26



Vandal Resistant
See Option -26



BioGard™
See Option -BG




IP66
See Option -I66




UL Listed
Wet, Damp, Dry


Dimensions

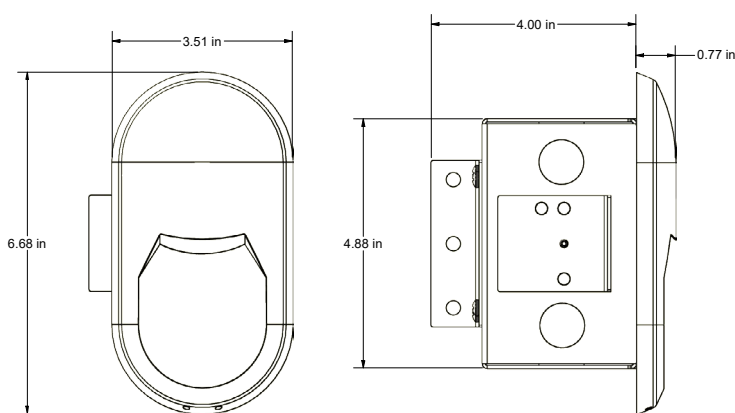


Oval Nightlight

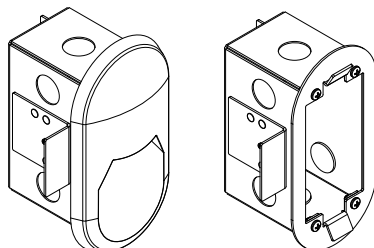

Shown with Option -26 wall bracing.
Must use Kirlin-provided housing. Wall cut-out dimensions: 4.875" H x 2.375" W.

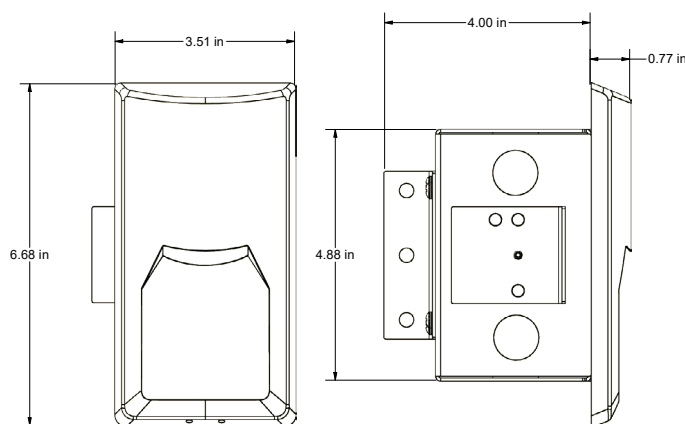

Rectangular Nightlight

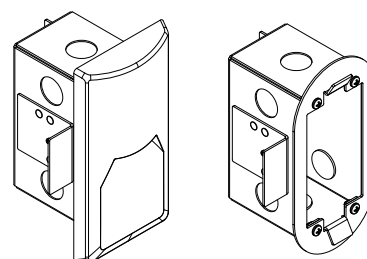

Shown with Option -26 wall bracing.
Must use Kirlin-provided housing. Wall cut-out dimensions: 4.875" H x 2.375" W.

Options and Ordering Configuration

(Example: MTT-03NLT-HO-RCT-35K-YE-BG-26)



Red text = Quick Ship Eligible

Must Specify				Optional			
Model	Lumens	Trim	CCT & CRI	Control	Filter Colors	Faceplate Options	Other Options
MTT-03NLT							
	-HO: High output -LO: Low output	-PLL: Oval/pill shape -RCT: Rectangular	-27K: 2700°K, 80+ CRI -30K: 3000°K, 80+ CRI -35K: 3500°K, 80+ CRI -40K: 4000°K, 80+ CRI -590: Static wavelength 590nm LED's -617: Static wavelength 617nm LED's	(Blank): Non-dimmable -D1: 0-10V 1.0% dim -D40: -40° non-dimming driver -OCC: Integral PIR occupancy sensor; 30 second delay; non-dimmable; Not available with Option -I66 -PC: Photocell; illuminates nightlight when room is dark; non-dimmable -PCOC: Photocell/Occupancy Sensor combination; illuminates nightlight when room is dark and motion is detected; non-dimmable; Not available with Option -I66	(Blank): No filter -BL: Blue filter -GE: Green filter -OR: Orange filter -RA: Red/amber filter -YE: Yellow filter -CF: Custom color filter (Rosco); specify	(Blank): Standard white finish -35: Silver (natural aluminum) acrylic enamel -37: Dark bronze acrylic enamel -38: Black acrylic enamel -BG: BioGard™ anti-microbial white -BKBG: BioGard™ anti-microbial black -94: Custom color; see page 3 for recommended custom colors; consult factory -94BG: BioGard™ anti-microbial custom color finish; see page 3 for recommended custom colors; consult factory	(Blank): None -26: Vandal resistant with 1/4" poly lens, tamperproof screws, and additional wall bracing; tamperproof tool included -99: Special modification; consult factory -BA: Buy America (BA, BAA) and Build America, Buy America (BABAA) compliant -I66: IP66 rated faceplate and lens; Not available with Options -OCC, -PCOC -QS: Quick Ship; Options must be only red items; Quantities of 10-100

LED Filter Colors



-RA



-OR



-YE



-GE



-BL







-CF

Performance

Photometry from L.L.I., Allentown, PA

LM-79 IESNA Certified Photometry from Independent Lab

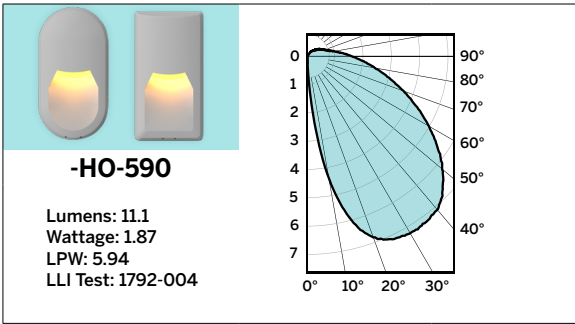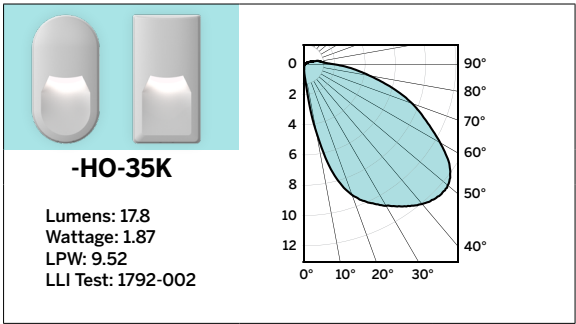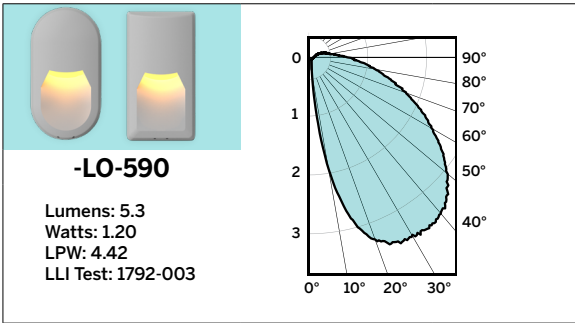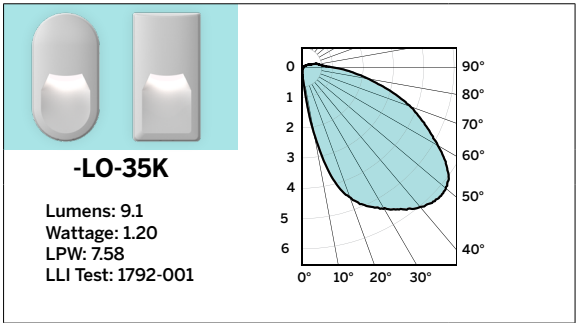


Recommended Custom Colors

The below colors match Kirlin's Scenic Patterns for a cohesive look throughout the space.
To be used with option code -94.

Calming Colors




Pale Marigold (-94PM)




Peaceful Pine (-94PP)



Moonlit Bay (-94MB)



Dreamy Dusk (-94DD)



Mudstone Magic (-94MM)




Soft Slate (-94SS)


Vibrant Colors



Electric Ember (-94EE)



Hot Orchid (-94HO)



Lemon Zing (-94LZ)




Kiwi Kick (-94KK)



Caribbean Lagoon
(-94CL)



Cerulean Wave (-94CW)



Glam Grape (-94GG)

Due to variations in monitor settings and screen resolutions, the appearance of colors, textures, and details in the images may differ from the actual product.