

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

Lighting for Patient Spaces

Hitsville Task Light

Available with: Touch Dimming, Adjustable Light Engine, IP66 Rating, Tamper-Proof, Ligature-Resistant Design

Specifications

LED Source & Performance

- Task light module with specifiable CCT and 90+ CRI
- Select beam distribution, see chart
- Module position is adjustable with Option -AL
- Maximum 5.9 system watts
- Up to 300 lumens delivered

LED Power Supply/Driver

- Indoor/Outdoor: -20°C to 60°C (-22°F to 140°F)
- 0-10V CCR dimming standard (100-1.0%)
- 120-277 volt, load insensitive
- For continuous capacitive touch dimming switch, see Option -TSD. Touch dimming will not be fully functional when fixture is wet.

Lens

- 1/8" clear polycarbonate

Faceplate

- Robust cast aluminum faceplate available in obround or rectangle
- Discreet fastener placement along lower edge

- Mounting features pull faceplate tight to wall, with gasketing around edge and at lens opening
- Optional tamper resistant screws available
- White finish standard; optional colors
- Optional white BioGard™ antimicrobial finish

Housing

- 16 GA. galvanized housing
- All installations must use Kirlin-provided housing for listings and warranty to be valid
- IK10 impact and vandal resistant when behavioral mounting bracket is used

Installation

- Recessed in wall indoor or outdoor, covered locations
- Universal mounting bracket supports both -PLL and -RCT faceplates for field replacement

MTT-03TSK



Quick Ship Eligible



- Eligible for Quick Ship of 2 weeks or less
- Quantity requirements: 10 - 100 pieces
- Requires choosing options in **red** on the next page and including the -QS option code

UL, C-UL (Canada) Listings

- Wet, damp or dry locations
- Type IC; approved for direct contact with insulation

FIVE YEAR Limited Warranty

- Complete standard fixture



Options and Ordering Configuration

(Example: MTT-03TSK-300L-PLL-NFL-30K-BG-26)

Must Specify					Optional		
Model	Lumens	Trim	Beam	CCT & CRI	Dimming	Faceplate Options	Other Options
MTT-03TSK							
	-300L -150L	-PLL: Oval/pill shape -RCT: Rectangular	-NFL -MFL -WFL	-30K: 3000°K, 90+ CRI -35K: 3500°K, 90+ CRI -40K: 4000°K, 90+ CRI	(Blank): Standard 0-10V dimming to 1% -TSD: Touch sensitive dimming switch flush-mounted on faceplate; consult factory for use with Option -I66	(Blank): Standard white finish -35: Silver acrylic enamel -37: Dark bronze acrylic enamel -38: Black acrylic enamel -BG: BioGard™ anti-microbial white -KBG: BioGard™ anti-microbial black -94: Custom color; see page 3 for recommended custom colors; consult factory -94BG: BioGard™ anti-microbial custom color finish; see page 3 for recommended custom colors; consult factory	(Blank): None -26: Vandal resistant with 1/4" poly lens, tamperproof screws, and additional wall bracing; tamperproof tool included -99: Special modification; consult factory -AL: Adjustable light engine -BA: Buy America (BA, BAA) and Build America, Buy America (BABAA) compliant -I66: IP66 rated faceplate and lens -QS: Quick Ship; Options must be only red items; Quantities of 10-100

Touch Sensitive Dimming Switch



-PLL-TSD




-RCT-TSD


With option TSD, the Hitsville task light is controllable by human touch. Tapping the switch will turn the task light on (at the previous light level) or off. Holding the switch will continuously dim the task light down to 1% output, and then cycle back up to 100% output.

Dimensions

-TSD switch
0.5" dia.

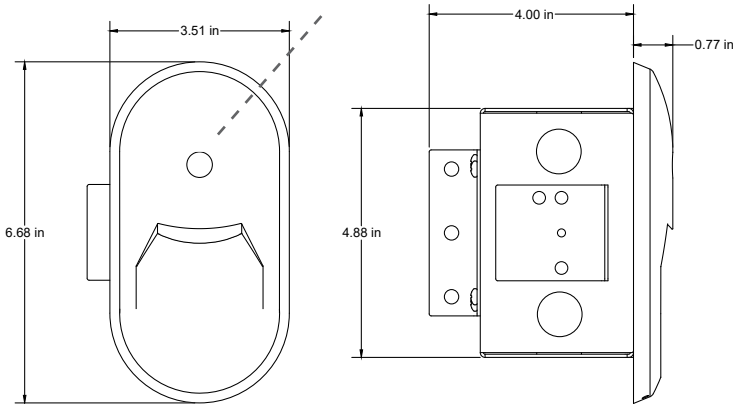


Oval Task Light

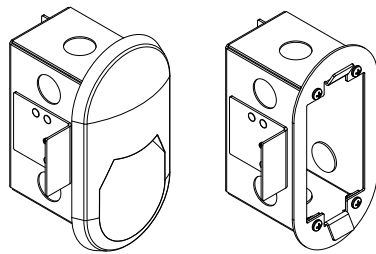


Shown with Option -26 wall bracing.
Must use Kirlin-provided housing. Wall cut-out dimensions: 4.875" H x 2.375" W.

-TSD switch
0.5" dia.

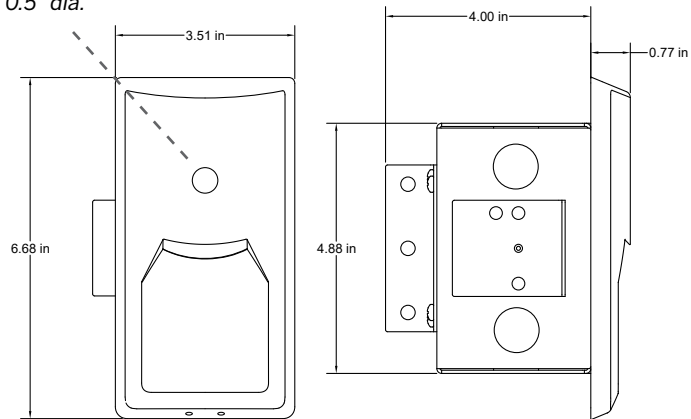

Rectangular Task Light



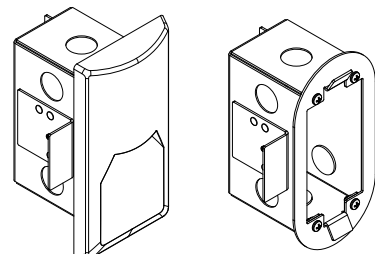


Shown with Option -26 wall bracing.
Must use Kirlin-provided housing. Wall cut-out dimensions: 4.875" H x 2.375" W.

Performance

Photometry from L.L.I., Allentown, PA

LM-79 IESNA Certified Photometry from Independent Lab

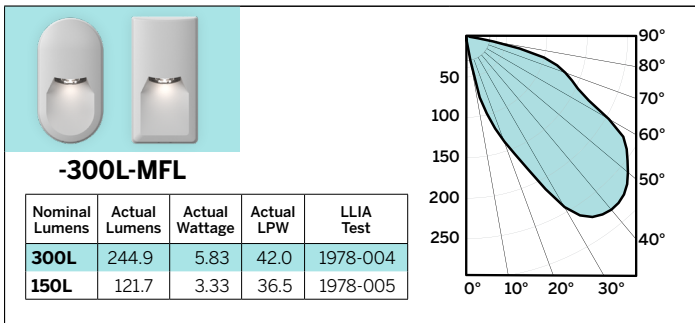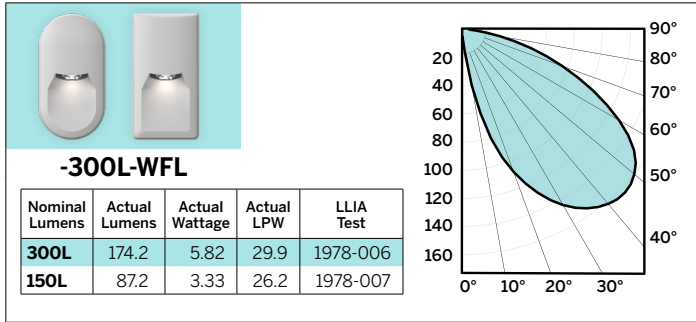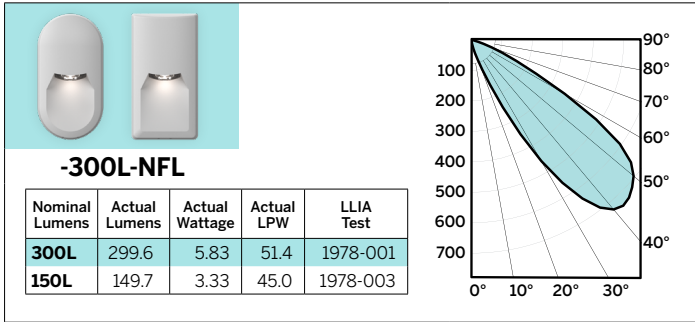

LIMITED WARRANTY: KIRLIN LIGHTING PRODUCTS ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR TWO YEARS FROM DATE OF PURCHASE. INSTALLATION TO E.C. IN NORMAL USE. Manufacturer at his option will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective nature of the fixture. Liability of manufacturer is limited to the foregoing and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.

PATENT SPACES
March 2025


Recommended Custom Colors

The below colors match Kirlin's Scenic Patterns for a cohesive look throughout the space.
To be used with option code -94.

Calming Colors




Pale Marigold (-94PM)




Peaceful Pine (-94PP)



Moonlit Bay (-94MB)



Dreamy Dusk (-94DD)




Mudstone Magic (-94MM)




Soft Slate (-94SS)


Vibrant Colors



Electric Ember (-94EE)



Hot Orchid (-94HO)



Lemon Zing (-94LZ)




Kiwi Kick (-94KK)



Caribbean Lagoon
(-94CL)



Cerulean Wave (-94CW)



Glam Grape (-94GG)

Due to variations in monitor settings and screen resolutions, the appearance of colors, textures, and details in the images may differ from the actual product.