

|           |         |         |
|-----------|---------|---------|
| CATALOG # | TYPE    |         |
| JOB NAME  | WATTAGE | VOLTAGE |

# Symphony Remote Driver Series

## Open Appearance 7" Downlight • LED

Up to 60,000 Hour Rated Life (L70) • Wet Location

LM-80 Qualified • LM-79 Certified Photometry

# SRR-07604



## Specifications

### Delivered System Performance

- Lumen Series: **Must Specify**
  - 6500L: 6500 nominal lumens (74W)
  - 5000L: 5000 nominal lumens (55W)
  - 4000L: 4000 nominal lumens (42W)
  - 2500L: 2500 nominal lumens (35W)
- Distributions: MFL standard; Optional: -SPT or -WFL
- Color temperature: 3500°K standard; Optional: -27K, -30K, -41K or -50K
- CRI: 80+ standard; Optional: -HC (90+)
- 60,000 hour rated life (L70)
- Fully sustainable: removable for servicing

### Thermal Management System

- All aluminum heat sink, components and housing maximize cool operation and long life while minimizing maintenance

### Remote Power Supply Required

- For 0-10V use **SYM-CABNT**
- For DMX with RDM use **SYM-DMXPS**
- The **Symphony Configurator** can help determine the necessary components

### SmartPower™ Battery Backup

- EMI-21220** for emergency power
- See specification sheet; order separately

### Trim

- Clear specular aluminum trim
- Self-flanged, low glare cone; prismatic spread lens above
- Optional colors and finishes available

### Acrylic Enameled Aluminum Housing

- Rustproof and corrosion resistant: Exceeds 1000 hour ASTM 5% salt spray test
- Interlocking flare trim
- Shallow depth fits restricted plenums
- Cool operation: Extends life of all components
- Fully sustainable: Entire luminaire, including LED light engine, easily visible and serviced through aperture
- Built-in plaster flange

### Outlet Box

- UL listed J-box with insulated removable cover; prewired 14 GA (NEC) with ½" and ¾" knockouts

### Installation

- Requires minimum 16 AWG shielded twisted pair wire from driver to fixtures

### Maximum cable run from driver to fixture is 250'

- Center point mounting for snug fit to ceiling; mounting hardware furnished
- 2" collar for surface J-box mount; See Option -80
- Indoor or outdoor for covered ceiling use Weather Cap available; See Option -89

### UL, C-UL (Canada) Listings

- Wet, damp or dry locations, covered ceilings; (See Option -89)
- 2500L (only): Type IC - for direct contact with insulation

### FCC Compliance

- FCC Part 15 certified for EMI/RFI emissions

### FIVE YEAR Limited Warranty

- Complete standard fixture (must be used with **SYM-CABNT** or **SYM-DMXPS**)

## Options and Ordering Configuration

(Example: SRR-07604-6500L-30K-AT)





| Must Specify |                                                                  | Optional                                                                                                                                                                          |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------|------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model        | Lumens                                                           | Color Temp. (CCT)                                                                                                                                                                 | Distribution                                                                                  | Lens & Trim                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Other Options                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| SRR-07604    |                                                                  |                                                                                                                                                                                   |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|              | <b>-6500L</b><br><b>-5000L</b><br><b>-4000L</b><br><b>-2500L</b> | <b>(Blank):</b> 3500°K<br><b>-27K:</b> 2700°K instead<br><b>-30K:</b> 3000°K instead<br><b>-41K:</b> 4000°K instead<br><b>-50K:</b> 5000°K instead<br><b>-HC:</b> 90+ CRI instead | <b>(Blank):</b> MFL<br><b>-SPT:</b> Spot distribution<br><b>-WFL:</b> Wide flood distribution | <b>(Blank):</b> Clear specular trim; lens above<br><b>-13:</b> Clear flat polycarbonate below with prismatic flat lens above<br><b>-23:</b> Frosted microprismatic lens instead<br><b>-30T:</b> White enamel (complete trim)<br><b>-30F:</b> White enamel (flange only)<br><b>-32:</b> White oversize trim ring; specify O.D.<br><b>-33:</b> Decorative Glow Ring; see last page for details<br><b>-37F:</b> Dark bronze enamel (flange only)<br><b>-38F:</b> Black enamel (flange only)<br><b>-45:</b> Gasket between trim and ceiling<br><b>-70T:</b> Clear semi-specular SofTex™ (complete trim)<br><b>-94:</b> Custom color/finish; specify; consult factory<br><b>-WA:</b> White acrylic (flat) diffuser instead | <b>(Blank):</b> None<br><b>-79:</b> Extension collar for ceilings up to 2" thick<br><b>-99:</b> Special modification; consult factory<br><b>-AT:</b> Air tight version; meets ASTM E283 restricted airflow of 2 CFM maximum<br><b>-RH:</b> Residential mounting hardware instead; suitable for wood joist ceilings with spacing from 14 ½" to 25 ⅞" with ⅝" vertical adjustability<br><b>-SH:</b> Sealed housing and junction box for -5000L; see Option -AT for use with -2500L<br><b>-TA:</b> Top Access for servicing from above ceiling |

## Photometry - Installed Complete Fixture

LM-79 IESNA Certified Photometry from Independent Lab


Photometry from I.T.L., Boulder, CO

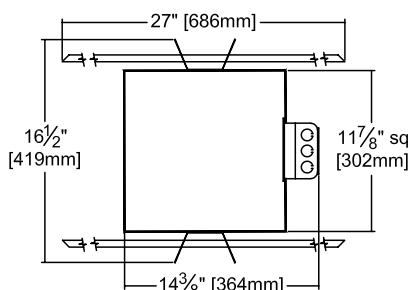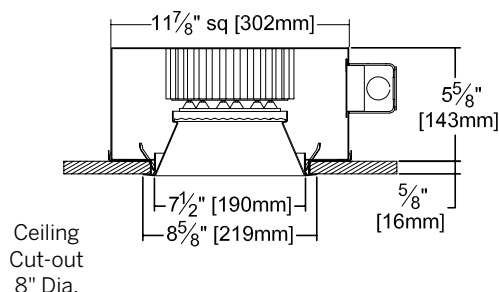

### -6500L STANDARD (MFL)

Lumens: 5739  
Beam: ~39°  
SC: 0.7  
LPW: 79  
Efficiency: 71.5%  
ITL Test: 88084

EEE



Total System Watts 72.7

| CANDLEPOWER DISTRIBUTION |      |      |      |      |      |
|--------------------------|------|------|------|------|------|
|                          | 0.0  | 22.5 | 45.0 | 67.5 | 90.0 |
| 0                        | 9435 | 9435 | 9435 | 9435 | 9435 |
| 5                        | 9165 | 9165 | 9165 | 9165 | 9165 |
| 15                       | 7133 | 7133 | 7133 | 7133 | 7133 |
| 25                       | 3755 | 3755 | 3755 | 3755 | 3755 |
| 35                       | 1206 | 1206 | 1206 | 1206 | 1206 |
| 45                       | 366  | 366  | 366  | 366  | 366  |
| 55                       | 96   | 96   | 96   | 96   | 96   |
| 65                       | 14   | 14   | 14   | 14   | 14   |
| 75                       | 0    | 0    | 0    | 0    | 0    |
| 85                       | 0    | 0    | 0    | 0    | 0    |
| 90                       | 0    | 0    | 0    | 0    | 0    |

### -6500L Option -SPT

Lumens: 6321  
Beam: ~18°  
SC: 0.3  
LPW: 87  
Efficiency: 81.3%  
ITL Test: 86314

**Total System Watts 72.5**


| CANDLEPOWER DISTRIBUTION |       |       |       |       |       |       |
|--------------------------|-------|-------|-------|-------|-------|-------|
|                          | 0.0   | 22.5  | 45.0  | 67.5  | 90.0  |       |
| 0                        | 35156 | 35156 | 35156 | 35156 | 35156 | 35156 |
| 5                        | 28505 | 28505 | 28505 | 28505 | 28505 | 28505 |
| 15                       | 7829  | 7829  | 7829  | 7829  | 7829  | 7829  |
| 25                       | 2266  | 2266  | 2266  | 2266  | 2266  | 2266  |
| 35                       | 641   | 641   | 641   | 641   | 641   | 641   |
| 45                       | 224   | 224   | 224   | 224   | 224   | 224   |
| 55                       | 71    | 71    | 71    | 71    | 71    | 71    |
| 65                       | 11    | 11    | 11    | 11    | 11    | 11    |
| 75                       | 0     | 0     | 0     | 0     | 0     | 0     |
| 85                       | 0     | 0     | 0     | 0     | 0     | 0     |
| 90                       | 0     | 0     | 0     | 0     | 0     | 0     |

### -6500L Option -WFL

Lumens: 6100  
Beam: ~46°  
SC: 0.9  
LPW: 84  
Efficiency: 78.4%  
ITL Test: 86312

Total System Watts 72.5

| CANDLEPOWER DISTRIBUTION |      |      |      |      |      |
|--------------------------|------|------|------|------|------|
|                          | 0.0  | 22.5 | 45.0 | 67.5 | 90.0 |
| 0                        | 8007 | 8007 | 8007 | 8007 | 8007 |
| 5                        | 8141 | 8152 | 8156 | 8134 | 8118 |
| 15                       | 7834 | 8241 | 8717 | 8409 | 7993 |
| 25                       | 3803 | 4011 | 4326 | 4371 | 4261 |
| 35                       | 1024 | 1074 | 1143 | 1137 | 1110 |
| 45                       | 314  | 335  | 363  | 342  | 330  |
| 55                       | 81   | 86   | 96   | 95   | 98   |
| 65                       | 8    | 8    | 9    | 10   | 10   |
| 75                       | 0    | 0    | 0    | 0    | 0    |
| 85                       | 0    | 0    | 0    | 0    | 0    |
| 90                       | 0    | 0    | 0    | 0    | 0    |



▲ Cone of Light Key

Dia. (in ft.) shown is where FC value is half the FC at nadir.

**Dist.** Distance (Ft.) from fixture  
**FC** Footcandles at nadir (0°)  
**Dia.** Circle of light at 50% of FC

**See following page for -5000L, -4000L and -2500L performance**

## Detailed Photometry - Installed Fixture

Photometry from UL Verification Services, Allentown, PA


## SRR-07604-5000L PERFORMANCE

## -5000L STANDARD (MFL)

Lumens: 5007  
 Beam: ~46°  
 SC: 0.8  
 LPW: 84  
 Efficiency: 84.2%  
 UL Test: 11356591.03

**Total System Watts 59.4**

| CANDLEPOWER DISTRIBUTION |      |      |      |      |      |
|--------------------------|------|------|------|------|------|
|                          | 0.0  | 22.5 | 45.0 | 67.5 | 90.0 |
| 0                        | 6645 | 6645 | 6645 | 6645 | 6645 |
| 5                        | 6761 | 6761 | 6761 | 6761 | 6761 |
| 15                       | 6927 | 6927 | 6927 | 6927 | 6927 |
| 25                       | 3362 | 3362 | 3362 | 3362 | 3362 |
| 35                       | 912  | 912  | 912  | 912  | 912  |
| 45                       | 319  | 319  | 319  | 319  | 319  |
| 55                       | 84   | 84   | 84   | 84   | 84   |
| 65                       | 3    | 3    | 3    | 3    | 3    |
| 75                       | 1    | 1    | 1    | 1    | 1    |
| 85                       | 0    | 0    | 0    | 0    | 0    |
| 90                       | 0    | 0    | 0    | 0    | 0    |

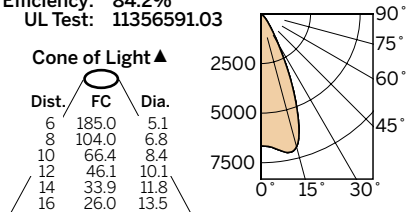


## SRR-07604-4000L PERFORMANCE

### -4000L STANDARD (MFL)

Lumens: 3819  
 Beam: ~31°  
 SC: 0.6  
 LPW: 86  
 Efficiency: 80.1%  
 UL Test: 11356591.05

**Total System Watts 44.7**

| CANDLEPOWER DISTRIBUTION |      |      |      |      |      |
|--------------------------|------|------|------|------|------|
|                          | 0.0  | 22.5 | 45.0 | 67.5 | 90.0 |
| 0                        | 8009 | 8009 | 8009 | 8009 | 8009 |
| 5                        | 7517 | 7517 | 7517 | 7517 | 7517 |
| 15                       | 4644 | 4644 | 4644 | 4644 | 4644 |
| 25                       | 2158 | 2158 | 2158 | 2158 | 2158 |
| 35                       | 854  | 854  | 854  | 854  | 854  |
| 45                       | 330  | 330  | 330  | 330  | 330  |
| 55                       | 63   | 63   | 63   | 63   | 63   |
| 65                       | 3    | 3    | 3    | 3    | 3    |
| 75                       | 1    | 1    | 1    | 1    | 1    |
| 85                       | 0    | 0    | 0    | 0    | 0    |
| 90                       | 0    | 0    | 0    | 0    | 0    |

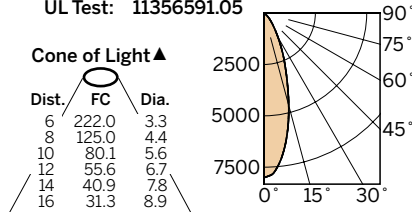


### -5000L Option -SPT

Lumens: 5163  
 Beam: ~16°  
 SC: 0.3  
 LPW: 86  
 Efficiency: 86.8%  
 UL Test: 11356591.02

**Total System Watts 59.8**

| CANDLEPOWER DISTRIBUTION |       |       |       |       |       |  |
|--------------------------|-------|-------|-------|-------|-------|--|
|                          | 0.0   | 22.5  | 45.0  | 67.5  | 90.0  |  |
| 0                        | 39540 | 39540 | 39540 | 39540 | 39540 |  |
| 5                        | 30210 | 30210 | 30210 | 30210 | 30210 |  |
| 15                       | 5135  | 5135  | 5135  | 5135  | 5135  |  |
| 25                       | 1473  | 1473  | 1473  | 1473  | 1473  |  |
| 35                       | 517   | 517   | 517   | 517   | 517   |  |
| 45                       | 234   | 234   | 234   | 234   | 234   |  |
| 55                       | 38    | 38    | 38    | 38    | 38    |  |
| 65                       | 5     | 5     | 5     | 5     | 5     |  |
| 75                       | 3     | 3     | 3     | 3     | 3     |  |
| 85                       | 3     | 3     | 3     | 3     | 3     |  |
| 90                       | 3     | 3     | 3     | 3     | 3     |  |

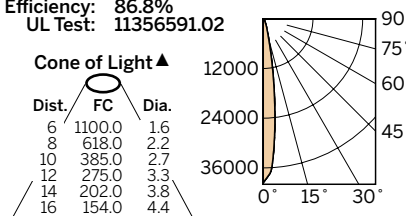


## -4000L Option -SPT

Lumens: 4130  
 Beam: ~16°  
 SC: 0.3  
 LPW: 93  
 Efficiency: 86.6%  
 UL Test: 11356591.06

**Total System Watts 44.5**

| CANDLEPOWER DISTRIBUTION |       |       |       |       |       |
|--------------------------|-------|-------|-------|-------|-------|
|                          | 0.0   | 22.5  | 45.0  | 67.5  | 90.0  |
| 0                        | 31380 | 31380 | 31380 | 31380 | 31380 |
| 5                        | 24360 | 24360 | 24360 | 24360 | 24360 |
| 15                       | 4139  | 4139  | 4139  | 4139  | 4139  |
| 25                       | 1186  | 1186  | 1186  | 1186  | 1186  |
| 35                       | 414   | 414   | 414   | 414   | 414   |
| 45                       | 189   | 189   | 189   | 189   | 189   |
| 55                       | 25    | 25    | 25    | 25    | 25    |
| 65                       | 2     | 2     | 2     | 2     | 2     |
| 75                       | 1     | 1     | 1     | 1     | 1     |
| 85                       | 0     | 0     | 0     | 0     | 0     |
| 90                       | 0     | 0     | 0     | 0     | 0     |

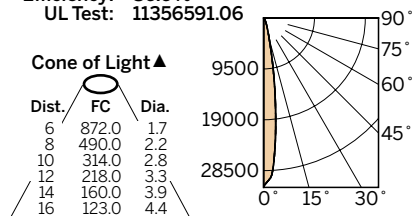


### -5000L Option -WFL

Lumens: 4306  
Beam: ~60°  
SC: 1.2  
LPW: 72  
Efficiency: 72.4%  
UL Test: 11356591.04

**Total System Watts 59.7**

| CANDLEPOWER DISTRIBUTION |      |      |      |      |      |      |
|--------------------------|------|------|------|------|------|------|
|                          | 0.0  | 22.5 | 45.0 | 67.5 | 90.0 |      |
| 0                        | 3000 | 3000 | 3000 | 3000 | 3000 | 3000 |
| 5                        | 2955 | 2955 | 2955 | 2955 | 2955 | 2955 |
| 15                       | 2535 | 2535 | 2535 | 2535 | 2535 | 2535 |
| 25                       | 2462 | 2462 | 2462 | 2462 | 2462 | 2462 |
| 35                       | 1901 | 1901 | 1901 | 1901 | 1901 | 1901 |
| 45                       | 1014 | 1014 | 1014 | 1014 | 1014 | 1014 |
| 55                       | 210  | 210  | 210  | 210  | 210  | 210  |
| 65                       | 6    | 6    | 6    | 6    | 6    | 6    |
| 75                       | 2    | 2    | 2    | 2    | 2    | 2    |
| 85                       | 0    | 0    | 0    | 0    | 0    | 0    |
| 90                       | 0    | 0    | 0    | 0    | 0    | 0    |

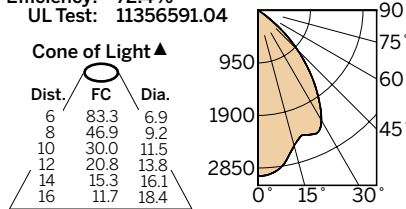


### -4000L Option -WFL

Lumens: 3417  
 Beam: ~59°  
 SC: 1.1  
 LPW: 77  
 Efficiency: 71.7%  
 UL Test: 11356591.08

**Total System Watts 44.6**

| CANDLEPOWER DISTRIBUTION |      |      |      |      |      |
|--------------------------|------|------|------|------|------|
|                          | 0.0  | 22.5 | 45.0 | 67.5 | 90.0 |
| 0                        | 2383 | 2383 | 2383 | 2383 | 2383 |
| 5                        | 2352 | 2352 | 2352 | 2352 | 2352 |
| 15                       | 2021 | 2021 | 2021 | 2021 | 2021 |
| 25                       | 1990 | 1990 | 1990 | 1990 | 1990 |
| 35                       | 1514 | 1514 | 1514 | 1514 | 1514 |
| 45                       | 802  | 802  | 802  | 802  | 802  |
| 55                       | 165  | 165  | 165  | 165  | 165  |
| 65                       | 5    | 5    | 5    | 5    | 5    |
| 75                       | 1    | 1    | 1    | 1    | 1    |
| 85                       | 0    | 0    | 0    | 0    | 0    |
| 90                       | 0    | 0    | 0    | 0    | 0    |

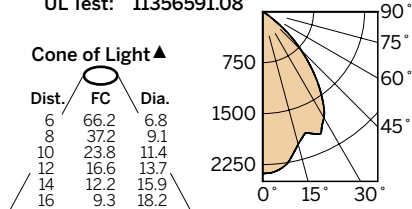

▲ **Cone of Light Key**  
Dia. (in ft.) shown is where FC value is half the FC at nadir.

**Dist.** Distance (Ft.) from fixture  
**FC** Footcandles at nadir (0°)  
**Dia.** Circle of light at 50% of FC

**See following page for -2500L performance**

LED manufacturers maintain a tolerance of +/-7% on flux (lumens) and power (electrical) measurements.

Detailed Photometry - Installed Fixture

Photometry from UL Verification Services, Allentown, PA

SRR-07604-2500L PERFORMANCE


-2500L STANDARD (MFL)

Lumens: 2703  
Beam: ~50°  
SC: 0.9  
LPW: 73  
Efficiency: 72.7%  
UL Test: 1259180

Total System Watts 36.9

Cone of Light ▲

| Dist. | FC   | Dia. |
|-------|------|------|
| 6     | 81.1 | 5.6  |
| 8     | 45.6 | 7.5  |
| 10    | 29.2 | 9.4  |
| 12    | 20.3 | 11.3 |
| 14    | 14.9 | 13.2 |
| 16    | 11.4 | 15.0 |



| CANDLEPOWER DISTRIBUTION |      |      |      |      |      |
|--------------------------|------|------|------|------|------|
|                          | 0.0  | 22.5 | 45.0 | 67.5 | 90.0 |
| 0                        | 2921 | 2921 | 2921 | 2921 | 2921 |
| 5                        | 2904 | 2904 | 2904 | 2904 | 2904 |
| 15                       | 2570 | 2570 | 2570 | 2570 | 2570 |
| 25                       | 1986 | 1986 | 1986 | 1986 | 1986 |
| 35                       | 920  | 920  | 920  | 920  | 920  |
| 45                       | 247  | 247  | 247  | 247  | 247  |
| 55                       | 44   | 44   | 44   | 44   | 44   |
| 65                       | 3    | 3    | 3    | 3    | 3    |
| 75                       | 1    | 1    | 1    | 1    | 1    |
| 85                       | 0    | 0    | 0    | 0    | 0    |
| 90                       | 0    | 0    | 0    | 0    | 0    |


-2500L Option -SPT

Lumens: 2760  
Beam: ~17°  
SC: 0.3  
LPW: 74  
Efficiency: 74.3%  
UL Test: 1259178

Total System Watts 37.3

Cone of Light ▲

| Dist. | FC    | Dia. |
|-------|-------|------|
| 6     | 326.0 | 1.8  |
| 8     | 184.0 | 2.4  |
| 10    | 118.0 | 3.1  |
| 12    | 81.6  | 3.7  |
| 14    | 60.0  | 4.3  |
| 16    | 45.9  | 4.9  |



| CANDLEPOWER DISTRIBUTION |       |       |       |       |       |
|--------------------------|-------|-------|-------|-------|-------|
|                          | 0.0   | 22.5  | 45.0  | 67.5  | 90.0  |
| 0                        | 11750 | 11750 | 11750 | 11750 | 11750 |
| 5                        | 8900  | 8900  | 8900  | 8900  | 8900  |
| 15                       | 2961  | 2961  | 2961  | 2961  | 2961  |
| 25                       | 1282  | 1282  | 1282  | 1282  | 1282  |
| 35                       | 613   | 613   | 613   | 613   | 613   |
| 45                       | 247   | 247   | 247   | 247   | 247   |
| 55                       | 24    | 24    | 24    | 24    | 24    |
| 65                       | 3     | 3     | 3     | 3     | 3     |
| 75                       | 1     | 1     | 1     | 1     | 1     |
| 85                       | 1     | 1     | 1     | 1     | 1     |
| 90                       | 1     | 1     | 1     | 1     | 1     |


-2500L Option -WFL

Lumens: 2703  
Beam: ~50°  
SC: 0.9  
LPW: 73  
Efficiency: 72.7%  
UL Test: 1259180

Total System Watts 36.9

Cone of Light ▲

| Dist. | FC   | Dia. |
|-------|------|------|
| 6     | 81.1 | 5.6  |
| 8     | 45.6 | 7.5  |
| 10    | 29.2 | 9.4  |
| 12    | 20.3 | 11.3 |
| 14    | 14.9 | 13.2 |
| 16    | 11.4 | 15.0 |



| CANDLEPOWER DISTRIBUTION |      |      |      |      |      |
|--------------------------|------|------|------|------|------|
|                          | 0.0  | 22.5 | 45.0 | 67.5 | 90.0 |
| 0                        | 2921 | 2921 | 2921 | 2921 | 2921 |
| 5                        | 2904 | 2904 | 2904 | 2904 | 2904 |
| 15                       | 2570 | 2570 | 2570 | 2570 | 2570 |
| 25                       | 1986 | 1986 | 1986 | 1986 | 1986 |
| 35                       | 920  | 920  | 920  | 920  | 920  |
| 45                       | 247  | 247  | 247  | 247  | 247  |
| 55                       | 44   | 44   | 44   | 44   | 44   |
| 65                       | 3    | 3    | 3    | 3    | 3    |
| 75                       | 1    | 1    | 1    | 1    | 1    |
| 85                       | 0    | 0    | 0    | 0    | 0    |
| 90                       | 0    | 0    | 0    | 0    | 0    |

▲ Cone of Light Key

Dist. Distance (Ft.) from fixture  
FC Footcandles at nadir (0°)  
Dia. Circle of light at 50% of FC

Dist. Distance (Ft.) from fixture  
FC Footcandles at nadir (0°)  
Dia. Circle of light at 50% of FC

LED manufacturers maintain a tolerance of +/-7% on flux (lumens) and power (electrical) measurements.

Symphony Driver Modules

Fully Digital Controlled Power Source for LED Luminaires

Mounted in Kirlin's **SYM-CABNT**

Drivers wired in series




| Driver Module                                | Maximum Capacity              | Fixture Load Examples                                                                                                                                           |
|----------------------------------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DVR-1400A                                    | Qty 1: 2500L Luminaires       | <ul style="list-style-type: none"><li>Qty 1: SRR-07604-2500L</li></ul>                                                                                          |
| DVR-1400B<br>*Not available with DMX dimming | Up to Qty 2: 2500L Luminaires | <ul style="list-style-type: none"><li>Qty 1: SRR-07604-2500L</li><li>Qty 2: SRR-07604-2500L</li><li>Qty 1: SRR-07604-2500L and Qty 1: SRR-07612-2500L</li></ul> |
| DVR-1050A                                    | Qty 1: 4000L Luminaires       | <ul style="list-style-type: none"><li>Qty 1: SRR-07604-4000L</li></ul>                                                                                          |
| DVR-1400B<br>*Not available with DMX dimming | Qty 1: 5000L Luminaires       | <ul style="list-style-type: none"><li>Qty 1: SRR-07604-5000L</li></ul>                                                                                          |
| DVR-1400A                                    | Qty .5: 6500L Luminaires      | <ul style="list-style-type: none"><li>Qty 1: SRR-07604-6500L requires Qty 2: DVR-1400A</li></ul>                                                                |

# Classic Glow Rings: Option -33 for Symphony Remote Driver Series

To order a Kirlin Glow Ring, begin by adding -33 to the product number. Then, configure your Glow Ring by selecting each of the 7 design elements listed below:

(Example: SRR-07604-2500L-30K-**33-GLM-1L-FRR-ROF-SIF-ROS-SIS**)

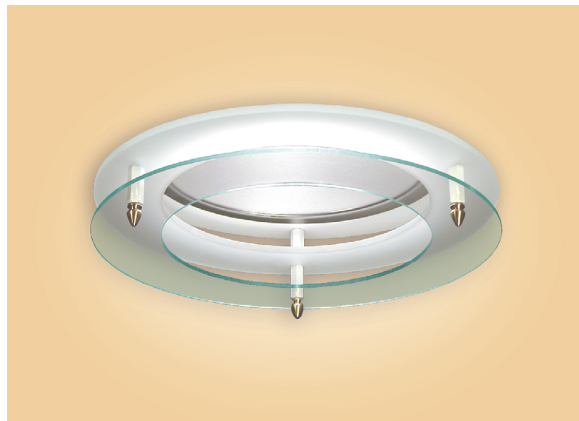

1. Ring Material  
(choose one)



Glass (-GLM)




Acrylic (-ACM)




Custom (-CUM)


2. # of Rings  
(choose one)



1 Ring (1L)



2 Rings (-2L)



3 Rings (-3L)


3. Ring Design  
(choose one)




Frosted Ring (-FRR)




Clear Ring (-CRR)



Solid Disk (-SDR)




Frosted Center (-FCR)



Frosted Disk (-FDR)

4. Finial Design  
(choose one)



Round (-ROF)



Knurled (-KNF)



Cone (-COF)

5. Finial Color  
(choose one)



Brass (-BRF)



Silver (-SIF)



Black (-BLF)




White (-WHF)




Custom (-CUF)

6. Standoff Design  
(choose one)



Round (-ROS)



Hexagonal (-HOS)

7. Standoff Color  
(choose one)



Brass (-BRS)



Silver (-SIS)



Black (-BLS)



White (-WHS)



Custom (-CFS)

LED manufacturers maintain a tolerance of +/-7% on flux (lumens) and power (electrical) measurements.