


CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

Wayfinding Series

Lensed Steplight 3" x 7" Steplight • LED

Super Shallow • Type IC • Optional LED Filter Colors

LNT-03096

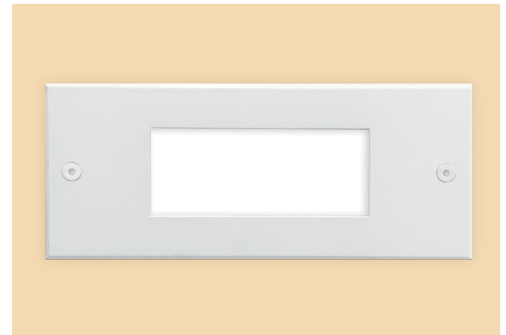

Specifications

LED

- White module (colored filters optional)
- 3500°K standard
- 5.5 system watts - energy efficient, uniform, cool

LED Power Supply/Driver

- Max 13 volt DC and 4 watt fixed output; electronically stabilized
- Minimum operating temperature -4°F (-20°C)
- 120-277 volt standard; load insensitive

Lens

- Translucent white 1/8" polycarbonate sealed to trim

Faceplate

- Gasketed aluminum frame pulls tight to wall

- White finish standard; optional colors
- Optional (white only) antimicrobial Kirlin BioGard™ finish; see Option -BG
- Tamper resistant available; see Options
- Removable for servicing

Housing: Shallow 2½" Depth

- Cool; acrylic enameled aluminum
- Rustproof: Exceeds 1000 hour ASTM 5% salt spray test
- Dissipates heat across entire surface area

Installation

- Recesses indoor or outdoor, covered locations
- Mounting holes on housing ends

UL, C-UL (Canada) Listings

- Damp or dry locations
- Type IC; approved for direct contact with insulation

FIVE YEAR Limited Warranty

- Complete standard fixture



Options and Ordering Configuration

(Example: LNT-03096-BL-37-26)



Required	Optional			
Model	Voltage/Battery Pack	Filter Colors	Faceplate Finishes	Other Options
LNT-03096	<p>(Blank): Universal 120-277 V</p> <p>-97: Other voltage input; consult factory</p> <p>-EI: Remote emergency inverter for 100% of rated lumens; Run time: 90+ minutes; 120 or 277V, 60Hz input only; specify voltage</p>	<p>(Blank): None</p> <p>-BL: Blue filter</p> <p>-GE: Green filter</p> <p>-OR: Orange filter</p> <p>-RA: Red/Amber filter</p> <p>-YE: Yellow filter</p> <p>-CF: Custom color filter (Rosco); specify</p>	<p>(Blank): Standard white finish</p> <p>-35: Silver (natural aluminum) acrylic enamel</p> <p>-37: Dark bronze acrylic enamel</p> <p>-38: Black acrylic enamel</p> <p>-BG: BioGard™ anti-microbial white</p> <p>-BKBG: BioGard™ anti-microbial black</p> <p>-94: Custom color; consult factory</p> <p>-94BG: BioGard™ anti-microbial custom color finish</p>	<p>(Blank): None</p> <p>-26: Faceplate secured to housing with two center pin tamperproof screws; tamperproof tool included</p> <p>-99: Special modification; consult factory</p>

Dimensions

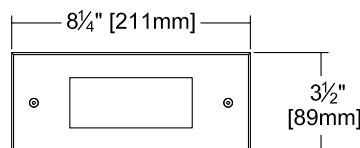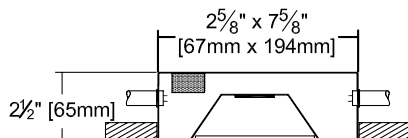

LED Filter Colors



-RA

-OR

-YE




-GR

-BL

-CF


Photometry - Installed Complete Fixture

LM-79 IESNA Certified Photometry from Independent Lab

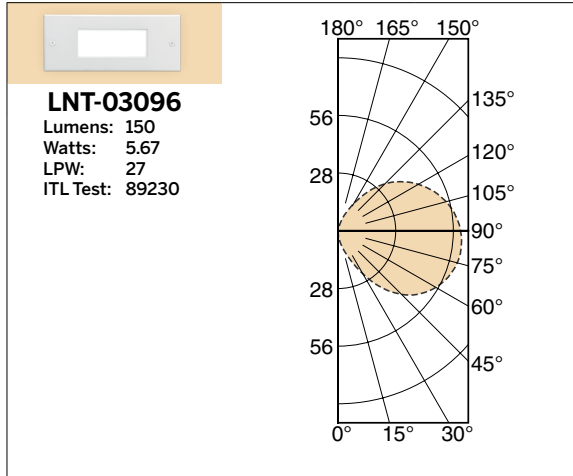

Footcandle Performance On the Floor - Top View

ITL Test: 89230

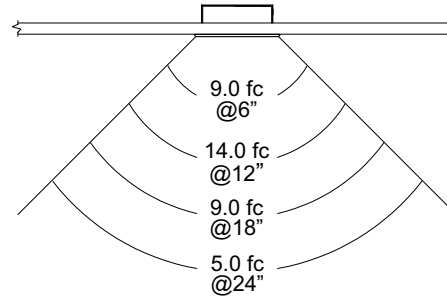

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR FIVE YEARS FROM DATE OF PURCHASE. INSTALLATION, IN-NORMAL USE, MANUFACTURER AT HIS OPTION WILL REPLACE OR REPAIR SUCH FIXTURE OR RETURN THE PURCHASER TO THE DATE OF PURCHASE AND DEDUCTIVE FIXTURE AT THE OFFICE OF MANUFACTURER WITHIN THE YEARS OF ORIGINAL SHIPMENT. LIABILITY OF MANUFACTURER IS LIMITED TO THE FOREGOING AND MANUFACTURER SHALL NOT BE LIABLE FOR ANY OTHER DAMAGES, DIRECT OR INDIRECT, SUSTAINED OR SUFFERED BY PURCHASER OR ANY PERSON. THIS WARRANTY IS APPLIED TO THE BUYER IN PLACE OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED. SELLER DOES NOT WARRANT AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE, NOR WILL ANY ORAL STATEMENT CONSTITUTE A WARRANTY OR AMEND THIS SPECIFIC WARRANTY. ABNORMAL USE, ABUSE OF THE FIXTURE, IMPROPER INSTALLATION, OR REPAIR OR MODIFICATION OF THE FIXTURE WITHOUT PRIOR WRITTEN AUTHORIZATION FROM THE MANUFACTURER WILL RENDER THE WARRANTY VOID.

LATTITUDES
NOVEMBER 2024