

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

Wayfinding Series

"Brick Light" 3" x 8" Nightlight • LED

50,000 Hour Rated Life • Type IC • Optional LED Filter Colors

Specifications

LED

- White module (colored filters optional)
- 3500°K standard
- 5.5 system watts - energy efficient, uniform, cool

LED Power Supply/Driver

- Max 13 volt DC and 4 watt fixed output; electronically stabilized
- Minimum operating temperature -4°F (-20°C)
- 120-277 volt standard; load insensitive

Lens

- Clear poly lenses behind louver

Faceplate

- Seamless die-formed gasketed louvered door pulls tight to wall
- White finish standard; optional colors

- Optional (white only) antimicrobial Kirlin BioGard™ finish; see Option-BG
- Tamper resistant available; see Options
- Removable for servicing


Housing: Shallow 2½" Depth

- Cool; acrylic enameled aluminum
- Rustproof: Exceeds 1000 hour ASTM 5% salt spray test
- Dissipates heat across entire surface area

Installation

- Recesses in wall indoor or outdoor, covered locations
- Mounting holes on housing ends
- Adjustable mounting brackets allow installation between adjoining studs up to 22" apart

LNT-03098

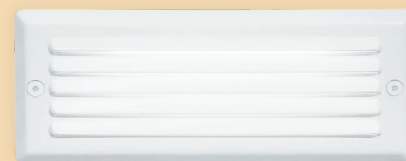

UL, C-UL (Canada) Listings

- Damp or dry locations
- See Option -WL for wet locations
- Type IC; approved for direct contact with insulation

FIVE YEAR Limited Warranty

- Complete standard fixture





Options and Ordering Configuration

(Example: LNT-03098-BL-37-26)

Required	Optional			
Model	Voltage/Battery Pack	Filter Colors	Louvered Door Finishes	Other Options
LNT-03098	(Blank): Universal 120-277 V -97: Other voltage input; consult factory -EI: Remote emergency inverter for 100% of rated lumens; Run time: 90+ minutes; 120 or 277V, 60Hz input only; specify voltage	(Blank): None -BL: Blue filter -GE: Green filter -OR: Orange filter -RA: Red/Amber filter -YE: Yellow filter -CF: Custom color filter (Rosco); specify	(Blank): Standard white finish -35: Silver (natural aluminum) acrylic enamel -37: Dark bronze acrylic enamel -38: Black acrylic enamel -94: Custom color; consult factory -BG: BioGard™ anti-microbial white	(Blank): None -26: Faceplate secured to housing with two center pin tamperproof screws; tamperproof tool included -99: Special modification; consult factory -WL: UL Wet Location listed; not available with switch or receptacle options

Dimensions

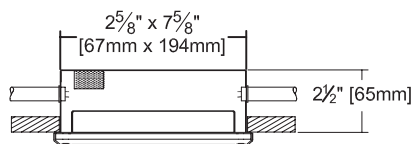

LED Filter Colors



-RA

-OR

-YE




-GR

-BL

-CF


Photometry - Installed Complete Fixture

LM-79 IESNA Certified Photometry from Independent Lab

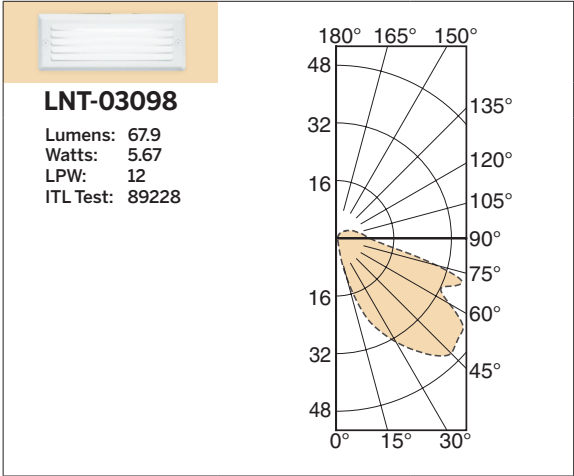

Footcandle Performance On the Floor - Top View

ITL Test: 89228

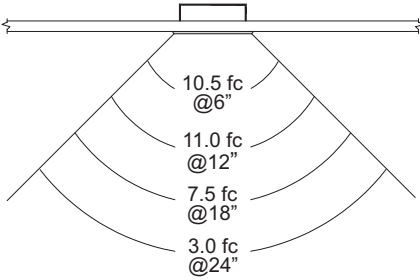

LIMITED WARRANTY: KIRLIN LIGHTING FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR FIVE YEARS FROM DATE OF PURCHASE. INSTALLATION, IN NORMAL USE, MANUFACTURER AT HIS OPTION WILL REPLACE OR REPAIR SUCH FIXTURE OR REFUND THE PURCHASE PRICE ON PRESENTATION OF PROOF OF PURCHASE AND DEFECTIVE FIXTURE AT THE OFFICE OF MANUFACTURER WITHIN FIVE YEARS OF ORIGINAL SHIPMENT. LIABILITY OF MANUFACTURER IS LIMITED TO THE FOREGOING, AND MANUFACTURER SHALL NOT BE LIABLE FOR ANY OTHER DAMAGES, DIRECT OR INDIRECT, SUSTAINED OR SUFFERED BY PURCHASER OR ANY PERSON. THIS WARRANTY IS SUPPLIED TO THE BUYER IN PLACE OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED. SELLER DOES NOT WARRANT AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE, NOR WILL ANY ORAL STATEMENT CONSTITUTE A WARRANTY, ABNORMAL USE, ABUSE OF THE FIXTURE, IMPROPER INSTALLATION, OR REPAIR, OR MODIFICATION OF THE FIXTURE WITHOUT PRIOR WRITTEN AUTHORIZATION FROM THE MANUFACTURER WILL RENDER THE WARRANTY VOID.