

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

Lighting for Patient Spaces

Hitsville Task Light

Available with: Touch Dimming, Adjustable Light Engine, IP66 Rating, Tamper-Proof, Ligature-Resistant Design

Specifications

LED Source & Performance

- Task light module with specifiable CCT and 90+ CRI
- Select beam distribution, see chart
- Module position is adjustable with Option -AL
- Maximum 5.9 system watts
- Up to 300 lumens delivered

LED Power Supply/Driver

- Indoor/Outdoor: -20°C to 60°C (-22°F to 140°F)
- 0-10V CCR dimming standard (100-1.0%)
- 120-277 volt, load insensitive
- For continuous capacitive touch dimming switch, see Option -TSD. Touch dimming will not be fully functional when fixture is wet.

Lens

- 1/8" clear polycarbonate

Faceplate

- Robust cast aluminum faceplate available in obround or rectangle

- Discreet fastener placement along lower edge
- Mounting features pull faceplate tight to wall, with gasketing around edge and at lens opening
- Optional tamper resistant screws available
- White finish standard; optional colors
- Optional white BioGard™ antimicrobial finish

Housing

- 16 GA. galvanized housing
- All installations must use Kirlin-provided housing for listings and warranty to be valid
- IK10 impact and vandal resistant when behavioral mounting bracket is used

Installation

- Recessed in wall indoor or outdoor, covered locations

MTT-03TSK



- Universal mounting bracket supports both -PLL and -RCT faceplates for field replacement

UL, C-UL (Canada) Listings


- Wet, damp or dry locations
- Type IC; approved for direct contact with insulation

FIVE YEAR Limited Warranty

- Complete standard fixture


Options and Ordering Configuration

(Example: MTT-03TSK-300L-PLL-NFL-30K-BG-26)

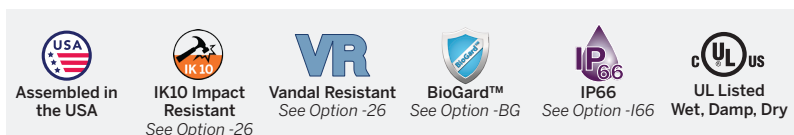

Must Specify					Optional		
Model	Lumens	Trim	Beam	CCT & CRI	Dimming	Faceplate Options	Other Options
MTT-03TSK							
	-300L -150L	-PLL: Oval/pill shape -RCT: Rectangular	-NFL -MFL -WFL	-30K: 3000°K, 90+ CRI -35K: 3500°K, 90+ CRI -40K: 4000°K, 90+ CRI	(Blank): Standard 0-10V dimming to 1% -TSD: Touch sensitive dimming switch flush-mounted on faceplate	(Blank): Standard white finish -35: Silver acrylic enamel -37: Dark bronze acrylic enamel -38: Black acrylic enamel -94: Custom color; consult factory -BG: BioGard™ anti-microbial white	(Blank): None -26: Vandal resistant with 1/4" poly lens, tamperproof screws, and additional wall bracing; tamperproof tool included -99: Special modification; consult factory -I66: IP66 rated faceplate and lens -AL: Adjustable light engine


Touch Sensitive Dimming Switch

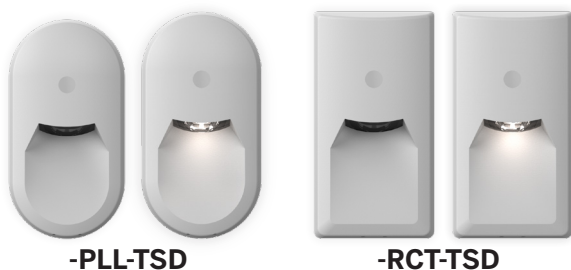


With option TSD, the Hitsville task light is controllable by human touch. Tapping the switch will turn the task light on (at the previous light level) or off. Holding the switch will continuously dim the task light down to 1% output, and then cycle back up to 100% output.

Dimensions

-TSD switch
0.5" dia.

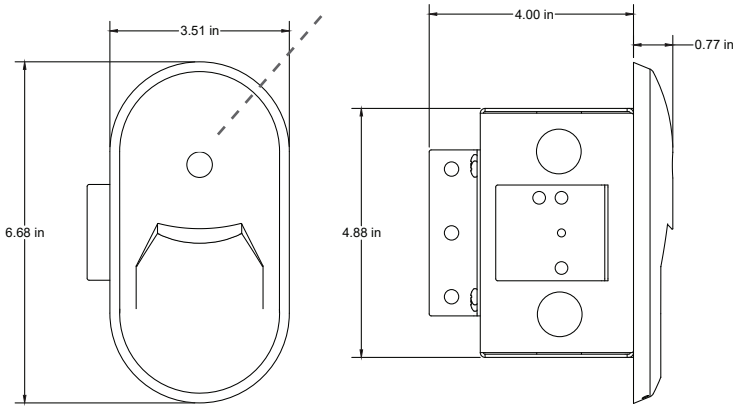


Oval Task Light

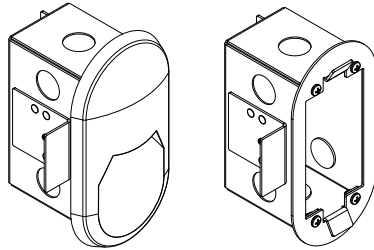


Shown with Option -26 wall bracing.
Must use Kirlin-provided housing. Wall cut-out dimensions: 4.875" H x 2.375" W.

-TSD switch
0.5" dia.

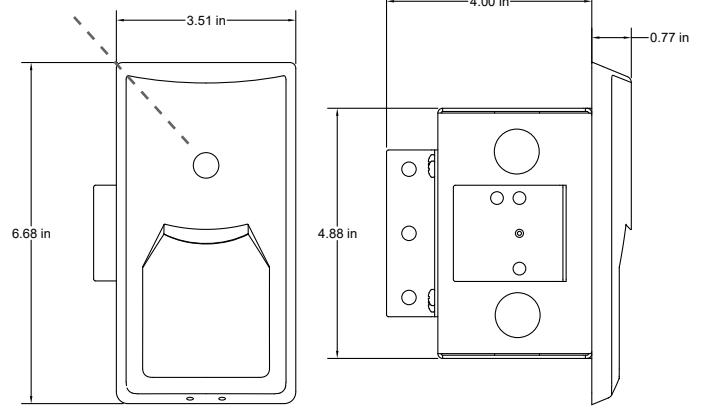

Rectangular Task Light

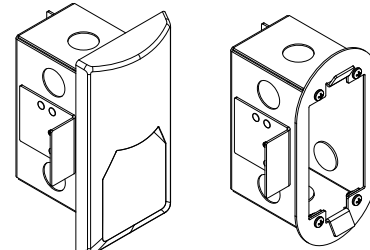

Shown with Option -26 wall bracing.
Must use Kirlin-provided housing. Wall cut-out dimensions: 4.875" H x 2.375" W.

Performance

Photometry from L.L.I., Allentown, PA

LM-79 IESNA Certified Photometry from Independent Lab

