

CATALOG #		TYPE	
JOB NAME	WATTAGE	VOLTAGE	

Lighting for Patient Spaces

Empower 0-10V Wall Station for Behavioral Health

Ligature resistant • 1, 2, or 3 button configurations • Empowers patients to have safe and secure control of their environment

Specifications

Wall Station Features

- Wall-mounted lighting controller
- Up to 3 buttons in a single-gang faceplate with reducer plate, junction box provided by others, details in the dimensions
- Touch sensitive on/off and dimming from 100% - 1% with the touch of a button
- Flush-mounted buttons
- IK10 impact and vandal resistant
- Easily cleaned with standard hospital-grade cleaning supplies

Faceplate

- Robust aluminum faceplate with rounded corners
- Tamper-resistant screws with center pin knockout, L key included
- White finish standard; optional colors
- Optional BioGard™ antimicrobial finishes

Buttons

- One, two, or three button configurations
- Smooth buttons sit flush with the faceplate for added safety
- Stanless steel buttons are naturally antimicrobial
- Holding the switch will continuously dim the lighting zone down to the driver's lowest output, and then cycle back up to 100% output

Tapping the switch will turn the lighting zone on (at the previous light level) or off

Optional laser etching for lighting zone labeling, consult factory for details

Power Input

120-277V standard

Installation

Recessed into a wall indoor or outdoor, covered locations

Mounting

- Electrical Box (Not Included), see details on pages 2-3
- Reducer Plate provided by Kirlin as needed

IK10 Impact

Vandal Resistant

UL, C-UL (Canada) Listings

· Wet, damp, or dry locations

FIVE YEAR Limited Warranty

· Complete switch



Button Configurations

VCD-03010



BioGard¹







Options and Ordering Configuration


(Example: VCD-03010-3SB-BG-LBL)

Must Specify		Optional		
Model	Buttons	Dimming	Faceplate Finish Options	Other Options
VCD-03010				
	-ONE: One Button Configuration	(Blank): 0-10V dimming	(Blank): Standard white finish	(Blank): None
	-TWO: Two Button Configuration	-99: Special modification; consult factory	Faceplate Finishes	-99: Special modification; consult factory
-THR: Three Button Configuration			-35: Silver enamel	
		-37: Dark Bronze enamel	-LBL: Etched labels for the buttons; Specify label for each button; Max 5 characters each or icons; consult factory	
		-38: Black enamel		
		-BG: BioGard anti-microbial white		
			-BKBG: BioGard anti-microbial black	
			-94BG: BioGard anti-microbial custom color finish	
			-94: Custom color; consult factory	


Kirlin reserves the right to make changes without further notice to any products herein to improve reliability, function, or design. Kirlin does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.

Dimensions

-ONE: One Button Configuration










NOTE: SECURITY HARDWARE INCLUDED WITH CONTROL SYSTEM


Note: No backer plate or collar required for single gang set up, plate mounts directly to box.
































Recommended Custom Colors

The below colors match Kirlin's Scenic Patterns for a cohesive look throughout the space. To be used with option code -94.

Calming Colors

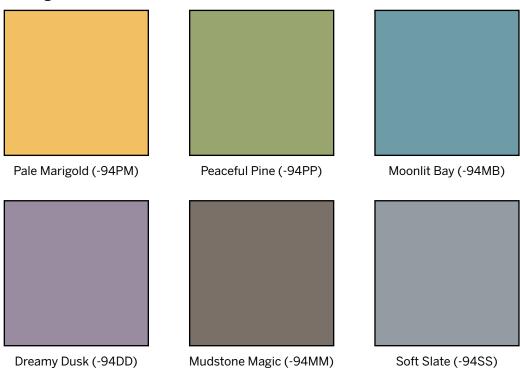

Vibrant Colors

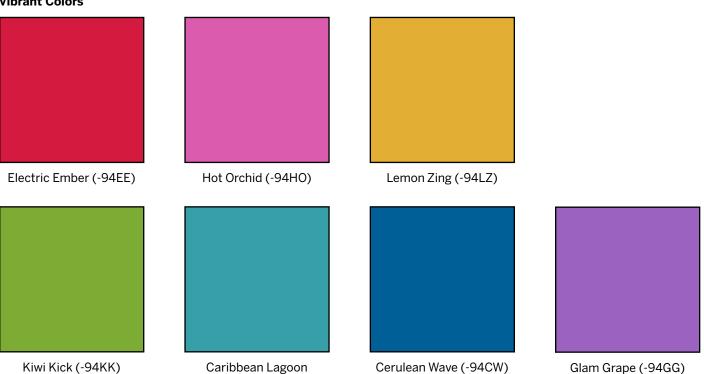

Due to variations in monitor settings and screen resolutions, the appearance of colors, textures, and details in the images may differ from the actual product.

(-94CL)