

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

# Lighting for Patient Spaces

## Hitsville Thru-the-Wall Nightlight

Type IC • Wet Listed • Available with: IP66 Rating, Dimming, Photocell, Occupancy Sensor, and Tamper-Proof Ligature-Resistant Design

### Specifications

#### LED Source & Performance

- **Must Specify:** Static white LED source, or static wavelength ● 590nm (amber), ● 617nm (red/orange)
- Maximum 4.0 system watts (2.0 watts for each face)
- Color filters available (recommended for use with static white sources)

#### LED Power Supply/Driver

- Standard construction: non-dimmable
- 1% dimming available, see Option -D1
- 120-277 volt, load insensitive

#### Lenses

- 1/8" clear polycarbonate with anti-pixelation film behind
- Optional 1/4" polycarbonate lens with Option -26

#### Faceplates

- Robust cast aluminum faceplates available in obround or rectangle
- Discreet fastener placement along lower edge
- Mounting features pull faceplates tight to wall, with gasketing around edge and at lens openings

- Optional tamper resistant screws available
- White finish standard; optional colors
- Optional white BioGard™ antimicrobial finish

#### Housing

- Adjustable nesting collar housing for various wall thicknesses from 4-1/4" to 8" standard
- 16 GA galvanized housing
- All installations must use Kirlin-provided housing for listings and warranty to be valid
- IK10 impact and vandal resistant when behavioral mounting bracket is used (see Option -26)

#### Installation

- One electrical connection for two nightlights saves time and installation costs
- Recessed in wall indoor or outdoor, covered locations
- Universal mounting bracket supports both -PLL and -RCT faceplates for field replacement

## MTT-03NTW



#### UL, C-UL (Canada) Listings


- Wet, damp or dry locations
- Type IC; approved for direct contact with insulation

#### FIVE YEAR Limited Warranty


- Complete standard fixture



### Faceplate Options

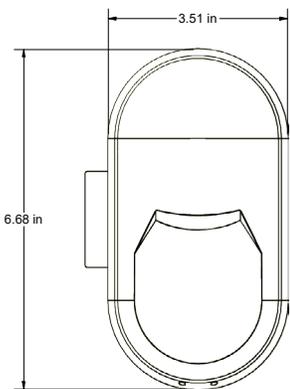

Oval Nightlight -PLL

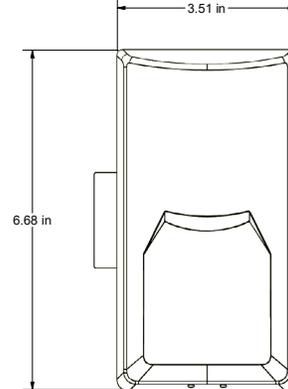

Rectangular Nightlight -RCT

## Options and Ordering Configuration

(Example: MTT-03NTW-HO-RCT-590-OCC2-BG-26-BA)

Must Specify				Optional			
Model	Lumens	Trim	CCT & CRI	Control	Filter Colors	Faceplate Options	Other Options
MTT-03NTW							
	<p><b>-HO:</b> High output</p> <p><b>-LO:</b> Low output</p>	<p><b>-PLL:</b> Oval/pill shape</p> <p><b>-RCT:</b> Rectangular</p>	<p><b>-27K:</b> 2700°K, 80+ CRI</p> <p><b>-30K:</b> 3000°K, 80+ CRI</p> <p><b>-35K:</b> 3500°K, 80+ CRI</p> <p><b>-40K:</b> 4000°K, 80+ CRI</p> <p><b>-590:</b> Static wavelength 590nm LED's</p> <p><b>-617:</b> Static wavelength 617nm LED's</p>	<p><b>(Blank):</b> Non-dimmable</p> <p><b>-D1:</b> 0-10V 1.0% dim</p> <p><b>-D40:</b> -40° non-dimming driver</p> <p><b>-OCC1:</b> Integral PIR occupancy sensor installed on one side; 30 second delay; non-dimmable; Not available with Option -I66</p> <p><b>-OCC2:</b> Integral PIR occupancy sensor installed on both sides; 30 second delay; non-dimmable; Not available with Option -I66</p> <p><b>-PC1:</b> Photocell installed on one side; illuminates nightlight when room is dark; non-dimmable</p> <p><b>-PC2:</b> Photocell installed on both sides; illuminates nightlight when room is dark; non-dimmable</p> <p><b>-PCOC1:</b> Photocell/Occupancy Sensor combination installed on one side; illuminates nightlight when room is dark and motion is detected; non-dimmable; consult factory for use with Option -I66</p> <p><b>-PCOC2:</b> Photocell/Occupancy Sensor combination installed on both sides; illuminates nightlight when room is dark and motion is detected; non-dimmable; consult factory for use with Option -I66</p>	<p><b>(Blank):</b> No filter</p> <p><b>-BL:</b> Blue filter</p> <p><b>-GE:</b> Green filter</p> <p><b>-OR:</b> Orange filter</p> <p><b>-RA:</b> Red/amber filter</p> <p><b>-YE:</b> Yellow filter</p> <p><b>-CF:</b> Custom color filter (Rosco); specify</p>	<p><b>(Blank):</b> Standard white finish</p> <p><b>-35:</b> Silver (natural aluminum) acrylic enamel</p> <p><b>-37:</b> Dark bronze acrylic enamel</p> <p><b>-38:</b> Black acrylic enamel</p> <p><b>-BG:</b> BioGard™ anti-microbial white</p> <p><b>-BKBG:</b> BioGard™ anti-microbial black</p> <p><b>-94:</b> Custom color; see page 3 for recommended custom colors; consult factory</p> <p><b>-94BG:</b> BioGard™ anti-microbial custom color finish; see page 3 for recommended custom colors; consult factory</p>	<p><b>(Blank):</b> None</p> <p><b>-26:</b> Vandal resistant with 1/4" poly lenses, tamperproof screws, and additional wall bracing; tamperproof tool included</p> <p><b>-99:</b> Special modification; consult factory</p> <p><b>-BA:</b> Buy America (BA, BAA) and Build America, Buy America (BABAA) compliant</p> <p><b>-I66:</b> IP66 rated faceplates and lenses; Not available with Options -OCC1, -OCC2, -PCOC1, -PCOC2</p>

## LED Filter Colors



**-RA**



**-OR**



**-YE**



**-GE**



**-BL**




**-CF**

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR FIVE YEARS FROM DATE OF PURCHASE. INSTALLED TO N.E.C. / IN-NORMAL USE. Manufacturer will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture to the offices of manufacturer within the years of original shipment. Liability of manufacturer is limited to the foregoing and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied; seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.


## Shallow Collar Position

Adjustable for various wall thicknesses from 4-1/4" to 6"

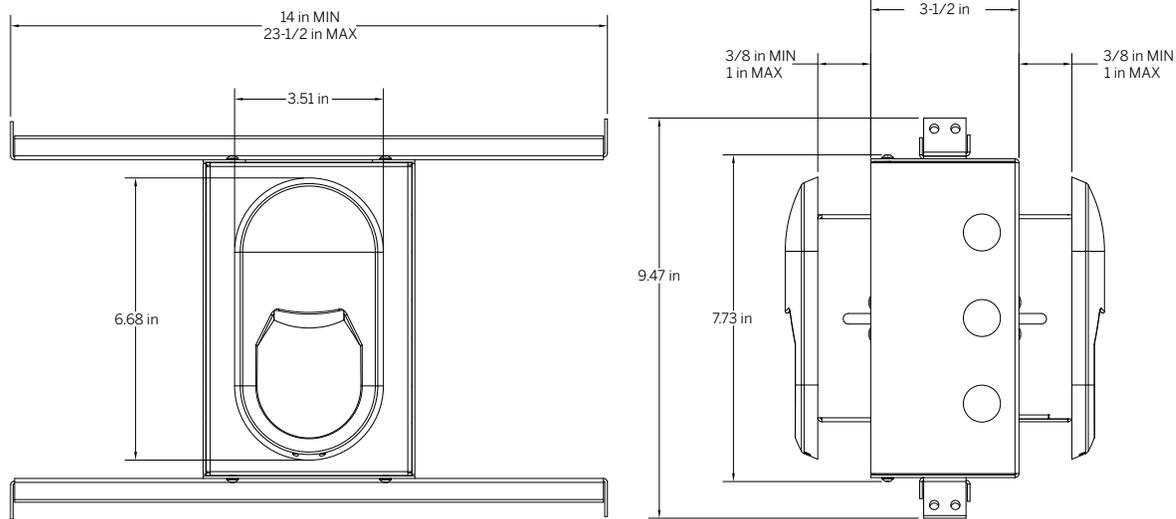


## Extended Collar Position

Adjustable for various wall thicknesses from 6-1/4" to 8"

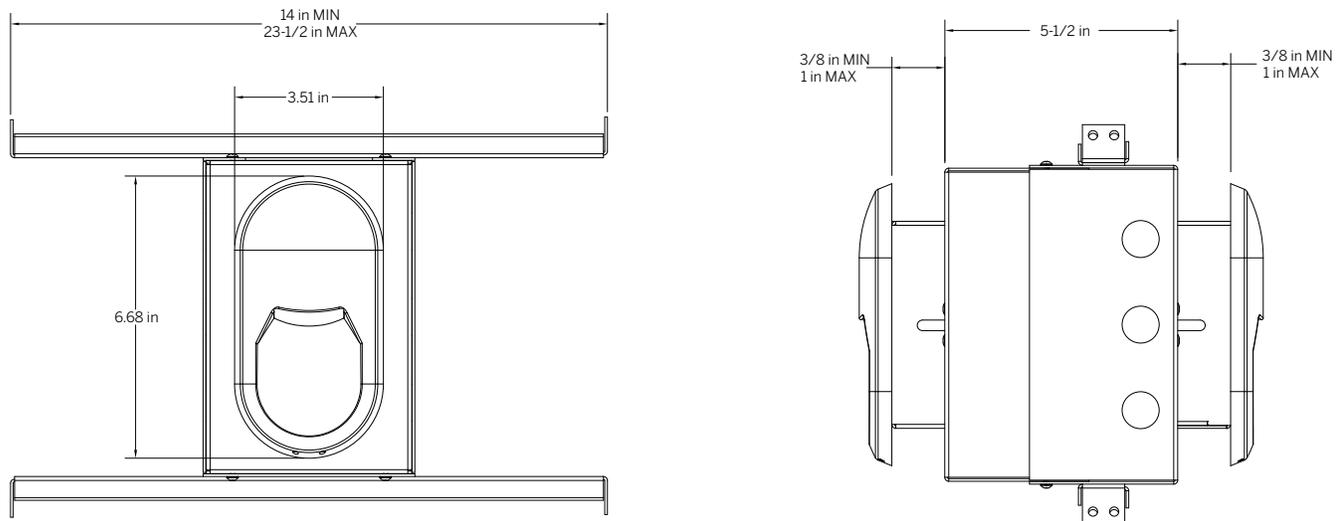

## Cutout Dimensions

Collar mounting holes for  
Vandal-Resistant Fixture  
(Option -26)







LIMITED WARRANTY: CATALOGUED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR FIVE YEARS FROM DATE OF PURCHASE. INSTALLATION, E.G., IN NORMAL USE. Manufacturer at his option will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the offices of manufacturer within the years of original shipment. Liability of manufacturer is limited to the foregoing and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is applied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair or modification of the fixture without prior written authorization from the manufacturer will render the warranty void. PATENT SPACES June 2025

## Performance for Each Side

Photometry from L.L.I., Allentown, PA

LM-79 IESNA Certified Photometry from Independent Lab

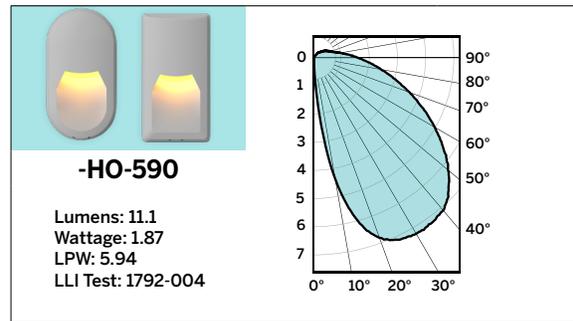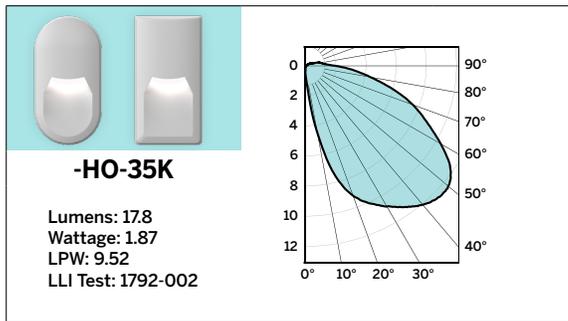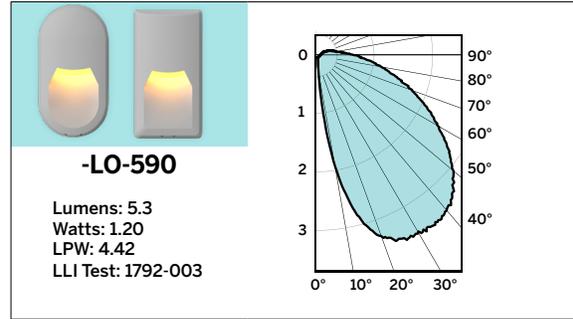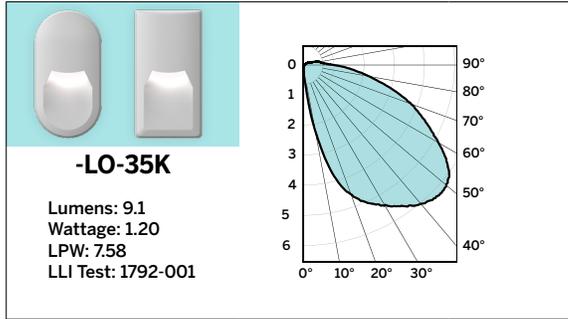

Total system watts is double what's shown to account for both sides of the thru-the-wall nightlight.


LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR FIVE YEARS FROM DATE OF PURCHASE. INSTALLATION, E.G., IN NORMAL USE. Manufacturer at his option will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture to the offices of manufacturer within the years of original shipment. Liability of manufacturer is limited to the foregoing and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is applied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.

PATIENT SPACES  
June 2025


## Recommended Custom Colors

The below colors match Kirlin's Scenic Patterns for a cohesive look throughout the space. To be used with option code -94.

### Calming Colors

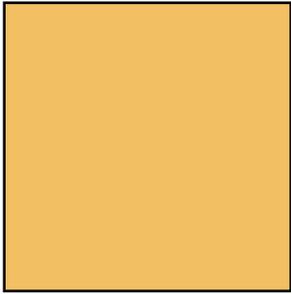


Pale Marigold (-94PM)

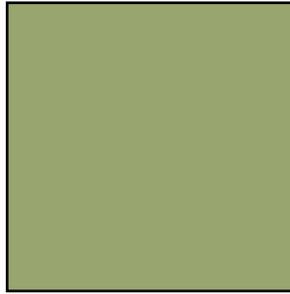

Peaceful Pine (-94PP)




Moonlit Bay (-94MB)

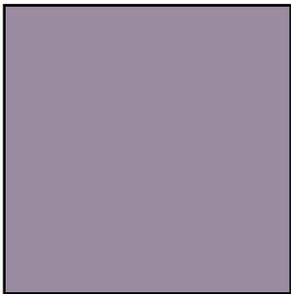

Dreamy Dusk (-94DD)




Mudstone Magic (-94MM)

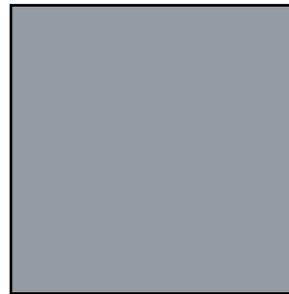


Soft Slate (-94SS)


### Vibrant Colors

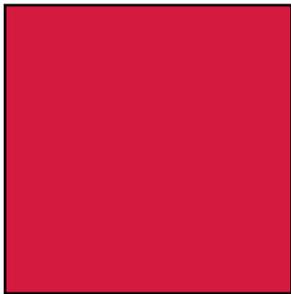


Electric Ember (-94EE)

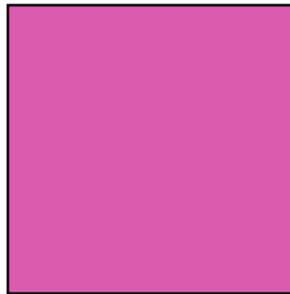

Hot Orchid (-94HO)

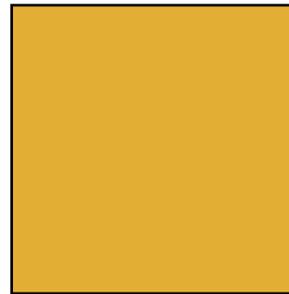

Lemon Zing (-94LZ)

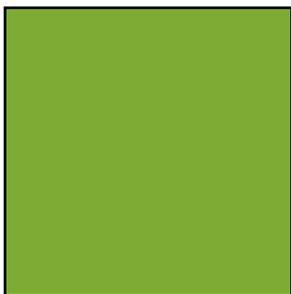


Kiwi Kick (-94KK)



Caribbean Lagoon (-94CL)



Cerulean Wave (-94CW)

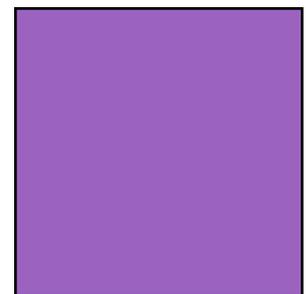

Glam Grape (-94GG)

Due to variations in monitor settings and screen resolutions, the appearance of colors, textures, and details in the images may differ from the actual product.