


CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

4" 1 MR16 50 WATT MAXIMUM

Type IC - IRR-04018

Open Appearance Lensed Adjustable Round • Low Voltage

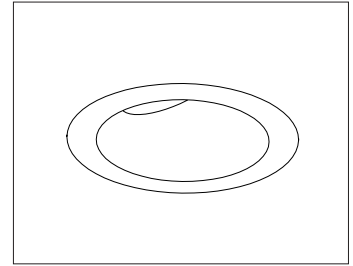

Specifications

Lamp and Optional Filter Holder

- Designed for one 12 volt MR16 lamp (by others): 50 watt maximum.
- For filter holder and up to 2 filters, see Options.

Lampholder

- Heat resistant GX5.3 base porcelain socket.
- 300°C rated double wipe nickel plated contacts provide secure fit and optimal conductivity.
- Securely mounted within aluminum heat sink: protects lamp base, maintains secure fit.
- Insulated lead wires suitable for 250°C operation.

Lamp Module - Center Beam Positioning

- Hot aiming by hand or screwdriver provides locking adjustability from 0° to 45° in precise 1° increments.
- Accommodates sloped ceilings up to 45°.
- Full 365° locking rotational disk indexed for optimal lamp-trim position.
- Black concealment shroud screens fixture interior.
- All aluminum for maximum heat dissipation

and cool operation of entire lamp-socket-trim module.

WhisperPack™ Encapsulated Transformer

- Exclusive WhisperPack™ isolates and envelops transformer with proprietary heat and sound absorbing material.
- Provides longer life and cooler, quieter operation. Easily accessible through ceiling aperture.
- Electronic dimmable stepdown (120V/12V) 90°C AC transformer. See Options for magnetic or toroidal versions and for 277 volt operation.

Trim

- Specular, clear aluminum self-flanged angle cut cone with tempered clear lens on top. Optional lenses, Softex finishes, colors, Glow Rings, white flange, or downlight cone versions available.

Acrylic Enameled Aluminum Housing

- Rustproof and corrosion resistant: Exceeds 1000 hour ASTM 5% salt spray test.
- Dual housing design includes air chamber for maximum heat dissipation.
- Cool operation: Extends life of all components.
- Entire luminaire easily serviced through aperture.
- Built-in plaster flange.
- For Air Tight or Top Access, see Options.

Outlet Box and Thermal Protection

- UL listed J-box with insulated removable cover. Prewired 14GA (NEC) with ½" and ¾" knockouts.
- Thermal protector (per current NEC) provides automatic cut-off if rated wattage is exceeded.

Installation

- Recesses indoor or outdoor in covered locations.
- Accommodates ceilings up to 1¼" thick.
- Hardware provided suitable for grid or wood joist ceilings with spacing from 14½" to 25½" with ⅝" vertical adjustability.
- For downlight cone instead, see Option -DL.

UL, C-UL (Canada) Listings


- Wet, damp or dry locations, covered ceilings.
- Type IC. Approved for direct contact with insulation.
- Through-branch conductors (4 #12 AWG 90°C).

Three Year Limited Warranty

- Complete standard fixture.

Performance at a Glance

IRR-04018: Type IC

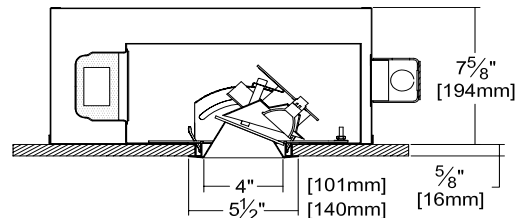

Ceiling Cut-out


5" Dia.




Type IC



Air Tight




IRR-04018
(50 Watt SP10)




EFFICIENCY: 69.4% (30°)
60.7% (45°)
ITL TEST #59002, 59165

IRR-04018
(50 Watt NFL25)



EFFICIENCY: 73.1% (30°)
71.2% (45°)
ITL TEST #59003, 59170

IRR-04018
(50 Watt FL35)



EFFICIENCY: 75.6% (30°)
72.7% (45°)
ITL TEST #59004, 59172



Exceptional
Energy
Efficiency

For downlight cone instead, see Option -DL

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

LOW VOLTAGE TUNGSTEN
HALOGEN LIGHTING

MAXIMUM WATTAGE

50

CATALOG NUMBER




IRR-04018

DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL
INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

Photometry - Installed Fixture


Photometry from I.T.L., Boulder, CO

D: Distance (in feet) to floor or wall.
 FC: Max. footcandles on surface within effective visual beam. (Visual beam is 50% of max. FC.)
 L: Effective visual beam length in feet.
 W: Effective visual beam width (in feet).
 CB: Distance (in feet) to center beam.

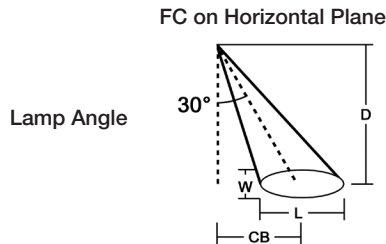

IRR-04018 (50 Watt)

LAMP: OSRAM SYLVANIA
 50MR16/IR/SP10/C
 TRIM: Open Appearance
 Specular
 EFFIC: 69.4% (30°)
 60.7% (45°)



D	FC	L	W	CB
4.0	522	1.0	0.8	2.3
6.0	232	1.5	1.3	3.5
7.0	171	1.8	1.5	4.0
8.0	131	2.0	1.7	4.6
9.0	103	2.3	1.9	5.2
10.0	84	2.5	2.1	5.8
12.0	58	3.0	2.5	6.9
14.0	43	3.5	2.9	8.1

ITL TEST: #59002


D	FC	L	W	CB
2.0	474	1.3	0.7	3.5
3.0	211	1.9	1.0	5.2
4.0	118	2.5	1.3	6.9
5.0	76	3.1	1.7	8.7
6.0	53	3.8	2.0	10.4
8.0	30	5.0	2.7	13.9
10.0	19	6.3	3.3	17.3
12.0	13	7.5	4.0	20.8

ITL TEST: #59002

D	FC	L	W	CB
2.0	1146	0.7	0.6	2.0
3.0	509	1.1	0.8	3.0
4.0	287	1.4	1.1	4.0
5.0	183	1.8	1.4	5.0
6.0	127	2.2	1.7	6.0
8.0	72	2.9	2.2	8.0
10.0	46	3.6	2.8	10.0
12.0	32	4.3	3.3	12.0

ITL TEST: #59165

LAMP: OSRAM SYLVANIA
 50MR16/IR/NFL25
 TRIM: Open Appearance
 Specular
 EFFIC: 73.1% (30°)
 71.2% (45°)



D	FC	L	W	CB
4.0	225	1.8	1.7	2.3
6.0	100	2.8	2.5	3.5
7.0	74	3.2	2.9	4.0
8.0	56	3.7	3.3	4.6
9.0	44	4.1	3.7	5.2
10.0	36	4.6	4.1	5.8
12.0	25	5.5	5.0	6.9
14.0	18	6.4	5.8	8.1

ITL TEST: #59003


D	FC	L	W	CB
2.0	230	1.9	1.2	3.5
3.0	102	2.8	1.9	5.2
4.0	57	3.8	2.5	6.9
5.0	37	4.7	3.1	8.7
6.0	26	5.6	3.7	10.4
8.0	14	7.5	5.0	13.9
10.0	9	9.4	6.2	17.3
12.0	6	11.3	7.5	20.8

ITL TEST: #59003

D	FC	L	W	CB
2.0	546	1.2	1.0	2.0
3.0	243	1.8	1.5	3.0
4.0	136	2.5	2.0	4.0
5.0	87	3.1	2.5	5.0
6.0	61	3.7	3.0	6.0
8.0	34	4.9	4.0	8.0
10.0	22	6.1	4.9	10.0
12.0	15	7.4	5.9	12.0

ITL TEST: #59170

LAMP: OSRAM SYLVANIA
 50MR16/IR/FL35/C
 TRIM: Open Appearance
 Specular
 EFFIC: 75.6% (30°)
 72.7% (45°)



D	FC	L	W	CB
4.0	121	2.5	2.6	2.3
6.0	54	3.8	3.9	3.5
7.0	40	4.4	4.5	4.0
8.0	30	5.1	5.2	4.6
9.0	24	5.7	5.8	5.2
10.0	19	6.3	6.4	5.8
12.0	13	7.6	7.7	6.9
14.0	10	8.9	9.0	8.1

ITL TEST: #59004

D	FC	L	W	CB
2.0	166	1.9	1.7	3.5
3.0	74	2.9	2.5	5.2
4.0	41	3.9	3.4	6.9
5.0	26	4.8	4.2	8.7
6.0	18	5.8	5.1	10.4
8.0	10	7.7	6.8	13.9
10.0	7	9.7	8.5	17.3
12.0	5	11.6	10.2	20.8

ITL TEST: #59004

D	FC	L	W	CB
2.0	305	1.6	1.5	2.0
3.0	135	2.4	2.3	3.0
4.0	76	3.1	3.0	4.0
5.0	49	3.9	3.8	5.0
6.0	34	4.7	4.5	6.0
8.0	19	6.3	6.0	8.0
10.0	12	7.8	7.5	10.0
12.0	8	9.4	9.0	12.0

ITL TEST: #59172

Options

Transformer, Wattage and Voltage

- 58 For 277 volt line input.
- MG Magnetic (conventional) transformer instead.
- TD Toroidal magnetic transformer instead.

Lenses - Mounted Above Trim

- 15 C#73 prismatic tempered spread lens.
- FP Frosted prismatic tempered lens
- ML Microprismatic clear tempered lens.

Trims

- 30 All white acrylic enameled cone.
- 31 White acrylic enameled cone flange.
- 32 White oversize trim ring. Specify O.D.
- 33 Decorative tempered glass Glow Ring suspended trim assembly.
- 45 Gasket between trim flange and ceiling.

- 46 Gasket between trim and lens.
- 59 Dark Bronze specular self-flanged cone.
- 60 Softex Dark Bronze self-flanged cone.
- 63 Dune specular self-flanged cone.
- 69 Wheat specular self-flanged cone.
- 70 Softex Clear self-flanged cone.
- 71 Softex Dune self-flanged cone.
- 72 Black specular self-flanged cone.
- 77 Softex Pewter self-flanged cone.
- 79 Collar for ceilings up to 2 5/8" or consult factory.
- 91 Softex Wheat self-flanged cone.
- 93 Pewter specular self-flanged cone.
- 94 Custom color/finish. Specify. Consult factory.

Filter Holder / Filters (Specify 1 or 2)

- FL Filter holder with up to two filter capacity.
- AM Amber filter.
- CL Clear tempered glass filter.

- DP Dichroic Peach filter.
- GE Green / Botanical filter.
- HX Hexcel louver.
- LN Linear glass filter.
- MB Medium Blue filter.
- MP Softening microprismatic filter.
- PF Crystal prismatic filter.
- PK Pink / Rose filter.
- UF Ultraviolet filter.
- XF Filter other than shown. Specify make/model.

Other

- 99 Special modification. Consult factory.
- AT Air tight version. Exceeds ASTM E283 restricted airflow of 2 CFM maximum.
- DL Downlight cone instead. Clear specular finish standard or add optional trim selection.

SUBMITTAL DATA

JOB NAME

TYPE

WATTAGE

VOLTAGE

CATALOG NUMBER

APPROVAL STAMP

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE. INSTALLATION TO N.E.C. IN NORMAL USE. Manufacturer at the option will replace or repair such fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the offices of manufacturer within three years of manufacture. Liability of manufacturer is limited to the foregoing, and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any other person. This warranty is subject to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abuse of the fixture without prior written authorization from the manufacturer will render the warranty void.