

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

3" x 7" LED 6 SYSTEM WATTS

LNV-03121

Vandal Resistant LED StepLight



Specifications

LED

- White module (colored filters optional).
- 3500°K standard.
- 6 system watts - energy efficient, uniform, cool.

LED Power Supply / Driver

- 10 volt DC. Electronically stabilized.
- Minimum operating temperature -13°F (-25°C).
- 120-277 volt standard. Load insensitive.

Lens (Gasketed)

- 1/8" white polycarbonate.
- Secured between faceplate and housing by center pin tamperproof screws and captive nuts.
- Gasketing between lens and faceplate.

Faceplate (Gasketed)

- Gasketed aluminum trim; white finish standard.
- Secured to housing with two center pin tamperproof screws and captive nuts.
- Tamperproof tool included.

Housing

- Super shallow 2 1/2" depth. Cool. Acrylic enameled aluminum. Rustproof: Exceeds 1000 hour hour ASTM 5% salt spray test.

Installation

- Recesses indoors or outdoors, covered locations.
- Mounting holes provided on top, bottom and ends.


UL, C-UL (Canada) Listings

- Damp or dry locations.


5 FIVE YEAR
year Limited Warranty

- Complete standard fixture.

Performance at a Glance

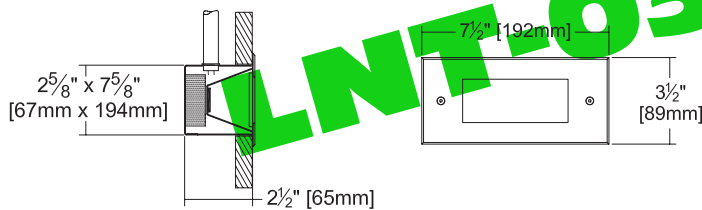

Footcandle Performance Opposite Fixture
Installed Top View

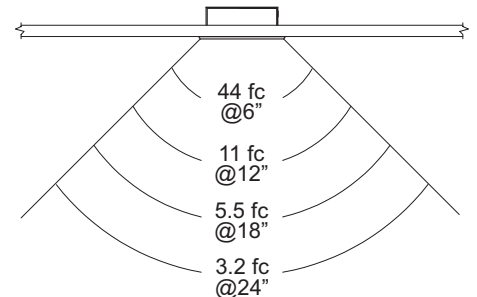

THE KIRLIN COMPANY

3401 EAST JEFFERSON AVENUE • DETROIT, MICHIGAN 48207-4232
(313) 259-6400 • Fax: (313) 259-9409 OR (313) 259-3121 • www.kirlinlighting.com

LATITUDES LED LIGHTING

CATALOG NUMBER

LNV-03121

DUE TO OUR CONTINUING EFFORT TO IMPROVE PRODUCTS, TECHNICAL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE. THE KIRLIN COMPANY EXPECTS PHOTOMETRIC PERFORMANCE TO IMPROVE SIGNIFICANTLY AND FREQUENTLY AS LED SOURCE TECHNOLOGY IMPROVES.

Options

Voltage / Battery Pack

- 97 Specify other voltage. Consult factory.
- EI Remote emergency inverter for 100% of rated lumens. Run time: 90+ minutes. 120 or 277V, 60 Hz input only. Specify voltage.
- HW Higher light output. Approximately doubles light output.

LED Filter Colors

- BL Blue Filter.
- GE Green filter.
- OR Orange Filter.
- RA Red/Amber Filter.
- YE Yellow filter.
- CF Custom color filter (Rosco). Specify.

Faceplate Finishes

- 35 Natural aluminum acrylic enamel.
- 37 Dark Bronze acrylic enamel.
- 88 Black acrylic enamel.
- 94 Custom color/finish. Specify. Consult factory.

Other

- 99 Special modification. Consult factory.

**THIS PRODUCT
IS NOW AS
AVAILABLE AS
CATALOG
NUMBER
LNT-03096-26**

SUBMITTAL DATA

JOB NAME
TYPE
WATTAGE
CATALOG NUMBER

VOLTAGE

APPROVAL STAMP

LIMITED WARRANTY: CATALOGED KIRLIN FIXTURES ARE WARRANTED FREE OF DEFECTS IN WORKMANSHIP OR MATERIAL FOR THREE YEARS FROM DATE OF PURCHASE, INSTALLED TO N.E.C. IN NORMAL USE. Manufacturer at the option will replace or repair each fixture or refund the purchase price on presentation of proof of purchase and defective fixture at the office of manufacturer within three years of original shipment. Liability of manufacturer is limited to the foregoing, and manufacturer shall not be liable for any other damages, direct or indirect, sustained or suffered by purchaser or any person. This warranty is supplied to the buyer in place of all other warranties, expressed or implied. Seller does not warrant as to merchantability or fitness for a particular use, nor will any oral statement constitute a warranty or amend this specific warranty. Abnormal use, abuse of the fixture, improper installation, or repair, or modification of the fixture without prior written authorization from the manufacturer will render the warranty void.