

CATALOG #	TYPE	
JOB NAME	WATTAGE	VOLTAGE

Lighting for Patient Spaces

Lensed Steplight 3" x 7" Steplight • LED

Super Shallow • Type IC • Optional LED Filter Colors

Specifications

LED

- White module (colored filters optional)
- 3500°K standard
- 5.5 system watts - energy efficient, uniform, cool

LED Power Supply/Driver

- Max 13 volt DC and 4 watt fixed output; electronically stabilized
- Minimum operating temperature -4°F (-20°C)
- 120-277 volt standard; load insensitive

Lens

- Translucent white 1/8" polycarbonate sealed to trim

Faceplate

- Gasketed aluminum frame pulls tight to wall

- White finish standard; optional colors
- Optional (white only) antimicrobial Kirlin BioGard™ finish; see Option-BG
- Tamper resistant available; see Options
- Removable for servicing

Housing: Shallow 2½" Depth

- Cool; acrylic enameled aluminum
- Rustproof: Exceeds 1000 hour ASTM 5% salt spray test
- Dissipates heat across entire surface area

Installation

- Recesses indoor or outdoor, covered locations
- Mounting holes on housing ends

MNT-03928



UL, C-UL (Canada) Listings


- Damp or dry locations
- Type IC; approved for direct contact with insulation

FIVE YEAR Limited Warranty

- Complete standard fixture



Options and Ordering Configuration

(Example: MNT-03928-BL-37-26)

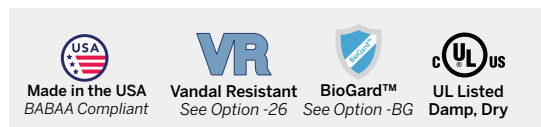

Required	Optional			
Model	Voltage/Battery Pack	Filter Colors	Faceplate Finishes	Other Options
MNT-03928	(Blank): Universal 120-277 V -97: Other voltage input; consult factory -EI: Remote emergency inverter for 100% of rated lumens; Run time: 90+ minutes; 120 or 277V, 60Hz input only; specify voltage	(Blank): None -BL: Blue filter -GE: Green filter -OR: Orange filter -RA: Red/Amber filter -YE: Yellow filter -CF: Custom color filter (Rosco); specify	(Blank): Standard white finish -35: Silver (natural aluminum) acrylic enamel -37: Dark bronze acrylic enamel -38: Black acrylic enamel -BG: BioGard™ anti-microbial white -BKBG: BioGard™ anti-microbial black -94: Custom color; consult factory -94BG: BioGard™ anti-microbial custom color finish	(Blank): None -26: Faceplate secured to housing with two center pin tamperproof screws; tamperproof tool included -99: Special modification; consult factory

Dimensions

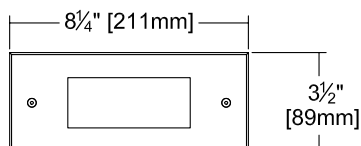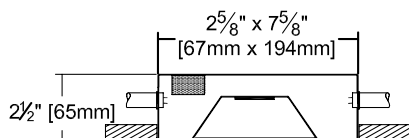

LED Filter Colors

